




NDP-25BPT, BVT flange

1Bar = 0,1MPa

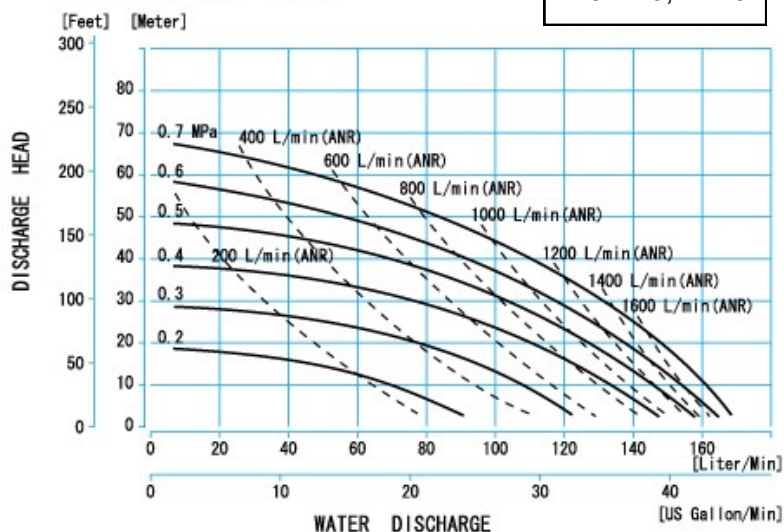

TECHNICAL DATA

Air supply pressure	0,2-0,7	MPa
Max. discharge volume/cycle	500	Cc
Max. discharge volume	150	L/min
Max. discharge pressure	0,7	MPa
Max. size of solids	4,8	mm
Max. suction lift dry	PTFE fitted	4,5 m
Max. suction lift wet	PTFE fitted	8,3 m
Max. fluid inlet pressure	PTFE fitted	0,03 MPa
Max. suction lift dry	Rubber fitted	- m
Max. suction lift wet	Rubber fitted	- m
Max. fluid inlet pressure	Rubber fitted	- MPa

Pump type NDP-P25BPT

(NDP-25BPT-PP)

Max. viscosity (neg. suc.)	5.000	Cp
Max. viscosity (flooded suction.)	10.000	Cp
Max. air consumption	1700	NL/min
Max. noise level	89	dB(a)
Operating temp. ambient	70	°C
Max operating temp. fluid		
Diaphragm compound		
Diaphragm compound	PTFE	82 °C
Diaphragm compound		
Net Weight	Type P	PPG
	11,0	Kg


Caution! Data based on water (1 Cp)

Wetted parts: Pump chambers + manifolds

PPG - Polypropylene reinforced with glass fiber

Motor

PPG - Polypropylene reinforced with glass fiber

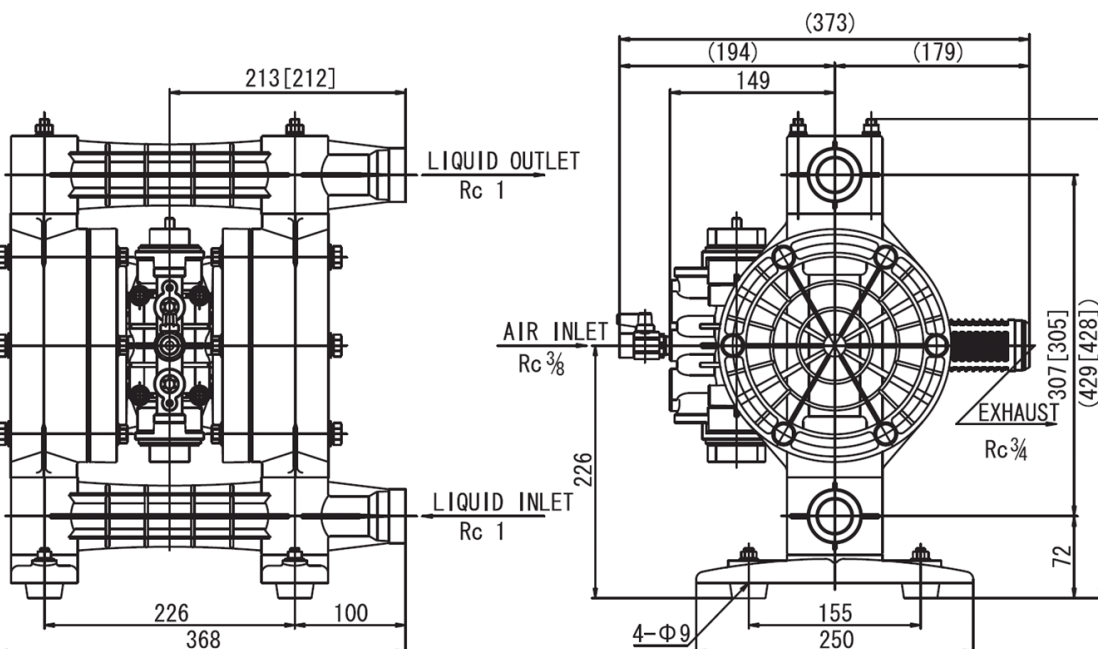

Max pressure vs temperature

