SINDBY
A BIBUS GROUP COMPANY

SINDBY PROFILES 4

A/S H. Sindby & Co.

Gummi til industri og autobranchen
Hos A/S H. Sindby & Co. har vi beskæftiget os med gummiprofiler, kantlister, svampegummi og gummimåtter i knap 100 år. Vi har således en solid erfaring på området og besvarer gerne spørgsmål vedr. kemisk modstandsdygtighed, UV belastning, hårdhedsområde, trækstyrke, brudforlængelse, max. temperaturområde, slidstyrke, bestandighed o.s.v.
Alle profiler/gummiplader er lagervarer, hvis ikke andet er opgivet. Specialprofiler leveres efter ordre.
Vi løser alle opgaver - spørg os og få løsningen.

Note
Tegningerne i dette katalog er ikke målfaste.
Visse profiler i dette katalog lagerføres ikke men hjemtages kun på bestilling og ud fra mængde.
Afklippede profiler tages ikke retur.
Alle mål er i mm, hvis ikke andet er opgivet.

Rubber for industry and automotive sector
At A/S H. Sindby & Co. we have been working with rubber profiles, edge profiles, sponge rubber and rubber plates for almost 100 years. We therefore have a thorough knowlege in this area and are always at your disposal if you have questions concerning chemical resistance, UV impact, hardness, tractive power, elongation at break, max. temperature range, resistance, constancy etc.
All profiles / rubber plates in the catalogue are stock items unless otherwise stated. Special profiles can be supplied to order.
We can offer our assistance in all kinds of projects - ask us and we have the solution.

Note
The drawings in this catalouge are not fixed.
Certain profiles in this catalogue are not in stock and are only stocked ion order.
Profiles wich are cut off cannot be returned.
Alle measures are in mm unless otherwise stated.

Keld Asp Hansen
Adm. direktør
Managing Director

Her finder du SINDBY / Here you will find SINDBY

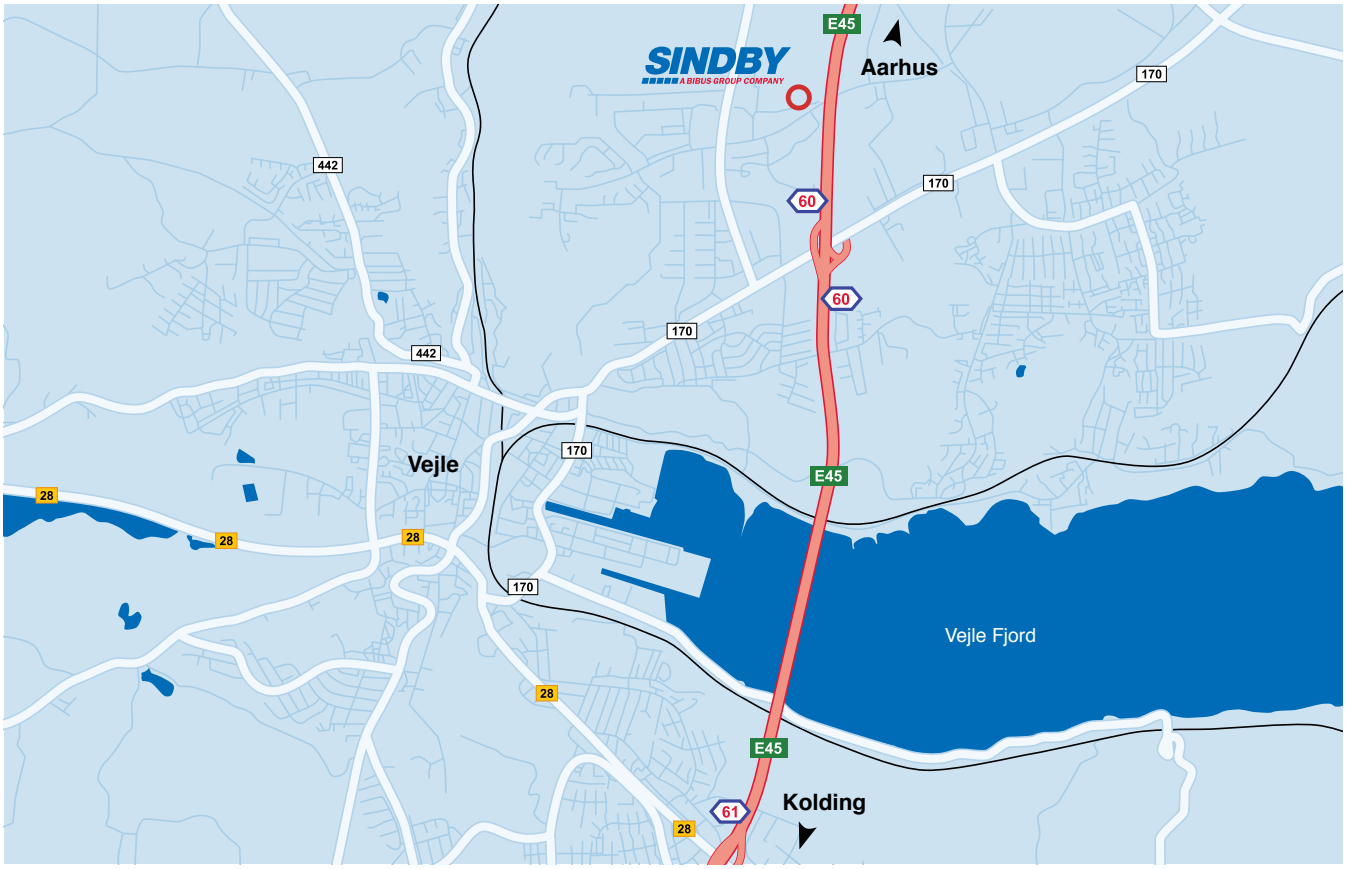

A/S H. Sindby & Co. • Edisonvej 11 • DK-7100 Vejle

Indholdsfortegnelse / Table of content

Kantlister / Edge trims 2
Silikonekantlister / Silicone edge trims 14
POM-profiler / POM edge trims 16
Gummisnor / Rubber cord profiles 18
Specialprofiler / Special profiles 19
Co-ekstruderede plastprofiler / Co-extruded plastic profiles 30
U-profiler / U-profiles 33
P-profiler / P-profiles 38
Rudeprofiler / Glazing sections 40
Låsekiler / Glazing sections 43
Svampegummi / Sponge rubber 44
Glasbånd / Window seals 51
Cellegummi / Cellular rubber 52
Fenderlister / Fender lists 53
Sico Trim / Sico Trim 56
Gummibuffer / Rubber buffer 59
Vibrationsdæmpere / Vibration muffler 65
Fendere / Fenders 70
Børste- og flock-lister / Brush sections 76
Lydisolering / Soundproofing 79
Kinagummiplader / Rubber sheets from China 82
Øvrige europæiskproducerede måtter / Additional mats produced in Europe 87
Gummimåtter / Rubber mats 88
Gummistropper / Rubber straps 95
Bumpers / Bumpers 97
Poliall / Poliall 98
Oppustelige tætninger / Inflatable seals 99
Portsluser og tilbehør / Dock shelters 101
Tilbehør / Equipment 105
Varenummerindex / product number index 108
Egenskaber / Properties 113

Kantlister / Edge trims

33.306



Edge trim: PVC black + bi
Grip range: 1 - 2 mm
Hardness: SH 78 / 65
Insert: 15 x 0,3 mm steel

33.409F



Edge trim: EPDM
Grip range: 1 - 2 mm
Hardness: SH 60
Insert: Steel
Flame retardent EN 45545

33.409 / 33.401G



Edge trim: PVC black
Grip range: 1 - 2 mm
Hardness: SH 78
Insert: 16 x 0,3 mm steel
33.401G (grey)

33.307A



Edge trim: PVC black
Grip range: 1 - 2 mm
Hardness: SH 75
Insert: 17,5 x 0,3 mm steel
On cardboard coil

33.410X / 33.410XG



Edge trim: PVC black
Grip range: 1 - 2 mm
Hardness: SH 75
Insert: 17,5 x 0,3 mm steel
33.410XG (grey)

33.310X



Edge trim: PVC black
Grip range: 1 - 3 mm
Hardness: SH 75
Insert: 26 x 0,47 mm steel

33.310SS



Edge trim: PVC black
Grip range: 1 - 2,5 mm
Hardness: SH 70 - 75
Insert: 26 x 0,5 mm stainless steel SS 304

33.310SS-316



Edge trim: PVC black
Grip range: 1 - 2,5 mm
Hardness: SH 70 - 75
Insert: 26 x 0,5 mm stainless steel SS 316 (acid-proof)

33.422



Edge trim: TPE flexible
Grip range: 1 - 2,5 mm
Hardness: SH 82
Insert: 25 x 0,48 mm steel

33.309XM



Edge trim: PVC mokka brown
Grip range: 1 - 2,5 mm
Hardness: SH 78
Insert: Steel
Current stock avaliable

33.003



Edge trim: PVC black
Grip range: 1 - 2,5 mm
Hardness: SH 78
Insert: Steel
Current stock avaliable

33.418SS



Edge trim: PVC black + bi
Grip range: 1,5 - 3 mm
Hardness: SH 78 / 78
Insert: 26 x 0,5 mm stainless 304 steel

33.308A



Edge trim: PVC black
Grip range: 1 - 4 mm
Hardness: SH 75
Insert: 26 x 0,47 mm steel
On cardboard coil

33.432



Edge trim: EPDM
Grip range: 1 - 3 mm
Hardness: SH 65
Insert: 27 mm wire

33.438



Edge trim: EPDM
Grip range: 1,5 - 3,5 mm
Hardness: SH 65
Insert: 29 x 0,5 mm steel

33.420X



Edge trim: PVC black
Grip range: 1 - 4 mm
Hardness: SH 75
Insert: 27 x 0,47 mm steel

33.420F



Edge trim: EPDM
Grip range: 1 - 3 mm
Hardness: SH 65
Insert: 26 x 0.5 mm steel
Flame retardent NNF 16-101
Min. order: 500 m.

33.419



Edge trim: PVC black
Grip range: 1 - 4 mm
Hardness: SH 78
Insert: 31 x 0,5 mm steel

33.411



Edge trim: PVC grey
Grip range: 2,5 - 4 mm
Hardness: SH 78
Insert: 29 x 0,48 mm steel

33.411A *



Edge trim: PVC grey
Grip range: 1 - 4 mm
Hardness: SH 78
Insert: 31 x 0,5 mm steel
Min. order: 2.000 mtr.

33.418X



Edge trim: PVC black + bi
Grip range: 2 - 5 mm
Hardness: SH 75 / 75
Insert: 26 x 0,47 mm steel
White lips

33.420FX



Edge trim: EPDM
Grip range: 1 - 3 mm
Hardness: SH 60
Insert: 26 x 0,5 mm steel
Flame retardent EN 45545

33.425G



Edge trim: PVC grey
Grip range: 3 - 4 mm
Hardness: SH 78
Insert: 35 x 0,48 mm steel
Min. order: 2.000 m

33.434



Edge trim: EPDM
Grip range: 2 - 4 mm
Hardness: SH 65
Insert: 30 mm wire

33.419A



Edge trim: PVC black
Grip range: 2 - 4 mm
Hardness: SH 75
Insert: 15 x 0,5 mm steel

33.423



Edge trim: PVC black
Grip range: 2,5 - 5 mm
Hardness: SH 78
Insert: Steel
Current stock avaliable

33.427X



Edge trim: PVC black + bi
Grip range: 1,5 - 4,5 mm
Hardness: SH 75 / 75
Insert: 30 x 0,47 mm steel
Yellow lips

33.094X



Edge trim: PVC black + bi
Grip range: 1 - 4 mm
Hardness: SH 75 / 75
Insert: 30 x 0,47 mm steel
Yellow lips

33.419A



Edge trim: PVC black
Grip range: 2 - 4 mm
Hardness: SH 75
Insert: 16,5 x 11 mm

33.1153A



Edge trim: PVC Black
Grip range: 6 - 8 mm
Hardness: SH 78
Insert: 32 mm steel

33.1153GA



Edge trim: PVC Grey
Grip range: 6 - 8 mm
Hardness: SH 78
Insert: 32 mm steel

33.415



Edge trim: PVC
Grip range: 5 - 7 mm
Hardness: SH 78
Insert: 29 x 0,48 mm steel

* **Skaffevare** / Special order item

Kantlister / Edge trims

33.426XA



Hardness: SH 78
Insert: 32 mm
Min. order: 2.000 m

33.426A



Hardness: SH 78 / 65
Insert: 32 mm
Min. order: 3.000 m

33.426GA



Edge trim: Grey
Insert: 32 mm
Min. order: 3.000 m

33.426X



Edge trim: PVC black
Grip range: 4,5 - 7 mm
Hardness: SH 75
Insert: 30 x 0,8 mm steel

33.426



Edge trim: PVC + bi
Grip range: 4,5 - 7 mm
Hardness: SH 78 / 65
Insert: 29 x 0,48 mm steel

33.426G *



Edge trim: Grey PVC + bi
Grip range: 4,5 - 7 mm
Hardness: SH 78 / 65
Insert: 29 x 0,48 mm steel
Min. order 1.000 m

33.433



Edge trim: EPDM
Grip range: 4 - 6 mm
Hardness: SH 70
Insert: 33 x 0,47 mm steel
Flame retardent EPDM DIN5510-2

33.1154



Edge trim: PVC black
Grip range: 6 - 8 mm mm
Hardness: SH 75 / 75
White lips

33.428 / 33.428G



Edge trim: PVC black + bi
Grip range: 10 - 12 mm
Hardness: SH 78
Insert: 36 x 0,5 mm steel
33.428G (grey)

33.1155



Edge trim: PVC black
Grip range: 15 - 16 mm
Hardness: SH 85
Insert: Steel

33.1156



Edge trim: PVC black
Grip range: 18 - 19 mm
Hardness: SH 85
Insert: Steel

33.354



Edge trim: PVC+bi / sponge rubber
Grip range: 1 - 2 mm
Hardness: SH 78 / 57 / density 0,55
Insert: 16 x 0,3 mm steel

33.368 *



Edge trim: EPDM co-ex
Grip range: 0,5 - 1,5 mm
Hardness: SH 60 / density 0,55
Insert: wire
Min. order: 6.000 mtr.

33.468F



Edge trim: EPDM co-ex
Grip range: 1 - 2 mm
Hardness: SH 60 / density 0,8
Insert: 22 x 0,75 mm wire
Flame retardent EN 45545

33.468X



Edge trim: EPDM co-ex
Grip range: 1 - 2 mm
Hardness: SH 60 / density 0,55
Insert: 22 x 0,75 mm wire

33.468B *



Edge trim: EPDM co-ex
Grip range: 1 - 2 mm
Hardness: SH 70 / density 0,55
Insert: 22 mm wire
Min. order: 3.000 mtr.

* **Skaffevare** / Special order item

33.358C *



Edge trim: EPDM co-ex
Grip range: 0,8 - 2,5 mm
Hardness: SH 65
Insert: 25 x 0,5 mm steel
Min. order: 3.000 m

33.021



Edge trim: EPDM co-ex
Grip range: 0,8 - 2 mm
Hardness: SH 70 / density 0,55
Insert: 25 mm wire

33.358X



Edge trim: EPDM co-ex
Grip range: 1 - 3,5 mm (1 - 3 mm)
Hardness: SH 70 / density 0,55
Insert: 26 x 0,5 mm
Unbroken

33.358B



Edge trim: EPDM co-ex
Grip range: 1 - 3 mm
Hardness: SH 70 / density 0,55
Insert: 27 mm

33.370NBR



Edge trim: NBR co-ex
Grip range: 1 - 3 mm
Hardness: SH 70 / density 0,55
Insert: Wire
Oil resistant

33.371A *



Edge trim: EPDM co-ex
Grip range: 1 - 3 mm
Hardness: SH 60 / density 0,55
Insert: 26 x 0,76 mm wire
Min. order: 5.500 m

33.371E EMV - EMC - EMI *



Edge trim: EPDM co-ex
Grip range: 1 - 3 mm
Hardness: SH 70 / density 0,55
Insert: Wire
Electromagnetic compatibility. On demand

33.371F



Edge trim: EPDM co-ex
Grip range: 1 - 3 mm
Hardness: SH 65 / density 0,6
Insert: 26 x 0,75 mm wire
Flame retardent NFF16-101
Min. 4.000 m

33.469X



Edge trim: PVC+bi / sponge rubber
Grip range: 1,5 - 3,5 mm
Hardness: SH 75 / 63
density 0,6 - 0,85
Insert: 26 x 0,47 mm steel

33.371FX



Edge trim: EPDM co-ex
Grip range: 1 - 3 mm
Hardness: SH 60 / density 0,8
Insert: 26 x 0,75 mm wire
Flame retardent EN 45545

33.371X



Edge trim: EPDM co-ex
Grip range: 1 - 3,5 mm (1 - 3 mm)
Hardness: SH 70 / density 0,55
Insert: 27 mm wire

33.369



Edge trim: EPDM co-ex
Grip range: 2 - 4 mm
Hardness: SH 65 / density 0,6
Insert: Wire

33.481



Edge trim: PVC + bi / spongerubber
Grip range: 1 - 4 mm
Hardness: SH 57 / 78 / density 0,55
Insert: Steel

33.353NBR



Edge trim: Co-ex
Grip range: 3 - 4 mm
Hardness: SH 70 / density 0,55
Insert: 31 x 0,5 mm
Min. order: 3.000 m

33.353S *



Edge trim: EPDM co-ex
Grip range: 3 - 4 mm
Hardness: SH 65 / density 0,6
Insert: 31 x 0,5 mm steel
Min. order: 6.000 m

33.353



Edge trim: EPDM co-ex
Grip range: 3 - 5 mm
Hardness: SH 65 / density 0,6
Insert: 32 mm steel

* **Skaffevare** / Special order item

Kantlister / Edge trims

33.352 *



Edge trim: EPDM co-ex
Grip range: 5 - 6 mm
Hardness: SH 78 / density 0,6
Insert: 31 x 0,5 mm
Min. order: 2.000 m

33.362FX



Edge trim: EPDM co-ex
Grip range: 1 - 3,5 mm
Hardness: SH 60 / density 0,8
Insert: 26 x 0,75 mm wire
Flame retardent EN 45545

33.357X



Edge trim: PVC / sponge rubber
Grip range: 5 - 7 mm
Hardness: SH 78 / density 0,6
Insert: 31 x 0,5 mm

33.359X



Edge trim: EPDM co-ex
Grip range: 1,5 - 4 mm
Hardness: SH 70 / density 0,6 - 0,85
Insert: 25 wire

33.362B *



Edge trim: EPDM co-ex
Grip range: 1 - 3,5 mm
Hardness: SH 70 / density 0,55
Insert: 26 x 0,76 mm wire
Min. order: 5.500 m

33.362A *



Edge trim: EPDM co-ex
Grip range: 1 - 2,5 mm
Hardness: SH 70 / density 0,55
Insert: 26 x 0,76 mm wire
Min. order: 5.500 m

33.353X



Edge trim: EPDM co-ex
Grip range: 4 - 6 mm
Hardness: SH 65 / density 0,6
Insert: 33 mm steel

33.376



Edge trim: EPDM co-ex
Grip range: 1 - 3,5 mm
Hardness: SH 70 / density 0,75
Insert: 27 mm steel

33.361 *



Edge trim: EPDM co-ex
Grip range: 1 - 4 mm
Hardness: SH 70 / density 0,55
Insert: 26 x 0,5 mm steel
Min. order: 5.500 m

33.361B *



Edge trim: EPDM co-ex
Grip range: 1 - 2,5 mm
Hardness: SH 65 / density 0,55
Insert: 26 x 0,76 mm wire
Min. order: 5.500 m

33.360



Edge trim: EPDM co-ex
Grip range: 1 - 2,5 mm
Hardness: SH 60 / density 0,6
Insert: 27 x 0,75 mm wire

33.360NBR *



Edge trim: NBR co-ex
Grip range: 1 - 3 mm
Hardness: SH 70 / density 0,55
Insert: 27 x 0,75 wide
Oil resistant
Min. order: 4.000 m

33.377



Edge trim: EPDM co-ex
Grip range: 1 - 3,5 mm
Hardness: SH 70 / density 0,75
Insert: 27 mm wire

33.360F



Edge trim: EPDM co-ex
Grip range: 2 - 4 mm
Hardness: SH 65 / density 0,6
Insert: 27 x 0,76 mm wire
Flame retardent NFF16-101
Min. 3.000 m

33.360X



Edge trim: EPDM co-ex
Grip range: 1 - 3 mm
Hardness: SH 70 / density 0,6
Insert: 27 x 0,75 mm wire

33.365X



Edge trim: PVC+bi sponge rubber
Grip range: 1 - 4 mm
Hardness: SH 75 / 63 / density 0,6 - 0,85
Insert: 26 x 0,47 mm steel

* **Skaffevare** / Special order item

33.362F *



Edge trim: EPDM co-ex
Grip range: 2 - 4 mm
Hardness: SH 65 / density 0,6
Insert: 29 x 0,5 mm steel
Min. order: 1.000 m
Flame retardent BS6853 and DIN5510

33.374



Edge trim: EPDM co-ex
Grip range: 1,5 - 4 mm
Hardness: SH 70 / density 0,55
Insert: 27 x 0,47 mm steel

33.362D *



Edge trim: EPDM co-ex
Grip range: 2 - 4 mm
Hardness: SH 65 / density 0,6
Insert: 27 x 0,75 mm wire
Min. order: 4.029 m

33.360R



Edge trim: PVC sponge rubber
Grip range: 1 - 2,5 mm
Hardness: SH 77 / density 0,65 - 0,75
Insert: 26 x 0,5 mm stainless 304 steel

33.362E *



Edge trim: EPDM co-ex
Grip range: 3 - 5 mm
Hardness: SH 65 / density 0,6
Insert: 26 x 0,5 mm steel
Min. order: 4.050 m

33.362



Edge trim: EPDM co-ex
Grip range: 1 - 3,5 mm
Hardness: SH 70 / density 0,6
Insert: 26 x 0,76 mm wire

33.362C *



Edge trim: EPDM co-ex
Grip range: 1,5 - 3 mm
Hardness: SH 65 / density 0,6
Insert: 26 x 0,5 mm steel
Min. order: 4.050 m

33.025



Edge trim: EPDM co-ex
Grip range: 1,5 - 3,5 mm
Hardness: SH 70 / density 0,55
Insert: 27 x 0,47 mm steel

33.367



Edge trim: EPDM solid balloon
Grip range: 16 mm
Hardness: SH 60
Insert: 52 x 0,76 mm wire

33.380



Edge trim: EPDM co-ex
Grip range: 2 - 4 mm
Hardness: SH 70 / density 0,55
Insert: 29 mm wire

33.379



Edge trim: EPDM co-ex
Grip range: 2,5 - 5 mm
Hardness: SH 70 / density 0,55
Insert: 33 mm wire

33.378



Edge trim: EPDM co-ex
Grip range: 1,5 - 5 mm
Hardness: SH 70 / density 0,55
Insert: 33 mm wire

33.375



Edge trim: EPDM co-ex
Grip range: 4 - 5 mm
Hardness: SH70 / density 0,6 - 0,85
Insert: 27 mm wire

33.463



Edge trim: PVC+bi / sponge rubber
Grip range: 4 - 6 mm
Hardness: SH78/57 density 0,55
Insert: 31 x 0,5 mm steel

33.355B



Edge trim: EPDM solid balloon
Grip range: 3 - 5 mm
Hardness: SH 60
Insert: 31 x 0,5 mm steel unbroken

33.408X



Edge trim: PVC+bi / sponge rubber
Grip range: 1 - 2 mm
Hardness: SH 78 / 57 density 0,55
Insert: 16 x 0,3 mm steel

* **Skaffevare** / Special order item

33.404 *



Edge trim: EPDM co-ex
Grip range: 1 - 2,5 mm
Hardness: SH 60 / density 0,55
Insert: 20 x 0,76 mm wire
Min. order: 5.500 m

33.407X



Edge trim: EPDM co-ex
Grip range: 0,8 - 2,5 mm
Hardness: SH 60 / density 0,55
Insert: 22 x 0,75 mm wire

33.403 *



Edge trim: EPDM co-ex
Grip range: 1 - 2 mm
Hardness: SH 70 / density 0,55
Insert: 20 x 0,76 mm wire
Min. order: 15.000 m

33.403F



Edge trim: EPDM co-ex
Grip range: 1 - 2 mm
Hardness: SH 60 / density 0,8
Insert: 22 x 0,75 mm wire
Flame retardent EN 45545

33.405 *



Edge trim: EPDM co-ex
Grip range: 1 - 2 mm
Hardness: SH 70 / density 0,55
Insert: Wire
Min. order: 5.500 m

33.9779



Edge trim: EPDM co-ex
Grip range: 1,5 - 3 mm (1 - 4 mm)
Hardness: SH 70 / density 0,65
Insert: 25 x 0,5 mm steel

33.395A



Edge trim: EPDM co-ex
Grip range: 2 mm
Hardness: SH 60 / density 0,6
Insert: 26 x 0,75 mm wire

33.395F



Edge trim: EPDM co-ex
Grip range: 1 - 3 mm
Hardness: SH 60 / density 0,8
Insert: 26 x 0,75 mm wire
Flame retardent EN 45545

33.395X



Edge trim: EPDM co-ex
Grip range: 1 - 3 mm
Hardness: SH 70 / density 0,55
Insert: Wire

33.398



Edge trim: NBR co-ex
Grip range: 2 mm
Hardness: SH 60 / density 0,55
Insert: 27 x 0,76 mm wire
Oil resistant

33.381



Edge trim: EPDM co-ex
Grip range: 1 - 2,5 mm
Hardness: SH 70 density 0,55
Insert: Wire

33.444A



Edge trim: EPDM co-ex
Grip range: 1,5 - 4 mm
Hardness: SH 70 / density 0,55
Insert: Wire
Min. order: 1.000 m

33.372X



Edge trim: PVC + sponge rubber
Grip range: 1 - 3,5 mm
Hardness: SH 75 / 75 / density 0,6 - 0,85
Insert: 22 x 0,47 mm steel

33.506 *



Edge trim: EPDM co-ex
Grip range: 1 - 2,5 mm
Hardness: SH 70 / density 0,6
Insert: 30 x 0,47 mm steel
On demand min. 4.000 m

33.480



Edge trim: EPDM co-ex
Grip range: 1 - 3,5 mm
Hardness: SH 70 / density 0,55
Insert: Steel

33.396



Edge trim: EPDM co-ex
Grip range: 1 - 3 mm
Hardness: SH 70 density 0,6 - 0,85
Insert: 27 mm wire

* **Skaffevare** / Special order item

33.444X



Edge trim: PVC + sponge rubber
Grip range: 1 - 3,5 mm
Hardness: SH75/75/density 0,6-0,86
Insert: 26 x 0,47 mm steel
Red lips

33.319



Edge trim: EPDM co-ex
Grip range: 1 - 3 mm
Hardness: SH 70 / density 0,6 0,85
Insert: Wire

33.319F *



Edge trim: EPDM co-ex
Grip range: 1 - 2 mm
Hardness: SH 70 / density 0,6
Insert: 26 x 0,75 mm wire
Flame retardent NFF16-101
Min. order: 3.000 m

33.323



Edge trim: EPDM co-ex
Grip range: 1,5 - 3,5 mm
Hardness: SH 70
density 0,6 - 0,85
Insert: 27 mm

33.324CR



Edge trim: CR co-ex
Grip range: 1 - 3,5 mm
Hardness: SH70 / density 0,6 - 0,85
Insert: 29 mm wire
Conditional oil resistant

33.338 *



Edge trim: EPDM co-ex
Grip range: 1,5 - 3 mm
Hardness: SH 60 / density 0,55
Insert: 29 x 0,76 mm wire
Min. order: 5.000 m

33.338F



Edge trim: EPDM co-ex
Grip range: 1,5 - 3 mm
Hardness: SH 65 / density 0,60
Insert: 30 x 0,75 mm wire
Flame redardent EN45545

33.336 *



Edge trim: EPDM co-ex
Grip range: 1,5 - 3,5 mm
Hardness: SH 70 / density 0,55
Insert: 26 x 0,5 mm steel
Min. order: 5.000 m

33.450NBR



Edge trim: NBR co-ex
Grip range: 4 - 6 mm (3 - 6 mm)
Hardness: SH 70 / density 0,55
Insert: 34 x 0,5 mm steel
Oil resistant

33.457



Edge trim: EPDM co-ex
Grip range: 5 - 6 mm
Hardness: SH 60 / density 0,6
Insert: 32 x 0,6 mm steel
unbroken

33.457ST



Edge trim: EPDM co-ex
Grip range: 5 - 6 mm
Hardness: SH 60 / density 0,55
Insert: 31 x 0,76 mm wire

33.449



Edge trim: PVC+bi / sponge rubber
Grip range: 1 - 4 mm
Hardness: SH78/57 / density 0,55
Insert: 26 x 0,5 mm steel

33.321



Edge trim: EPDM co-ex
Grip range: 1 - 3,5 mm
Hardness: SH 70 / density 0,6 - 0,85
Insert: 27 mm wire

33.452R



Edge trim: PVC+bi / sponge rubber
Grip range: 2 - 4 mm
Hardness: SH 78 / 65
density 0,65 - 0,75
Insert: 29 x 0,48 mm stainless steel

33.457S-6



Edge trim: EPDM co-ex
Grip range: 3 - 6 mm
Hardness: SH 70 / density 0,6
Insert: 32 x 0,47 steel

33.024



Edge trim: EPDM co-ex
Grip range: 2 - 4 mm (2 - 5 mm)
Hardness: SH 70 / density 0,55
Insert: 33 mm wire

* **Skaffevare** / Special order item

33.454X



Edge trim: EPDM co-ex
Grip range: 2 mm
Hardness: SH 70 / density 0,55
Insert: 27 x 0,76 mm wire

33.335



Edge trim: EPDM co-ex
Grip range: 1,5 - 3,5 mm
Hardness: SH70/density 0,55-0,85
Insert: 27 mm wire

33.457S-4 *



Edge trim: EPDM co-ex
Grip range: 2 - 4 mm
Hardness: SH 70 / density 0,6
Insert: Steel
Min. order: 3.000 m

33.333 *



Edge trim: EPDM co-ex
Grip range: 1 - 3 mm
Hardness: SH 65 / density 0,6
Insert: 29 x 0,5 mm steel
Min. order: 4.000 m

33.451E



Edge trim: EPDM co-ex

33.020



Edge trim: EPDM co-ex
Grip range: 1,5 - 3 mm
Hardness: SH 70 / density 0,55
Insert: 27 x 0,47 mm steel

33.332X *



Edge trim: EPDM co-ex
Grip range: 5 - 6 mm
Hardness: SH 70 / density 0,6
Insert: 33 x 0,5 steel
Min. order: 5.000 m

33.470



Edge trim: EPDM co-ex
Grip range: 5 - 8 mm
Hardness: SH 70 / density 0,6
Insert: 36 x 0,5 mm steel

33.339X



Edge trim: PVC+bi / sponge rubber
Grip range: 2,5 - 4 mm
Hardness: SH 78 / 65
Insert: Steel

33.456



Edge trim: EPDM co-ex
Grip range: 5 - 6 mm
Hardness: SH 70 / density 0,6
Insert: 30 x 0,6 mm steel

33.12116 *



Edge trim: EPDM co-ex
Grip range: 1 - 4 mm
Hardness: SH 70 / density 0,6 - 0,85
Insert: 29 mm wire
Min. order: 3.000 m

33.328 *



Edge trim: EPDM co-ex
Grip range: 1,5 - 2,5 mm
Hardness: SH 65 / density 0,6
Insert: 29 x 0,5 mm steel
Min. order: 4.000 m

33.022



Edge trim: EPDM co-ex
Grip range: 1,5 - 3 mm (1,5 - 4 mm)
Hardness: SH 70 / density 0,6
Insert: 33 mm wire

33.340



Edge trim: EPDM co-ex
Grip range: 2 - 4 mm
Hardness: SH 70
Insert: 29 x 0,74 mm steel

33.332B



Edge trim: EPDM co-ex
Grip range: 3 - 6 mm
Hardness: SH 70 / density 0,55
Insert: 32 mm Steel

33.453X



Edge trim: PVC + sponge rubber
Grip range: 1 - 3,5 mm
Hardness: SH75/75 density 0,6-0,85
Insert: 26 x 0,47 mm steel

* **Skaffevare** / Special order item

33.320 *



Edge trim: EPDM co-ex
Grip range: 1 - 2,5 mm
Hardness: SH 65 / density 0,6
Insert: 29 x 0,5 mm steel
Min. order: 4.000 m

33.019



Edge trim: EPDM co-ex
Grip range: 1 - 4 mm
Hardness: SH 70 / density 0,6 - 0,85
Insert: Steel

33.447



Edge trim: EPDM co-ex
Grip range: 2,5 - 5 mm
Hardness: SH 70 / density 0,6
Insert: Steel

33.455



Edge trim: EPDM co-ex
Grip range: 4 - 6 mm
Hardness: SH 70 / density 0,6
Insert: Steel unbroken

33.452X



Edge trim: PVC+bi / sponge rubber
Grip range: 2 - 4 mm
Hardness: SH 78 / 65
density 0,65 - 0,75
Insert: 29 x 0,48 mm

33.326



Edge trim: EPDM co-ex
Grip range: 1,5 - 4 mm
Hardness: SH70/density 0,55 - 0,85
Insert: 33 mm wire

33.464



Edge trim: EPDM co-ex
Grip range: 1,5 - 3,5 mm
Hardness: SH 70 / density 0,6
Insert: 31 x 0,75 mm wire

33.331



Edge trim: PVC + sponge rubber
Grip range: 6 - 8 mm
Hardness: SH75/75 density 0,6-0,85
Insert: 30 x 0,47 mm steel
White lips

33.456F



Edge trim: EPDM co-ex
Grip range: 2 - 4 mm
Hardness: SH 65 / density 0,6
Insert: 31 x 0,75 mm wire
Flame retardent NFF16-101
Min. order: 3.000 m

33.478



Edge trim: EPDM co-ex
Grip range: 16 mm
Hardness: SH 60 / density 0,6
Insert: 52 x 0,76 mm wire

33.458X



Edge trim: EPDM solid lip
Grip range: 1 - 2,5 mm
Hardness: SH 60
Insert: 26 x 0,76 mm wire

33.458A



Edge trim: EPDM co-ex
Grip range: 1 - 3 mm
Hardness: SH 70
Insert: Wire

33.465C



Edge trim: EPDM solid lip
Grip range: 2 - 4 mm
Hardness: SH 70
Insert: 27 x 0,76 wire

33.465X



Edge trim: EPDM solid lip
Grip range: 1 - 3 mm
Hardness: SH 60
Insert: 26 x 0,76 mm wire

33.479



Edge trim: EPDM co-ex
Grip range: 2 - 4 mm
Hardness: SH 70 / density 0,6
Insert: Steel

33.465B *



Edge trim: EPDM solid lip
Grip range: 1 - 3 mm
Hardness: SH 70
Insert: 27 x 0,5 mm steel unbroken
Min. ordre: 3.000 m

* **Skaffevare** / Special order item

33.459P



Edge trim: PVC solid lip
Grip range: 1 - 2,5 mm
Hardness: SH 57
Insert: 24 x 0,5 mm steel unbroken

33.459X



Edge trim: EPDM solid lip
Grip range: 1 - 2,5 mm
Hardness: SH 60
Insert: 26 x 0,76 mm wire

33.459B



Edge trim: EPDM solid lip
Grip range: 1,5 - 3 mm
Hardness: SH 70
Insert: Wire

33.475



Edge trim: PVC + bi / sponge rubber
Grip range: 2 - 4 mm
Hardness: SH 78 / 57 / density 0,55
Insert: Steel

33.459C *



Edge trim: EPDM co-ex, solid lip
Grip range: 2 - 4 mm
Hardness: SH 60
Insert: 29 x 0,76 wire
Min. order: 6.000 m

33.382



Edge trim: EPDM co-ex, solid lip
Grip range: 1 - 3,5 mm
Hardness: SH 70
Insert: Steel

33.482



Edge trim: EPDM co-ex, solid lip
Grip range: 2 - 4,5 mm
Hardness: SH 70
Insert: 30 x 0,47 mm steel

33.483



Edge trim: EPDM co-ex, solid lip
Grip range: 1 - 2,5 mm
Hardness: SH 70
Insert: 30 x 0,47 mm steel

33.460-2C



Edge trim: EPDM co-ex
Grip range: 1 - 2,5 mm
Hardness: SH 70 / density 0,6
Insert: 31 x 0,5 mm steel unbroken

33.460-2F *



Edge trim: EPDM co-ex
Grip range: 1 - 2,5 mm
Hardness: SH 65 / density 0,6
Insert: 31 x 0,5 mm steel
Flame retardent NFF16-101
Min. order: 3.000 m

33.460-2



Edge trim: PVC+bi / sponge rubber
Grip range: 1 - 2,5 mm
Hardness: SH 78/57 / density 0,6
Insert: 31 x 0,5 mm steel

33.460-4



Edge trim: PVC+bi / sponge rubber
Grip range: 2 - 4 mm
Hardness: SH 78/57 / density 0,6
Insert: 31 x 0,5 mm steel

33.460-6



Edge trim: PVC+bi / sponge rubber
Grip range: 4 - 6 mm 25 m
Hardness: SH 78/57 / density 0,6
Insert: 31 x 0,5 mm steel

33.460-6A



Edge trim: PVC+bi / sponge rubber
Grip range: 4 - 6 mm 50 m
Hardness: SH 78/57 / density 0,6
Insert: 31 x 0,5 mm steel

33.472



Edge trim: EPDM solid lip
Grip range: 2 - 4 mm
Hardness: SH 70
Insert: 29 x 0,5 mm unbroken

33.471



Edge trim: EPDM solid lip
Grip range: 3 - 4 mm
Hardness: SH 60 solid lip
Insert: 29 x 0,76 mm wire

* **Skaffevare** / Special order item

33.443 *



Edge trim: EPDM co-ex
Grip range: 1 - 2 mm
Hardness: SH 70 / density 0,55
Insert: Wire
Min. order: 5.500 m

33.443X



Edge trim: EPDM co-ex
Grip range: 1 - 2 mm
Hardness: SH 60 / density 0,6
Insert: Wire

33.467



Edge trim: EPDM co-ex
Grip range: 1,5 - 3,5 mm
Hardness: SH 70 / density 0,65
Insert: 29 x 0,76 mm wire
Min. order: 6.000 m

33.383



Edge trim: EPDM co-ex
Grip range: 2 - 4 mm
Hardness: SH 70 / density 0,6
Insert: 30 x 0,5 steel

33.385 *



Edge trim: EPDM co-ex
Grip range: 1 - 2,5 mm
Hardness: SH 70 / density 0,55
Insert: 26 x 0,5 steel unbroken
Min. order: 5.000 m

33.466 *



Edge trim: EPDM solid lip
Grip range: 1 - 2,5 mm
Hardness: SH 60
Insert: 26 x 0,76 mm wire
Min. order: 6.000 m

33.474



Edge trim: EPDM co-ex
Grip range: 2 - 5 mm
Hardness: SH 70 / density 0,6 - 0,85
Insert: 27 mm steel

33.384 *



Edge trim: EPDM co-ex
Grip range: 1,25 - 2 mm
Hardness: SH 75 / density 0,6
Insert: 29 x 0,5 mm steel broken
Min. order: 5.000 m

33.439A



Edge trim: PVC+bi / sponge rubber
Grip range: 1 - 4 mm
Hardness: SH 78/57 / density 0,6
Insert: 26 x 0,5 mm steel
Yellow lips

33.026



Edge trim: EPDM co-ex
Grip range: 1,5 - 2 mm (1 - 3,5 mm)
Hardness: SH 70 / density 0,55
Insert: 26 x 0,76 mm wire

33.436



Edge trim: EPDM co-ex
Grip range: 2 - 4 mm
Hardness: SH 70 / density 0,6
Insert: 33 mm wire

33.442



Edge trim: EPDM co-ex
Grip range: 1 - 3 mm
Hardness: SH 70 / density 0,65
Insert: 29 mm steel

33.473



Edge trim: EPDM co-ex
Grip range: 2 - 5 mm
Hardness: SH 70
Insert: 27 x 0,47 mm steel

33.462 *



Edge trim: PVC / sponge rubber
Grip range: 1 - 2,5 mm
Hardness: SH 78/density 0,65 - 0,75
Insert: 25 x 0,48 mm steel
Min. order: 1.000 m

33.462R



Edge trim: PVC / sponge rubber
Grip range: 1 - 2,5 mm
Hardness: SH 78/density 0,65 - 0,75
Insert: 25 x 0,48 mm
stainless steel

33.000



Nylon hjørnestykke
PA6 + 30% GF
Sikrer korrekt hjørneradius

* **Skaffevare** / Special order item

Silikonekantlister / Silicone edge trims

33.311



Edge trim: Black silicone
Grip range: 1 - 2 mm
Hardness: SH 60
Insert: Wire 18 x 0,76 mm
Heat resistant 200° C

33.510



Edge trim: Black silicone
Grip range: 1 - 3 mm
Hardness: SH 60
Insert: Wire 26 x 0,76 mm
Heat resistant 200° C

33.312



Edge trim: Silicone
Grip range: 2 - 4 mm
Hardness: SH 60
Insert: Wire
Heat resistant 200° C

33.429



Edge trim: Black silicone
Grip range: 3 - 6 mm (5 - 7 mm)
Hardness: SH 60
Insert: Wire 39 x 0,76 mm
Heat resistant 200° C

33.511



Edge trim: Silicone
Grip range: 1,5 - 4 mm
Hardness: SH 50
Insert: Wire
Heat resistant 200° C

33.512



Edge trim: Silicone
Grip range: 1 - 3,5 mm
Hardness: SH 50
Insert: Wire
Heat resistant 200° C

33.513



Edge trim: Silicone
Grip range: 1,5 - 3,5 mm
Hardness: SH 50
Insert: Wire
Heat resistant 200° C

33.431A



Edge trim: Silicone. Light gray RAL 7035
Grip range: 2 - 4 mm
Hardness: SH 60/60 Solid balloon
Insert: Wire
Heat resistant 200°C. FDA conform

33.514



Edge trim: Silicone
Grip range: 1,5 - 3 mm
Hardness: SH 75
Insert: Wire
Heat resistant 200° C

33.515



Edge trim: Silicone
Grip range: 1 - 2,5 mm
Hardness: SH 75
Insert: Wire
Heat resistant 200° C

33.516



Edge trim: Silicone
Grip range: 2 - 3 mm
Hardness: SH 75
Insert: Wire
Heat resistant 200° C

33.517



Edge trim: Silicone
Grip range: 2 - 3 mm
Hardness: SH 50
Insert: Wire
Heat resistant 200° C

33.518 *



Edge trim: White silicone
Grip range: 1,5 - 2,5 mm
Hardness: SH 60
Insert: Wire
Min. order: 500 m

33.519



Edge trim: Silicone
Grip range: 1 - 2 mm
Hardness: SH 45
Insert: Wire
Heat resistant 200° C

33.520 *



Edge trim: Silicone, co-ex.
Color: Black and redbrown
Grip range: 1,5 - 3 mm
Hardness: SH 60 / density 0,4
Insert: Wire
Min. order: 500 m

33.521



Edge trim: Silicone
Grip range: 1,5 - 4,5 mm
Hardness: SH 75
Insert: Wire
Heat resistant 200° C

* **Skaffevare** / Special order item

33.522 *



Edge trim: Silicone
Grip range: 1 - 2,5 mm
Insert: Wire
Heat resistant 200° C
Min. order: 2.000 m

33.523 *



Edge trim: Silicone
Grip range: 1,5 - 2,5 mm
Hardness: SH 60
Insert: Wire
Heat resistant 200° C
Min. order: 500 m

33.524



Edge trim: Silicone
Grip range: 2 - 4 mm
Hardness: SH 50
Insert: Wire
Heat resistant 200° C

33.525



Edge trim: Silicone
Grip range: 3 - 6 mm
Hardness: SH 50
Insert: Wire
Heat resistant 200° C

33.526 *



Edge trim: Silicone
Grip range: 1 - 2,5 mm
Hardness: SH 65
Insert: Wire
Heat resistant 200° C

33.527 *



Edge trim: Silicone
Grip range: 1 - 2,5 mm
Hardness: SH 65
Insert: Wire
Heat resistant 200° C

33.528 *



Edge trim: Silicone
Grip range: 1 - 3 mm
Hardness: SH 60
Insert: Wire
Heat resistant 200° C

33.529 *



Edge trim: Silicone
Grip range: 1 - 1,5 mm
Hardness: SH 80
Insert: Wire
Heat resistant 200° C
Min. order: 500 m

33.530 *



Edge trim: Silicone
Grip range: 3,5 - 5 mm
Hardness: SH 70
Insert: Wire
Heat resistant 200° C
DIN 5510-2 S4ST2

33.531 *



Edge trim: Silicone
Grip range: 2,5 - 5,5 mm
Hardness: SH 70
Insert: Wire
Heat resistant 200° C
Min. order: 500 m

33.532 *



Edge trim: Silicone
Grip range: 5,5 - 6,5 mm
Hardness: SH 65
Insert: Wire
Heat resistant 200° C

POM-profiler / POM edge trims

POM-profiler

- **En meget mere fleksibel opbygning med dets hukommelseseffekt**
- **POM-profiler vejer meget mindre end profiler med metal indlæg**
- **POM-profiler kan ikke ruste eller oxidere**
- **Fremstillingen af POM-profiler er meget nemmere end profiler med metal indlæg**
- **Større sikkerhed ved montering. Man undgår rifter fra skarpe metalstykker**
- **POM-indlæg er ikke ledende som metal og kan derfor anvendes til beskyttelse eller overflade materiale**

POM-profiles

- A much more flexible structure with its memory effect
- POM-supported profiles is much lighter than metal-based profiles
- Over time, no metallic corrosion and oxidize
- Processing of manufacturing for POM-backed profiles is much easier than metal-backed profiles
- During installation does not damage human health such as sinking or cutting
- POM is not conductive support material, such as metal supports therefore wherever used in protection and coating material

33.409POM



Edge trim: PVC + bi
Grip range: 0,5 - 2 mm
Hardness: SH 75 / 65
Insert: POM plastic
No rust. Easy cutting.

33.308POM



Edge trim: PVC + bi
Grip range: 2 - 4,5 mm
Hardness: SH 75 / 65
Insert: POM plastic
No rust. Easy cutting.

33.200POM



Edge trim: PVC + bi
Grip range: 1 - 4 mm
Hardness: SH 75 / 65
Insert: POM plastic
No rust. Easy cutting.

33.201POM



Edge trim: PVC + bi
Grip range: 2 - 4 mm
Hardness: SH 75 / 65
Insert: POM plastic
No rust. Easy cutting.

33.202POM



Edge trim: PVC + bi
Grip range: 4 - 6 mm
Hardness: SH 75 / 65
Insert: POM plastic
No rust. Easy cutting.

33.203POM



Edge trim: PVC + bi
Grip range: 6 - 8 mm
Hardness: SH 75 / 65
Insert: POM plastic
No rust. Easy cutting.

33.210POM



Edge trim: TPE co-ex
Grip range: 1 - 2 mm
Hardness: SH 75 / density 0,65
Insert: POM plastic
No rust. Easy cutting.

33.211POM



Edge trim: TPE co-ex
Grip range: 1 - 4 mm
Hardness: SH 75 / density 0,65
Insert: POM plastic
No rust easy cutting

33.212POM



Edge trim: TPE co-ex
Grip range: 2 - 4 mm
Hardness: SH 75 / density 0,65
Insert: POM plastic
No rust easy cutting

33.218POM



Edge trim: TPE co-ex
Grip range: 3 - 5 mm
Hardness: SH 75 / density 0,65
Insert: POM plastic
No rust easy cutting

33.216POM



Edge trim: TPE co-ex
Grip range: 1 - 4 mm
Hardness: SH 75 / density 0,65
Insert: POM plastic
No rust easy cutting

33.217POM



Edge trim: TPE co-ex
Grip range: 4 - 6 mm
Hardness: SH 75 / density 0,65
Insert: POM plastic
No rust easy cutting

33.213POM



Edge trim: TPE co-ex
Grip range: 1 - 2 mm
Hardness: SH 75 / density 0,65
Insert: POM plastic
No rust easy cutting

33.214POM



Edge trim: TPE co-ex
Grip range: 1 - 2 mm
Hardness: SH 75 / density 0,65
Insert: POM plastic
No rust easy cutting

33.215POM



Edge trim: TPE co-ex
Grip range: 1 - 2 mm
Hardness: SH 75 / density 0,65
Insert: POM plastic
No rust easy cutting

33.220POM



Edge trim: TPE
Grip range: 1 - 2 mm
Hardness: SH 75 / density 0,65
Insert: POM plastic
No rust easy cutting

33.221POM



Edge trim: TPE
Grip range: 2 - 4 mm
Hardness: SH 75 solid
Insert: POM plastic
No rust easy cutting

33.424 *



Edge trim: TPE + bi
Grip range: 0,8 - 2,5 mm
Hardness: SH 87 / 65 - 70
Insert: None
Alternative 33.424TPE

33.424TPE



Edge trim: TPE + bi
Grip range: 1 - 2 mm
Hardness: SH 90 / 50
Insert: None

33.417TPE



Edge trim: TPE + bi
Grip range: 1 - 4 mm
Hardness: SH 90 / 50
Insert: None

Gummisnor / Rubber cord profiles



Black EPDM
Shore A 65 - 70

Art	Ø mm
30.101 *	1
30.101.25 *	1,25
30.101.5	1.5
30.102	2
30.102E	2 (single cord)
30.103E *	3
30.104E *	4
30.104.5E	4,5
30.105E	5
30.106E	6
30.107E *	7
30.108E	8
30.109E	9
30.110E	10
30.112E *	12
30.113E	13
30.114E *	14
30.115E *	15
30.116E *	16
30.117E	17
30.118E	18
30.119E	19
30.120E	20
30.121E	21
30.122E	22
30.124E	24
30.125E *	25
30.135E	35 (SH 75)

Black CR
Shore A 60

Art	Ø mm
30.103CR *	3
30.103.5CR *	3,5
30.104CR *	4
30.104.5CR *	4,5
30.105CR *	5
30.105.3CR *	5,3
30.105.7CR *	5,7
30.106CR *	6
30.106.5CR *	6,5
30.107CR *	7
30.107.5CR *	7,5
30.108CR *	8
30.108.4CR *	8,4
30.109CR *	9
30.109.5CR *	9,5
30.110CR *	10
30.111CR *	11
30.112CR *	12
30.113CR *	13
30.114CR *	14
30.115CR *	15
30.116CR *	16
30.118CR	18
30.120CR *	20
30.122CR *	22
30.125CR *	25
30.130CR *	30
30.132CR *	32
30.140CR *	40

Black NBR
Shore A 65

Art	Ø mm
30.103NBR	3
30.103.5NBR *	3,5
30.104NBR *	4
30.104.5NBR *	4,5
30.105NBR	5
30.105.3NBR *	5,3
30.105.7NBR *	5,7
30.106NBR *	6
30.106.5NBR *	6,5
30.107NBR *	7
30.107.5NBR *	7,5
30.108NBR *	8
30.108.4NBR *	8,4
30.109NBR *	9
30.109.5NBR *	9,5
30.110NBR *	10
30.111NBR *	11
30.112NBR *	12
30.113NBR *	13
30.114NBR *	14
30.116NBR *	16
30.118NBR *	18
30.120NBR *	20
30.122NBR *	22
30.125NBR *	25
30.130NBR *	30
30.132NBR *	32
30.140NBR *	40

White SILICONE
Shore A 60

Art	Ø mm
30.103SIH *	3
30.104SIH *	4
30.106SIH *	6
30.108SIH	8

Elastiksnor / Rubber cord



Art.	Ø (mm)
50.260-4	4
50.260-5	5
50.260-6	6
50.260-8	8
50.260-10	10

* **Skaffevare** / Special order item



Material: EPDM

Art.	A (mm)	B (mm)	Hardness	Min. order (m)	Adhesive
30.29168	12	1	SH 65	2.000	X
30.A018615	18,6	1,5	SH 65		
30.601 *	65	2,5	SH 65	500	
30.600	30	3	SH 65		
30.602	50	3	SH 65		
30.12932-3 *	50	4	SH 60	600	
30.A02005	20	5	SH 65		
30.A02505	25	5	SH 65		
30.A03305	33	5	SH 65		
30.A05005	50	5	SH 65		
30.A06705	67	5	SH 65		
30.A07505	75	5	SH 65		
30.A10005	100	5	SH 65		
30.23464	150	5	SH 65		X
30.A03006	30	6	SH 65		
30.A05808	58	8	SH 65		
30.12932-4 *	23	10	SH 60	500	
30.A03310	33	10	SH 65		
30.A05010	50	10	SH 65		
30.A06710	67	10	SH 65		
30.A10010	100	10	SH 65		

Other sizes can be obtained on request.

30.262S



Material: EPDM black
Hardness: SH 65 - 75

30.WI660



L-profil
Internal: 35 x 40 x 5 mm
External: 40 x 45 x 5 mm

30.WI747



Material: EPDM
Hardness: SH 60

30.9691-2 *



Material: White EPDM
Min. order: 504 m

30.7367



Material: CR black
Hardness: SH 65
Conditional oil resistant

30.9691-5 *



Material: White EPDM
Hardness: SH 65
Min. order: 504 m

30.7696



Material: CR black
Hardness: SH 65
Conditional oil resistant

30.12759



Material: Black EPDM
Hardness: SH 60A

30.OT1024 / 30.OT1024B



Material: Silicone with adhesive
Hardness: SH 60
30.OT1024 white
30.OT1024B black
30.OT1024KPC transparent

30.216S



Material: EPDM black
Hardness: SH 65

30.218S



Material: EPDM black
Hardness: SH 75 - 81

30.220L



Material: CR black
Hardness: SH 65
Length: 6,5 m
Conditional oil resistant

* **Skaffevare** / Special order item

Specialprofiler / Special profiles

30.331



Material: EPDM black
Hardness: SH 70

30.9996-10



Material: EPDM
Hardness: SH 70

41.675A - 41.674A



Material: Aluminium
41.675A: 5,2 m, untreated
41.674A: 5 m, anodized

39.1208P



Fender profile with channel
Material: PE
Length: 3 m

30.12957-1



Material: EPDM
Hardness: SH 65

30.7933



H-profile for aluminium rail
Material: EPDM
Hardness: SH 70

30.12957-2



Material: EPDM
Hardness: SH 65

30.7932



Rubber profile for alu. track
Material: EPDM
Hardness: SH 70

30.7935



Material: EPDM black
Hardness: SH 65
Length: 2,8 m
Min. order: 120 m

30.7853X



Material: Black EPDM

30.7652



Rubber profile
Material: EPDM
Hardness: SH 65

30.333



L-profile
Material: EPDM
Hardware: SH 70
Roll of 50 m

41.333S



Steel profile for mounting of rubber profile 30.333
Length: 2,6 m

30.8469 *



Rubber profile with drip cap
For loading tail board
Material: EPDM
Hardness: SH 67
Length: 8 m
Min. order: 80 m

41.678



Alu c-profil 42 x 10 mm
Length 5,2 m
Fits to 30.8469

* **Skaffevare** / Special order item

30.325X



Material: EPDM black
Hardness: SH 65
Length: 5 m

30.324S



Material: EPDM black
Hardness: SH 65
Length: 5 m

30.324SB



Material: EPDM black
Hardness: SH 45 (soft)
Length: 5 m

30.7649-8 *



D-weatherstrip
Material: EPDM Black
Hardness: SH 60
Min. order: 1.000 m

30.7649



D-weatherstrip
Material: EPDM Black
Hardness: SH 60

30.7649-12 *



D-weatherstrip
Material: EPDM Black
Hardness: SH 60
Min. order: 1.000 m

30.12957-3



Material: EPDM
Hardness: SH 60

30.14098-2



Material: EPDM
Hardness: SH 60A

30.9691-3



Material: Black EPDM
Hardness: SH 65

30.7650



D-weatherstrip
Material: EPDM
Hardness: SH 70

30.5881



Material: CR black
Hardness: SH 65
Conditional oil resistant

30.2151 *



Skirt profile
Hardness: PVC white
Roll of 14 m
Min. order: 560 m

30.6648



Skirt profile
Hardness: SH 75
30.6648: Black EPDM
30.6648G: Grey TPE
30.6648S: Black TPE

30.2151S *



Material: Black PVC
Hardness: SH 75 - 80
Min. order: 280 m

30.2566



Skirt profile
Material: PVC black
Hardness: SH 80
Height: 125 mm
Length: 1 m
Roll of 64 m

* **Skaffevare** / Special order item

30.257S



Material: EPDM black
Hardness: SH 65

30.258 *



Material: EPDM black

30.5560 *



Material: EPDM black
Hardness: SH 65
Min. order: 450 m

30.7780/4



Material: EPDM black
Hardness: SH 65
Length: 4 m

30.7300 - 30.7300/4



Material: EPDM black
Hardness: SH 65
Length 30.7300: 3 m
Lenght 30.7300/4: 4 m

30.7300/4Y *



Material: EPDM yellow
Hardness: SH 65
Min. order: 64 m

30.6944 *



Material: EPDM black
Hardness: SH 65
Min. order: 200 m

30.5550M



Material: EPDM black
Hardness: SH 65

30.2653 *



Material: EPDM black
Hardness: SH 65
Min. order: 1.000 m

30.5981



Material: EPDM black
Hardness: SH 65

30.8199



Material: EPDM black
Hardness: SH 65
Length: 4 m

30.8199W



Material: EPDM white
Hardness: SH 65
Length: 4 m
Min. order: 223 m

30.6759



Material: EPDM black
Hardness: SH 65

30.7770 *



Material: EPDM black
Hardness: SH 65
Min. order: 100 m

* **Skaffevare** / Special order item

30.314S



Rubber profile
Material: EPDM
Hardness: SH 60 / 65

30.7651



Balloon profile
Material: EPDM
Hardness: SH 65

30.313



Co-ex profile
Material: EPDM / sponge rubber
Hardness: SH 80

30.7648



Material: EPDM black
Hardness: SH 65

30.7106 *



Material: SBR black
Hardness: SH 65
Min. order: 1.000 m

30.315S



Material: EPDM black
Hardness: SH 65
Length: 10 m
OBS does not fit 41.675A

30.315SB



Material: EPDM black
Hardness: SH 45
Length: 10 m
OBS does not fit 41.675A

30.7613 *



Material: EPDM black
Hardness: SH 60
Min. order: 500 m

30.50967 *



Material: NBR black
Hardness: SH 65
Min. order: 500 m
Oil resistant

30.13841



Material: Black NBR
Hardness: SH 45A
Oil resistant

30.14053



Material: Black NBR
Hardness: SH 50A
Oil resistant

30.OT3354



Material: Silicone white
Hardness: SH 60

30.7645 *



Material: EPDM black
Hardness: SH 45
Min. order: 50 m

30.13421



Material: EPDM
Hardness: SH 65

30.7559



Material: NBR black
Hardness: SH 60
Oil resistant

* **Skaffevare** / Special order item

30.14130



Co-ex profile
Material: EPDM
Hardness: SH 70 / density 85-95

30.190



Material: PVC
Hardness: SH 57

30.8270



Material: EPDM black
Hardness: SH 57

30.OT1387 *



Material: Silicone grey
Hardness: SH 60
Min. order: 40 m

30.OT3272 *



Material: Silicone blue
Hardness: SH 60
Min. order: 50 m

32.8518



End-stop profile
Material: EPDM
Hardness: SH 65
Roll of 50 m

32.8518W *



Color: White, RAL 9003
Material: EPDM
Hardness: SH 60
Min. order: 1.500 m

32.8516



End-stop profile
Material: EPDM
Hardness: SH 65
Roll of 50 m

32.8517



End-stop profile
Material: EPDM
Hardness: SH 65
Roll of 50 m

32.8520



Univarsal end-stop profile
Material: EPDM
Hardness: SH 65
Roll of 50 m

31.369



End-stop profile
Material: EPDM black
Hardness: SH 65

32.8519



End-stop profile
Material: EPDM
Hardness: SH 65
Roll of 50 m

30.12553-2



Material: Black EPDM
Hardness: SH 60A

* **Skaffevare** / Special order item

30.798



Material: EPDM black
Hardness: SH 65

30.14163-1



Material: EPDM
Hardness: SH 65

30.144



Material: EPDM black
Hardness: SH 60

30.5179



Material: EPDM

30.141



Material: EPDM
Hardness: SH 60

30.142S



Material: EPDM black
Hardness: SH 65

30.14163



Material: EPDM
Hardness: SH 65

30.8331



Material: EPDM black
Hardness: SH 65

30.145W *



Material: EPDM white
Hardness: SH 65
Min. order: 300 m

30.145 *



Material: EPDM black
Hardness: SH 70
Min. order: 200 m

30.13447-8 *



Container profile
Material: EPDM
Hardness: SH 70
Length: 2,5 m
Min. order: 500 m

54.710290 *



Material: EPDM black
Hardness: SH 65
Length: 10 m
Min. order: 10 m

30.7663



Material: EPDM black
Hardness: SH 65
Length: 5 m

30.340



Material: EPDM black
Hardness: SH 50
Length: 3 m

30.2438



Material: EPDM black
Hardness: SH 65
Length: 2,2 m

30.4437 *



Material: Black EPDM
Hardness: SH 60
Min. order: 85 m

* **Skaffevare** / Special order item

Specialprofiler / Special profiles

30.7411



Material: EPDM black
Hardness: SH 65
Grip range: 1 - 1,5 mm

30.13062 *



Material: EPDM
Hardness: SH 65
Min. order: 500 m

34.7528-2H *



Material: PVC white
Min. order: 250 m

34.7528-2



Material: PVC grey

34.3546



Material: White PVC

30.762



Material: EPDM black
Hardness: SH 65

31.072



Material: EPDM black
Hardness: SH 65

30.7266 *



Material: EPDM black
Hardness: SH 65
Min. order: 50 m

30.12932-2 *



Material: Black EPDM
Hardness: SH 60
Min. order: 400 m

30.29300-130 *



Material: CR black
Hardness: SH 65
Min. order: 100 m
Conditional oil resistant

30.29300-129 *



Material: Black CR
Hardness: SH 65
Min. order: 300 m
Conditional oil resistant

30.16688



Material: EPDM
Hardness: SH 70

30.7811 *



Material: EPDM black
Hardness: SH 60
Min. order: 1.500 m

30.11905



Material: Black silicone
Hardness: SH 50

30.7249 *



Material: CR black
Hardness: SH 70
Min. order: 500 m
Conditional oil resistant

* **Skaffevare** / Special order item

30.13049-4



Material: Black EPDM
Hardness: SH 60A

30.13049-2 *



Material: EPDM
Hardness: SH 60A
Min. order: 5.000 m

30.13049-1 *



Material: EPDM
Hardness: SH 60A
Min. order: 4.000 m

30.13049-5 *



Material: Black EPDM
Hardness: SH 60A
Min. order: 2.000 m

30.4469



Material: EPDM
Hardness: SH 60
Coated with silicone

30.10485



Material: EPDM
Coated with silicone

30.9387-2 *



Material: EPDM
Min. order: 5.000 m
With internal cord

30.13796 *



Material: Black EPDM
Hardness: SH 75A
Min. order: 1.000 m

30.OT1092 *



Material: Silicone white
Min. order: 300 m

31.702 *



Material: EPDM black
Hardness: SH 70
Conditional oil resistant
Min. order: 2.000 m

30.7507 *



Material: EPDM black
Hardness: SH 65
Min. order: 1.000 m

30.10461-2



Material: EPDM with cord

30.7845 *



Material: SBR black
Hardness: SH 70
Min. order: 51 m

30.16977



Material: White PVC hard
with adhesive

30.5596 *



Material: EPDM black
Hardness: SH 65
Min. order: 500 m

52.PP106



Material: NR / SBR
Cable transmission. Roll 9 m

* **Skaffevare** / Special order item

Specialprofiler / Special profiles

30.13503



Material: Black EPDM
Hardness: SH 60A
For track 41.13459

41.13459



Aluprofile for gate
Anodized surface. Length 6 m.
Calculated weight 479 g/m.
For profile: 30.13503

41.13459X *



1/2 aluprofile for gate21.5 x 40 mm
Anodized surface. Length 6 m.
Calculated weight: 239 g/m
For profile: 30.13503

30.9215



Material: EPDM
Hardness: SH 65 - 70

30.9826-1



Material: EPDM
Hardness: SH 70

30.9826-2



Material: EPDM
Hardness: SH 70

30.10036



Material: EPDM
Hardness: SH 70

30.9996-6



Material: EPDM
Hardness: SH 60

30.13242



Material: Co-ex EPDM
Hardness: SH 85 / 62
Length: 3.000 mm
(Rail see 41.670)

41.670



Elexeret alu.
3 m med montagehuller.
Ø4 hver 200 mm.
Til profil 30.13242

30.16239



Material: EPDM
Hardness: SH 70

30.9996-5



Material: EPDM
Hardness: SH 70

30.9387-1



Material: EPDM
Hardness: SH 70
With cord

30.9996-4



Material: EPDM
Hardness: SH 70

* **Skaffevare** / Special order item

30.9437-100



Ventilation ring
Material: Black EPDM
Hardness: SH 60 - 65

30.9437-125



Ventilation ring
Material: Black EPDM
Hardness: SH 60 - 65

30.9437-160



Ventilation ring
Material: Black EPDM
Hardness: SH 60 - 65

30.9437-200



Ventilation ring
Material: Black EPDM
Hardness: SH 60 - 65

30.9437-250



Ventilation ring
Material: Black EPDM
Hardness: SH 60 - 65

30.9437-315



Ventilation ring
Material: Black EPDM
Hardness: SH 60 - 65

30.9437-400



Ventilation ring
Material: Black EPDM
Hardness: SH 60 - 65

30.9437-500



Ventilation ring
Material: Black EPDM
Hardness: SH 60 - 65

45.205S / 45.205SX



Material: Silver grey PVC

45.209BX



Material: Black PVC

45.210B / 45.210BX



Material: White PVC

45.210C / 45.210CX



Material: Off white PVC

45.208



Material: Blue PVC

Co-ekstruderede plastprofiler / Co-extruded plastic profiles

50.083013 *



Material: PVC co-ex profile 13 mm
Black / white
Length: 5 m
With 4 soft lips
Min. order: 200 pcs

50.083015GG / 50.083015GGX



Material: PVC co-ex profile 15 mm
Light grey / grey lips
Length: 5 m
With 4 soft lips
50.083015GGX: 4 m light/light

50.083030



Material: PVC co-ex profile 18 mm
Black / white
Length: 5 m
With 4 soft lips

50.083032GG *



Material: PVC co-ex profile 18,4 mm. Grey / grey (other colors possible)
Length: 6 m
With 4 soft lips
Min. order: 500 m

50.083033



Material: PVC co-ex profile 19 mm
Black lips / light grey
Length: 5 m
With 4 soft lips

50.083040GS



Material: PVC co-ex profile 21 mm
Black / grey
Length: 6 m
With 4 soft lips

50.083040



Material: PVC co-ex profile 21 mm
Black / white
Length: 5 m
With 4 soft lips
Min. order: 200 pcs.

50.083040G



Material: PVC co-ex profile 21 mm
Grey / grey
Length: 5 m
With 4 soft lips

50.083033X



Material: PVC co-ex profile 20 mm
Black lips / light grey
Length: 5 m
With 4 soft lips

50.083040GG *



Material: PVC co-ex profile 20,8 mm. Grey / grey (other colors possible)
Length: 6 m
With 4 soft lips

50.083045X *



Material: PVC co-ex profile 25 mm (different colors possible)
Length: 5 m
With 3 soft lips
Min. order: 250 m (China)

54.710720 *



Material: PVC co-ex profile 25 mm
Hardness: Hard/soft
Length: 3 m
With 4 soft lips
Min. order: 25 pcs.

50.083045G *



Material: PVC co-ex profile 25 mm
Different colors possible
Length : 6 m
With 4 soft lips
Min. order: 500 m

50.083050GG *



Material: PVC co-ex profile 30 mm
Grey / grey
(other colors possible)
Length: 5 m
With 2 soft lips
Min. order: 500 m

50.083050



Material: PVC co-ex profile 30 mm
Black / white
Length: 5 m
With 2 soft lips

50.083050G



Material: PVC co-ex profile 30 mm
Black / light grey
Length: 5 m
With 2 soft lips

* **Skaffevare** / Special order item

50.083052G *



Material: PVC co-ex profile 35 mm
Grey / grey
(other colors possible)
Length: 3 m
With 4 soft lips
Min. order: 300 m

50.083055G



Material: PVC co-ex profile 35 mm. Light grey / grey lips
Length: 5 m
With 4 soft lips

50.083059 *



Material: PVC co-ex profile 40 mm
White / black lips
Length: 5 m
With 2 soft lips
Min. order: 250 m

50.083060 *



Material: PVC co-ex profile 40 mm
White / black lips
(other colors pos.)
Length: 5 m
With 4 soft lips
Min. order: 500 m

50.083060G



Material: PVC co-ex profile 40 mm. Light grey / grey lips
Length: 5 m
With 2 soft lips

50.083061 *



Material: PVC co-ex profile 42 mm
White / black lips
Length: 5 m
With 4 soft lips
Min. order: 250 m (China)

50.083065 *



Material: PVC co-ex profile 45 mm
Grey / grey
(other colors possibel)
Length: 5 m
With 3 soft lips
Min. order: 250 m

50.083065G *



Material: Co-ex profile
Length: 5 m

50.083070G



Material: PVC co-ex profile
55 mm
Light grey / grey lips
Length: 5 m
With 4 soft lips

50.083070B *



Material: PVC co-ex profile 55 mm. White / black lips
Length: 5 m
Min. order: 500 m
With 4 soft lips

54.710770 *



Material: Grey PVC co-ex profile 30 mm
Length: 3 m
Min. order: 50 m
With 4 soft lips

50.083081 *



Material: Black PVC co-ex profile 65 mm
With 5 soft lips
Min. order: 250 m

50.083080GG *



Material: PVC co-ex profile 65 mm
Light grey / light grey lips
Length: 5 m
With 3 soft lips
Min. order: 250 m (China)

50.083080G



Material: PVC co-ex profile 65 mm. Grey / grey lips
Length: 5 m
With 2 soft lips

50.083088 *



Material: PVC co-ex profile 81 mm. Black
With 5 soft lips
Min. order: 250 m

50.083089 *



Material: PVC co-ex profile 81 mm. Black
With 5 soft lips
Min. order: 250 m

* **Skaffevare** / Special order item

Co-ekstruderede plastprofiler / Co-extruded plastic profiles

50.083090



Material: PVC co-ex profile 83 mm. Light grey / light grey
Length: 5 m
With 4 soft lips

50.083095B *



Material: PVC co-ex profile 84 mm. White / black lips.
Length: 5 m
Min. order: 500 m
With 4 soft lips

50.083095 / 50.083095G *



Material: PVC co-ex profile 85 mm. White / black lips.
Length: 5 m
With 4 soft lips
50.083095G: Min order: 250 m.

54.710780 *



Material: PVC co-ex profile 85 mm
Black / grey
Hardness: Hard / soft
Length: 3 m
With 4 soft lips
Min. order: 50 pcs.

50.083000GG



Grå hjørnebånd
Grey connection part. Soft PVC.
In running meters

50.083000SS



Sort hjørnebånd
Black connection part. Soft PVC.
In running meters

* **Skaffevare** / Special order item

31.018S *



Material: Black EPDM
Hardness: SH 65
Min. order: 4.100 m

31.018X



Material: PVC black
Hardness: SH 65

34.018 / 34.018X



Material: Light grey PVC
Hardness: Soft

34.14334X



Material: Black PVC
Plade: 1,5 - 2 mm

31.060S



Material: EPDM black
Hardness: SH 65

31.041S



Material: EPDM black
Hardness: SH 65

31.042S



Material: EPDM black
Hardness: SH 65

30.OT3394 *



Material: Silicone black
Min. order: 100 m

31.047 *



Material: EPDM black
Hardness: SH 65
Min. order: 1.000 m

31.063



Material: EPDM black
Hardness: SH 65

30.9548



Material: Light grey hard PVC
Length: 3,9 m

31.025S



Material: EPDM black
Hardness: SH 65

31.021S



Material: EPDM black
Hardness: SH 65

31.022S



Material: EPDM black
Hardness: SH 65

34.031 / 34.031X



Material: PVC transparent
Hardness: Soft

30.13086



Material: EPDM black
Hardness: SH 80

* **Skaffevare** / Special order item

U-profiler / U-profiles

31.043S



Material: EPDM black
Hardness: SH 65

31.064



Material: EPDM black
Hardness: Hard

31.065S



Material: EPDM black
Hardness: SH 65

31.061S



Material: EPDM black
Hardness: SH 65

30.6622N



Material: NBR black
Hardness: SH 65
Oil resistant

30.6622 *



Material: EPDM black
Hardness: SH 65
Min. order: 500 m

31.216ST



Material: EPDM black
Hardness: SH 65

31.216GS



Material: Silicone light grey Ral 7040
Hardness: SH 70

30.11459 *



Material: Silicone transparent
Hardness: SH 45
Min. order: 250 m

34.035



Material: PVC transparent
Hardness: Hard

31.066



Material: Silicone black
Hardness: SH 70

30.6724



Material: EPDM black
Hardness: SH 65

30.14507-1 *



Material: EPDM black
Min. order: 3.000 m

30.14507-2 *



Material: EPDM black
Min. order: 3.000 m

31.068S



Material: EPDM black
Hardness: SH 65

30.1386



Material: EPDM black
Hardness: SH 65

* **Skaffevare** / Special order item

30.OT3440 *



Material: Silicone black
Hardness: SH 60
Min. order: 100 m

30.12896



Material: EPDM black
Hardness: SH 65

31.074S *



Material: EPDM black
Min. order: 1.000 m

30.7987



Material: EPDM black
Hardness: SH 65

30.OT0136 *



Material: White silicone
Min. order: 100 m

31.070S



Material: EPDM black
Hardness: SH 50

31.071S



Material: EPDM black
Hardness: SH 65

30.2449



Material: Black PVC
Length: 1.415 mm

30.2455



Material: Black PVC
Length: 3.111 mm

30.11774



Material: EPDM
Hardness: SH 65

30.7508 *



Material: EPDM black
Hardness: SH 65
Min. order: 400 m

30.9519



Material: Black soft PVC

30.12932-1 *



Material: Black EPDM
Hardness: SH 60A
Min. order: 500 m

30.13535 *



Material: EPDM black
Hardness: SH 60
Min. order: 420 m

30.7509



Material: EPDM black
Hardness: SH 65

30.10777-1 *



Material: TPE black
Hardness: SH 60
Min. order: 100 m

* **Skaffevare** / Special order item

U-profiler / U-profiles

30.21101205



Material: EPDM
Hardness: SH 70

30.14507-3 *



Material: EPDM
Min. order: 2.000 m

31.050



Material: EPDM black
Hardness: SH 65

30.14356



Material: Black TPE
Hardness: SH 60

31.048 *



Material: EPDM black
Hardness: SH 65
Min. order: 250 m

30.11911 *



Material: EPDM
Hardness: SH 65
Min. order: 120 m

30.2984-5



U-profile
Material: EPDM
Hardness: SH 70

34.117/6



Material: Metal grey plastic

30.2984-6



U-profile
Material: EPDM
Hardness: SH 80
Roll of 50 m

30.2984-1



U-profile
Material: EPDM
Hardness: SH 70
Roll of 25 m

30.2984-2



U-profile
Material: EPDM
Hardness: SH 65
Roll of 25 m

30.2984-3



U-profile
Material: EPDM
Hardness: SH 70
Roll of 25 m

30.7519NBR *



Material: NBR grey
Hardness: SH 65
Length: 3 m
Min. order: 500 m
Oil resistant

30.7519 *



Material: EPDM black
Hardness: SH 65
Length: 50 m coils
Min. order: 50 m

30.14227 *



Material: Transperent silicone
Min. order: 100 m

* **Skaffevare** / Special order item

31.037SI



Material: Black silicone

31.035S



Material: EPDM black
Hardness: SH 65

31.036SI *



Material: Silicone black
Min. order: 200 m

31.036SI-LTC *



Material: Silicone black
UL94 approved
Min. order: 1.000 m

30.9884X *



Material: EPDM
Min. order: 3.000 m

31.037 *



Material: EPDM
Hardness: SH 56 - 60A
Min. order: 2.000 m

30.9885



Material: EPDM
Hardness: SH 60

31.038SI



Material: Silicone black
Hardness: SH 60

* **Skaffevare** / Special order item

P-profiler / P-profiles

30.136



Material: EPDM black
Hardness: SH 65

30.136NBR



Material: EPDM black
Hardness: SH 65
Oil resistant

30.136/45



Material: EPDM black
Hardness: SH 45 soft

30.OT1057 *



Material: Silicone white
Maks. 270°
Min. order: 50 m

30.182 *



Material: Grey silicone
RAL 7040
Min. order: 100 m

30.22381



Material: CR black
Hardness: SH 70
Conditional oil resistant

30.148S *



Material: EPDM black
Hardness: SH 65
Min. order: 450 m

30.7408X



Material: Black EPDM

30.OT2036



Material: Silicone black
Maks. 270°

30.140



Material: EPDM

30.138S



Material: EPDM black
Hardness: SH 65

30.138NBR *



Material: NBR
Oil resistant
Min. order: 500 m

30.OT101 *



Material: Silicone brown
Min. order: 100 m

52.269 / 52.269X



Material: PVC black
Hardness: Medium

30.174S



Material: EPDM black
Hardness: SH 65

30.176 *



Material: EPDM black
Hardness: SH 65
Min. order: 1.000 m

* **Skaffevare** / Special order item

30.180



Material: EPDM black
Hardness: SH 65

30.8538



Material: EPDM co-ex
Hardness: SH 65 / density 0,70

30.8538B



Material: EPDM co-ex
Hardness: SH 65 / density 0,5
Min. order: 2.000 m

30.OT3271 *



Material: Silicone light grey
Min. order: 500 m

30.6487 *



Material: PVC grey
Length: 3 m
Min. order: 1.000 m

30.SM251 *



Material: TPE / EPDM grey
Hardness: SH 65
Length: 25 M
Min. order: 200 m

30.OT1081



Material: Silicone white

30.OT3334



Material: Silicone white

31.OT2179 *



Material: Silicone white
Min. order: 100 m

Rudeprofiler / Glazing sections

32.016S



Material: EPDM black
Hardness: SH 65
Min. radius: 90 mm

32.924



Material: EPDM black
Hardness: SH 65
Min. radius: 30 mm
Incl. wedge

32.2024CR *



Material: CR black
Hardness: SH 65
Min. radius: 80 mm
Min. order: 200 m
Oil resistant

32.1024S



Material: EPDM black
Hardness: SH 65
Min. radius: 80 mm

32.1025S



Material: EPDM black
Hardness: SH 65
Min. radius: 80 mm

32.2024M



Material: EPDM black
Hardness: SH 65
Min. radius: 80 mm

32.1025SK



Material: EPDM black
Hardness: SH 65
Min. radius: 80 mm
Incl. wedge

32.034S



Material: EPDM black
Hardness: SH 65
Min. radius: 90 mm

32.036S



Material: EPDM black
Hardness: SH 65
Min. radius: 75 mm

32.1045SK *



Material: EPDM black
Hardness: SH 65
Min. radius: 80 mm
Incl. wedge
Min. order: 100 m

32.044S



Material: EPDM black
Hardness: SH 65
Min. radius: 75 mm

32.046S



Material: EPDM black
Hardness: SH 65
Min. radius: 90 mm

32.2045M



Material: EPDM black
Hardness: SH 65
Min. radius: 90 mm

30.8439



Material: EPDM
Hardness: SH 65

32.036X



Material: EPDM
Hardness: SH 65

32.047



Material: EPDM black
Hardness: SH 65
Min. radius: 90 mm

* **Skaffevare** / Special order item

32.1045S



Material: EPDM black
Hardness: SH 65
Min. radius: 90 mm

32.057 *



Material: EPDM black
Hardness: SH 65
Min. radius: 100 mm
Min. 300 m

32.255S



Material: EPDM black
Hardness: SH 65
Min. radius: 100 mm

32.064S



Material: EPDM black
Hardness: SH 70

32.066



Material: EPDM black
Hardness: SH 65
Min. radius: 80 mm

32.075



Material: EPDM black
Hardness: SH 65
Min. radius: 100 mm

32.095S



Material: EPDM black
Hardness: SH 65
Min. radius: 115 mm

32.512



Material: EPDM black
Hardness: SH 65
Min. radius: 115 mm

32.165



Material: EPDM black
Hardness: SH 65
Min. radius: 120 mm

32.514S



Material: EPDM black
Hardness: SH 65
Min. radius: 110 mm

32.516S



Material: EPDM black
Hardness: SH 65
Min. radius: 120 mm

32.523S



Material: EPDM black
Hardness: SH 65
Min. radius: 110 mm

32.527



Material: EPDM black
Hardness: SH 65
Min. radius: 120 mm

32.1037S



Material: EPDM black
Hardness: SH 65
Min. radius: 120 mm

32.1640



Material: EPDM black
Hardness: SH 65
Min. radius: 120 mm

32.754S



Material: EPDM black
Hardness: SH 65
Min. radius: 100 mm
Safety

* **Skaffevare** / Special order item

Rudeprofiler / Glazing sections

32.866 *



Material: EPDM black
Hardness: SH 65
Min. radius: 120 mm
Safety
Min. order: 250 m

32.795S



Material: EPDM black
Hardness: SH 65
Min. radius: 100 mm
Safety

32.7125 *



Material: EPDM black
Hardness: SH 65
Min. radius: 120 mm
Safety
Min. order: 250 m

32.7195S



Material: EPDM black
Hardness: SH 65
Min. radius: 120 mm
Safety

31.365



Material: EPDM black
Hardness: SH 65

31.116S



Material: EPDM black
Hardness: SH 65

31.112S



Material: EPDM black
Hardness: SH 65

31.145S



Material: EPDM black
Hardness: SH 65

31.148



Material: EPDM black
Hardness: SH 65

31.155



Material: EPDM black
Hardness: SH 65

31.6701



Material: EPDM black
Hardness: SH 65

31.6703 *



Material: EPDM black
Hardness: SH 65
Min. order: 1.000 m

31.6702 *



Material: EPDM black
Hardness: SH 65
Min. order: 500 m

* **Skaffevare** / Special order item

32.309X



Material: PVC black

32.301 / 32.301X



Material: PVC silver

32.300X



Material: PVC white

32.1301



Material: PVC chrome

32.409 / 32.409X



Material: PVC black

32.009S



Material: EPDM black
Hardness: SH 65

32.010



Material: EPDM black
Hardness: SH 65

32.924K



Material: EPDM black
For 32.924

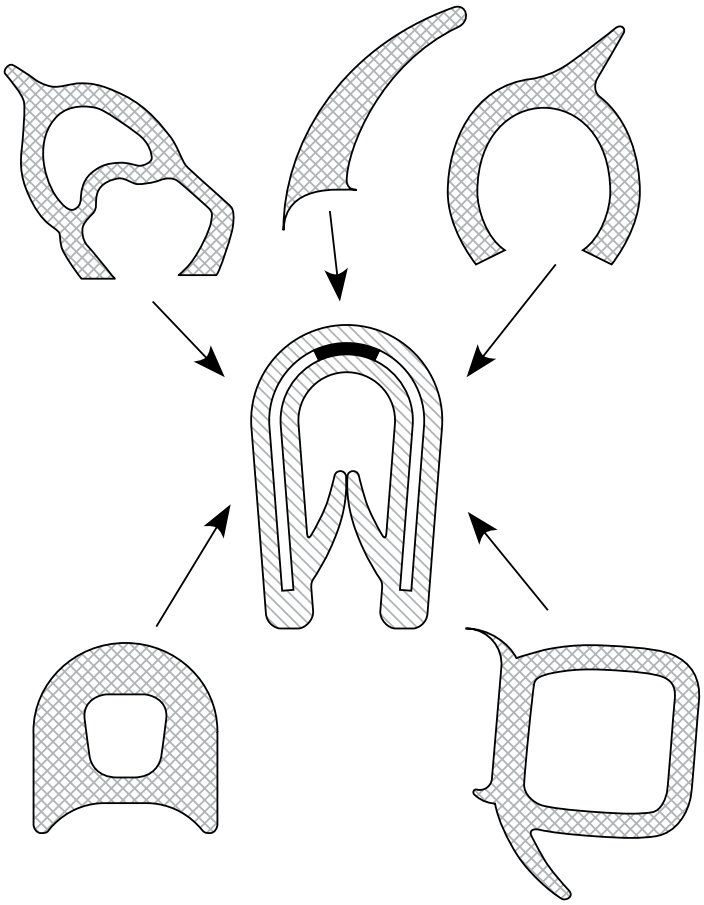

Edge trims

Configure your own edge trim or choose from the 2.000 different we have in stock.

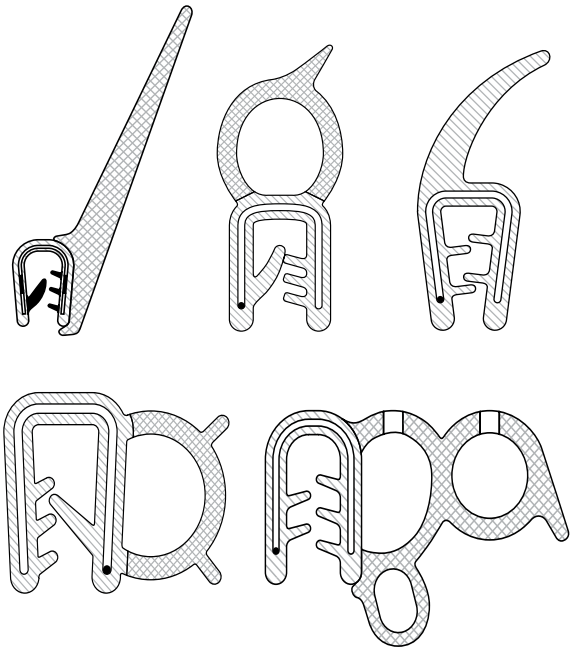

Svampegummi / Sponge rubber



Material: Black EPDM
Hardness: SH 16 - 20 density 0,45 - 0,6

Art.	Ø (mm)
36.7003 *	3
36.7004	4
36.7005	5
36.7006 *	6
36.7008	8
36.7009	9
36.7010	10
36.7012	12
36.7015	15
36.7050 *	50

Material: Dark grey CR
Hardness: SH 16 - 22 density 0,4 - 0,6

Art.	Ø (mm)
36.103CR	3
36.104CR	4
36.105CR	5
36.106CR	6
36.107CR	7
36.108CR *	8
36.110CR *	10
36.112CR *	12
36.115CR	15 (black)
36.118CR	18 (black)
36.119CR *	19
36.120CR *	20
36.122CR	22

Material: Dark grey NR
Hardness: SH 16 - 22 density 0,4 - 0,55

Art.	Ø (mm)
36.102 *	2
36.102.5 *	2,5
36.103 *	3
36.104 *	4
36.106 *	6
36.108	8
36.110 *	10
36.112	12
36.115 *	15
36.120 *	20
36.125 *	25
36.130 *	30

Material: Dark grey EPDM
Hardness: SH 16 - 20 density 0,4 - 0,5

Art.	Ø (mm)
36.102E	2
36.1025E *	2,5
36.103E	3
36.1035E	3,5
36.1045E *	4,5
36.105E *	5
36.106E	6
36.106EG * (Light grey)	6
36.106ESP	6
36.107E	7
36.108E *	8
36.108EG * (Light grey)	8
36.109E *	9
36.110E *	10
36.111E *	11
36.112E	12
36.112EG * (Light grey)	12
36.117E	17
36.120E	20
36.122E *	22
36.125E	25
36.130EX	30
36.135E	35

Material: Black EPDM
Hardness: SH 16 - 20 density 0,45 - 0,6

Art.	Ø (mm)	Min. order
36.7004.5X	4,5	3.000
36.7005X	5	3.000
36.7006X	6	3.000
36.7007X	7	3.000
36.7008X	8	3.000
36.7008.5X	8,5	3.000
36.7009X	9	3.000
36.7010X	10	3.000
36.7010.5X	10,5	3.000
36.7011X	11	3.000
36.7011.5X	11,5	3.000
36.7012X	12	3.000
36.7014X	14	3.000
36.7018X	18	
36.7028X	28	
36.7064X	64	



Material: Black EPDM

Art.	A x B (mm)	Min. length (m)
36.3416068 *	16 x 6,8	
36.34155105 *	15,5 x 10,5	
36.344511 *	45 x 11	
36.341840 *	40 x 18	200
36.342026 *	26 x 20	1.000
36.342030	30 x 20	Stock goods
36.342226 *	26 x 22	1.000
36.342232 *	32 x 22	500
36.342433 *	33 x 24	500
36.342529 *	29 x 25	1.000
36.342840 *	40 x 28	250

* **Skaffevare** / Special order item



Material: NR
Hardness: SH 16 - 20
density 0,45 - 0,6

Art.	A x B (mm)	Color
36.197	4 x 6	Blue grey
36.198A *	6 x 8	Blue grey

Material: CR
Hardness: SH 16 - 20
density 0,4

Art.	A x B (mm)	Color
36.198CR *	6 x 8	Dark grey
36.200	8 x 8	Dark grey
36.202	10 x 12	Dark grey

Material: EPDM

Art.	A x B (mm)	Color
36.198	6 x 8	Grey
36.198S	6 x 8	Black
36.199	6 x 10	Light grey
36.208	10 x 20	Light grey
36.3314	12 x 17	Dark grey



Material: Dark grey, EPDM
Hardness: SH 14 - 16
density 0,38 - 0,42

Art.	A x B (mm)	Varenr.	A x B (mm)	Art.	A x B (mm)	Art.	A x B (mm)
35.0806 *	8 x 6	**35.1605**	16 x 5	**35.2515**	25 x 15	**35.4010**	40 x 10
35.1003 *	10 x 3	**35.1608** *	16 x 8	**35.2520**	25 x 20	**35.4020**	40 x 20
35.1004 *	10 x 4	**35.18053**	18 x 5,3	**35.2525**	25 x 25	**35.4030** *	40 x 30
35.1005	10 x 5	**35.2003**	20 x 3	**35.3005**	30 x 5	**35.4035** *	40 x 35
35.1007 *	10 x 7	**35.2005**	20 x 5	**35.3007**	30 x 7	**35.4040**	40 x 40
35.1008	10 x 8	**35.20055** *	20 x 5,5	**35.3010**	30 x 10	**35.4505** *	45 x 5
35.1010	10 x 10	**35.2010**	20 x 10	**35.3012** *	30 x 12	**35.5005** *	50 x 5
35.1203 *	12 x 3	**35.2012** *	20 x 12	**35.3015**	30 x 15	**35.5006** *	50 x 6
35.1209 *	12 x 9	**35.2015**	20 x 15	**35.3020**	30 x 20	**35.5010** *	50 x 10
35.1212	12 x 12	**35.2018** *	20 x 18	**35.3025**	30 x 25	**35.5010E**	50 x 10
35.1503 *	15 x 3	**35.2020**	20 x 20	**35.3030**	30 x 30	**35.6010** *	60 x 10
35.1507	15 x 7	**35.2502**	25 x 2	**35.3505**	35 x 5	**35.6040** *	60 x 40
35.1510	15 x 10	**35.2505**	25 x 5	**35.3510** *	35 x 10		
35.1512 *	15 x 12	**35.2506** *	25 x 6	**35.3535**	35 x 35		
35.1515	15 x 15	**35.2510**	25 x 10	**35.4005**	40 x 5		



Material: Dark grey, EPDM, with adhesive
Hardness: SH 14 - 16
density 0,38 - 0,42

Art.	A x B (mm)	Varenr.	A x B (mm)	Art.	A x B (mm)	Art.	A x B (mm)
35.0806K *	8 x 6	**35.1507K** *	15 x 7	**35.2207K** *	22 x 7	**35.3505K** *	35 x 5
35.0808K *	8 x 8	**35.1510K**	15 x 10	**35.2505K**	25 x 5	**35.3510K** *	35 x 10
35.1003K	10 x 3	**35.1512K** *	15 x 12	**35.2506K** *	25 x 6	**35.3535K** *	35 x 35
35.1004K *	10 x 4	**35.1515K**	15 x 15	**35.2508K** *	25 x 8	**35.4003K**	40 x 3
35.1005K	10 x 5	**35.1605K** *	16 x 5	**35.2510K**	25 x 10	**35.4005K**	40 x 5
35.1007K *	10 x 7	**35.1608K** *	16 x 8	**35.2515K**	25 x 15	**35.4010K**	40 x 10
35.1008K	10 x 8	**35.1708K** *	17 x 8	**35.2520K**	25 x 20	**35.4012K** *	40 x 12
35.1010K	10 x 10	**35.1803K** *	18 x 3	**35.2525K**	25 x 25	**35.4020K** *	40 x 20
35.1203K *	12 x 3	**35.18053K** *	18 x 5,3	**35.2806K**	28 x 6	**35.4030K**	40 x 30
35.1204K *	12 x 4	**35.1809K** *	18 x 9	**35.3003K**	30 x 3	**35.4035K**	40 x 35
35.1204KL	12 x 4	**35.1904K** *	19 x 4	**35.3005K**	30 x 5	**35.4040K**	40 x 40
35.1206K *	12 x 6	**35.2003K**	20 x 3	**35.3006K**	30 x 6	**35.4505K** *	45 x 5
35.1208K *	12 x 8	**35.2005K**	20 x 5	**35.3007K** *	30 x 7	**35.5006K**	50 x 6
35.1209K *	12 x 9	**35.20055K** *	20 x 5,5	**35.3010K**	30 x 10	**35.5010K**	50 x 10
35.1212K	12 x 12	**35.2010K** *	20 x 10	**35.3012K**	30 x 12	**35.5020K** *	50 x 20
35.1503K *	15 x 3	**35.2010KL**	20 x 10	**35.3015K**	30 x 15	**35.6002K**	60 x 2
35.1504K	15 x 4	**35.2012K**	20 x 12	**35.3020K**	30 x 20	**35.8020K** *	80 x 20
35.1505K	15 x 5	**35.2015K**	20 x 15	**35.3025K** *	30 x 25	**35.10020K** *	100 x 20
35.1506K	15 x 6	**35.2020K**	20 x 20	**35.3030K**	30 x 30		

* **Skaffevare** / Special order item

Svampegummi / Sponge rubber



Material: White silicone
Hardness: SH 16 - 20
density 0,4 - 0,5

Art.	A x B (mm)	Art.	A x B (mm)	Art.	A x B (mm)
36.1003SIH *	10 x 3	**36.1812SIH** *	18 x 12	**36.2515SIH** *	25 x 15
36.1006SIH *	10 x 6	**36.2003SIH** *	20 x 3	**36.2520SIH**	25 x 20
36.1010SIH *	10 x 10	**36.2005SIH**	20 x 5	**36.2525SIH**	25 x 25
36.1212SIH	12 x 12	**36.2010SIH** *	20 x 10	**36.3010SIH** *	30 x 10
36.1505SIH	15 x 5	**36.2010SIHK** * (with adhesive)	20 x 10	**36.3020SIH** *	30 x 20
36.1512SIH	15 x 12	**36.2015SIH**	20 x 15	**36.4012SIH** *	40 x 12
36.1610SIH *	16 x 10	**36.2020SIH** *	20 x 20	**36.5005SIH** *	50 x 5
36.1616SIH	16 x 16	**36.2510SIH**	25 x 10		

Material: Black silicone
Hardness: SH 16 - 20
density 0,4 - 0,5

Art.	A x B (mm)
36.2010SIS *	20 x 10
36.2520SIS *	25 x 20



Material: Dark grey, EPDM
Hardness: SH 16 - 20
density 0,4 - 0,5

Art.	A x B (mm)	Art.	A x B (mm)	Art.	A x B (mm)
36.1010E (black)	10 x 10	**36.2010E**	20 x 10	**36.4015E**	40 x 15
36.1210E *	12 x 10	**36.2510E**	25 x 10	**36.4020E**	40 x 20
36.1503E *	15 x 3	**36.2520E** *	25 x 20	**36.4025E** *	40 x 25
36.1505E	15 x 5	**36.2525E** *	25 x 25	**36.4030E**	40 x 30
36.1510E	15 x 10	**36.3010E**	30 x 10	**36.5020E** *	50 x 20
36.1512E	15 x 12	**36.3025E**	30 x 25	**36.6030E** *	60 x 30
36.1612E *	16 x 12	**36.3520E**	35 x 20		
36.1815EG (light grey)	18 x 15	**36.4010E**	40 x 10		



Material: Dark grey, NR
Hardness: SH 16 - 20
density 0,4 - 0,5

Art.	A x B (mm)	Art.	A x B (mm)	Art.	A x B (mm)
36.0505 *	5 x 5	**36.1605** *	16 x 5	**36.3005**	30 x 5
36.0806 *	8 x 6	**36.1808G**	18 x 8	**36.3010**	30 x 10
36.1003	10 x 3	**36.1816** *	18 x 16	**36.3015**	30 x 15
36.1005	10 x 5	**36.2002** *	20 x 2	**36.3020**	30 x 20
36.1005G (light grey) *	10 x 5	**36.2003** *	20 x 3	**36.3030**	30 x 30
36.1007 *	10 x 7	**36.2005**	20 x 5	**36.3516** *	35 x 16
36.1008 *	10 x 8	**36.2010**	20 x 10	**36.4010**	40 x 10
36.1010 (black)	10 x 10	**36.2015**	20 x 15	**36.4012** *	40 x 12
36.1205 *	12 x 5	**36.2020**	20 x 20	**36.4015** *	40 x 15
36.1206	12 x 6	**36.2503** *	25 x 3	**36.4025**	40 x 25
36.1210	12 x 10	**36.2505**	25 x 5	**36.5010** *	50 x 10
36.1503	15 x 3	**36.2510**	25 x 10	**36.5020**	50 x 20
36.1510	15 x 10	**36.2515**	25 x 15	**36.5025** *	50 x 25
36.1512 *	15 x 12	**36.2520** *	25 x 20	**36.5030**	50 x 30
36.1515	15 x 15	**36.2525**	25 x 25	**36.6030** *	60 x 30
36.1604 *	16 x 4	**36.3003** *	30 x 3		

* **Skaffevare** / Special order item



Material: Black, CR
Hardness: SH 18 - 25 density 0,5 - 0,75

Art.	A x B (mm)
36.1010CR *	10 x 10
36.2010CR *	20 x 10
36.2020CR *	20 x 20
36.3015CR	30 x 15
36.4020CR *	40 x 20
36.5005CR *	50 x 5



Material: NBR

Art.	A x B (mm)
36.6020NBR	60 x 20



Economy
Material: Black
Hardness: Density 0,45

Art.	A x B (mm)	Min. order (m)	
36.1005X	10 x 5		
36.1505X	15 x 5		
36.2005X	20 x 5		
36.2505X	25 x 5		
36.3005X	30 x 5		
36.1406X	14 x 6		
36.1007X	10 x 7		
36.1507X	15 x 7		
36.2507X	25 x 7		
36.2008X *	20 x 8	3.000	
36.2508X *	25 x 8	3.000	
36.1010X	10 x 10		
36.1210X	12 x 10		
36.2010X *	20 x 10	3.000	
36.4010X	40 x 10		
36.5010X	50 x 10		
36.12511X	12,5 x 11		
36.1212X	12 x 12		
36.1612X	16 x 12		
36.2318X	23 x 18		
36.3015X	30 x 15		
36.3515X	35 x 15		
36.4020X *	40 x 20	3.000	
36.3020X	30 x 20		Soft corners
36.3520X	35 x 20		Soft corners
36.7013X	70 x 13		Soft corners
36.2512X	25 x 12		Soft corners

Sponge rubber plates
Material: EPDM / NR
Color: Dark grey

Art.	Length (mm)	Thickness (mm)	Width (mm)	Quality
38.152EPDM	1.000	2	1.000	EPDM
38.153EPDM	1.000	3	1.000	EPDM
38.154EPDM	1.000	4	1.000	EPDM
38.155EPDM	1.000	5	1.000	EPDM
38.156EPDM	1.000	6	1.000	EPDM
38.158EPDM	1.000	8	1.000	EPDM
38.160EPDM	1.000	10	1.000	EPDM
38.162EPDM	1.000	12	1.000	EPDM
38.165EPDM	1.000	15	1.000	EPDM
38.170EPDM	1.000	20	1.000	EPDM
38.175EPDM	1.000	25	1.000	EPDM
38.180NR	1.000	30	1.000	NR

* **Skaffevare** / Special order item

Svampegummi / Sponge rubber

36.K608 *



Color: Black

36.K613 *



Color: Black

36.K616 *



Color: Black

36.K671 *



Color: Black

36.K675 *



Color: Black

36.K676 *



Color: Black

36.K677 *



Color: Black

36.K678 *



Color: Black

36.K679



Color: Black

36.K680 *



Color: Black

36.K681 *



Color: Black

36.K683 *



Color: Black

36.K695 *



Color: Black

36.K697 *



Color: Black

36.K698 *



Color: Black

36.K852 *



Color: Black

* **Skaffevare** / Special order item

36.K853 *



Color: Black

36.3351 *



Material: EPDM black
Hardness: SH 14 - 16
density 0,38 - 0,4
Min. order: 500 m

36.3354 *



Material: NR dark grey
Hardness: SH 16 - 20
density 0,4
Min. order: 500 m

36.3813



Material: EPDM dark grey
Hardness: SH 16 - 20
density 0,4 - 0,45

36.B380



Material: EPDM
Length: 3 m

36.3315



Material: EPDM black
Hardness: SH 18 - 20
density 0,45 - 0,55

36.3504



Material: EPDM dark grey
Hardness: SH 14 - 16
density 0,38 - 0,42

36.3881



Material: EPDM grey
Hardness: SH 16 - 20
density 0,4 - 0,5

36.14044 *



Material: EPDM
Min. order: 500 m

36.3704



Material: NR dark grey
Hardness: SH 20 - 25
density 0,55 - 0,65

30.13144



Material: EPDM
with adhesive

36.3897



Material: Light grey EPDM

30.13315 *



Hardness: Density 0,7
Min. order: 1.000 m
With adhesive

30.9884S *



Material: EPDM
Min. order: 3.000 m

* **Skaffevare** / Special order item

Svampegummi / Sponge rubber

36.9086S



Material: Black EPDM with adhesive

36.9088S



Material: Black EPDM with adhesive

36.90810



Material: Black EPDM with adhesive

36.92117



Material: Black EPDM with adhesive

36.730810



Material: EPDM
Density: 0,35 - 0,45
With adhesive

36.730906 - 36.730906H *



Material: White EPDM with adhesive
Density: 0,25 - 0,35

36.730907 - 36.730907G



Material: Black/grey EPDM with adhesive
Density: 0,25 - 0,35

36.731210 - 36.731210H



Material: EPDM with adhesive
Density: 0,25 - 0,35

36.731412D



Material: EPDM with adhesive
Density: 0,25 - 0,35

36.732115



Material: EPDM with adhesive
Density: 0,45 - 0,55

36.80955S



Material: Black EPDM with adhesive

36.730955



Material: Black EPDM with adhesive
Density: 0,25 - 0,35

36.730955G



Material: Light grey with adhesive
Density: 0,25 - 0,35

36.730955H



Material: White with adhesive
Density: 0,25 - 0,35

* **Skaffevare** / Special order item

36.721508



Material: Black EPDM
Density: 0,35 - 0,45
With adhesive

36.720802



Material: Black EPDM
Density: 0,35 - 0,45
With adhesive

36.720803



Material: Black EPDM
Density: 0,35 - 0,45
With adhesive

36.720904



Material: Black EPDM
Density: 0,35 - 0,45
With adhesive

36.720804



Material: Black EPDM
Density: 0,35 - 0,45
With adhesive

36.7213564



Material: Black EPDM
Density: 0,35 - 0,45
With adhesive

36.721503



Material: Black EPDM
Density: 0,35 - 0,45
With adhesive

36.720903



Material: Black EPDM
Density: 0,35 - 0,45
With adhesive

36.721202



Material: Black EPDM
Density: 0,35 - 0,45
With adhesive

36.721504



Material: Black EPDM
Density: 0,35 - 0,45
With adhesive

36.722004



Material: Black EPDM
Density: 0,35 - 0,45
With adhesive

36.721004



Material: Black EPDM
Density: 0,35 - 0,45
With adhesive

36.721006



Material: Black EPDM
Density: 0,35 - 0,45
With adhesive

36.721203



Material: Black EPDM
Density: 0,35 - 0,45
With adhesive

36.721005



Material: Black EPDM
Density: 0,35 - 0,45
With adhesive

36.721508B



Material: Black EPDM
Density: 0,25 - 0,35
With adhesive

Cellegummi / Cellular rubber



Material: Black EPDM, with adhesive
Hardness: SH 25 density 0,14

Art.	A x B (mm)	Art.	A x B (mm)	Art.	A x B (mm)	Art.	A x B (mm)
36.60403 *	4 x 3	**36.61005**	10 x 5	**36.61530** *	15 x 30	**36.63005**	30 x 5
36.60404 *	4 x 4	**36.61008**	10 x 8	**36.61603**	16 x 3	**36.63010**	30 x 10
36.60405	4 x 5	**36.61010**	10 x 10	**36.61710** *	17 x 10	**36.63012**	30 x 12
36.60503	5 x 3	**36.61203**	12 x 3	**36.61808**	18 x 8	**36.64003**	40 x 3
36.60505	5 x 5	**36.61204** *	12 x 4	**36.62002**	20 x 2	**36.64005** *	40 x 5
36.60605 *	6 x 5	**36.61205**	12 x 5	**36.62003**	20 x 3	**36.64010**	40 x 10
36.60802	8 x 2	**36.61310** *	13 x 10	**36.62004**	20 x 4	**36.64015**	40 x 15
36.60803	8 x 3	**36.61502** *	15 x 2	**36.62005**	20 x 5	**36.65003**	50 x 3
36.60804	8 x 4	**36.61503**	15 x 3	**36.62008**	20 x 8	**36.65010**	50 x 10
36.60805 *	8 x 5	**36.61505**	15 x 5	**36.62010**	20 x 10	**36.66004** *	60 x 4
36.60808	8 x 8	**36.61506**	15 x 6	**36.62305** *	23 x 5	**36.6600.4X**	60 x 4
36.61001	10 x 1	**36.61508**	15 x 8	**36.62502**	25 x 2	**36.67502** *	75 x 2
36.61002	10 x 2	**36.61510**	15 x 10	**36.62506**	25 x 6		
36.61003	10 x 3	**36.61512**	15 x 12	**36.62510**	25 x 10		
36.61004	10 x 4	**36.61518** *	15 x 18	**36.62525** *	25 x 25		



Material: CR, with standard adhesive. CR-5952 tape without glass-fiber
Hardness: SH 25 density 0,14

Art.	A x B (mm)	Art.	A x B (mm)	Art.	A x B (mm)
36.60802CR	8 x 2	**36.62004CR** *	20 x 4	**36.65005CR-5952** *	50 x 5
36.60804CR	8 x 4	**36.63005CR-5952** *	30 x 5	**36.65007CR** *	50 x 7
36.60808CR *	8 x 8	**36.63030CR**	30 x 30	**36.68005CR** *	80 x 5
36.61003CR *	10 x 3	**36.63204CR** *	32 x 4	**36.68005CR-5952** *	80 x 5
36.61010CR *	10 x 10	**36.64005CR** *	40 x 5		
36.61609CR *	16 x 9	**36.65005CR** *	50 x 5		

Cellular rubber plates no adhesive
Material: EPDM
Color: Black

Art.	Length (mm)	Thickness (mm)	Width (mm)	Quality
38.188 *	1.000	40	2.000	EPDM
38.189 *	1.000	50	2.000	EPDM

Cellular rubber plates with adhesive
Material: EPDM
Color: Black

Art.	Length (mm)	Thickness (mm)	Width (mm)	Quality
38.160E/K	1.000	10	2.000	EPDM
38.170E/K *	1.000	20	2.000	EPDM
38.175E/K *	1.000	25	2.000	EPDM

Cellular rubber plates
Material: CR
Color: Black

Art.	Length (mm)	Thickness (mm)	Width (mm)	Quality
38.190 *	1.000	10	1.400	CR
38.191 *	1.000	15	1.400	CR

* **Skaffevare** / Special order item

34.601 * / 34.601G *



Material: PVC black
Min. order: 5 m
34.601G * PVC grey
Min. order: 50-500m

34.602 * / 34.602G *



Material: PVC black
Min. order: 5 m
34.602G * PVC grey
Min. order: 50 m

34.603 / 34.603G



Material: PVC black
34.603G Grey

34.604 *



Material: PVC black
Min. order: 50 m

34.7102-50 *



Material: PVC black
Min. order: 5 m

34.614 *



Material: PVC black
Min. order: 50 m

34.62105 *



Material: EPDM black
Min. order: 5 m

34.3032 *



Material: PVC black
Min. order: 51 m

34.641 *



Material: PVC black
Min. order: 5 m

34.643 *



Material: PVC black
Min. order: 50 m

34.644 *



Material: PVC black
Min. order: 50 m

34.620010 *



Material: PVC black
Min. order: 5 m

34.620040



Material: PVC black
Min. order: 5 m

34.620210



Material: PVC black
Min. order: 5 m

34.613



Material: PVC black

34.7196 *



Material: PVC black
Min. order: 20 m

* **Skaffevare** / Special order item

34.7199 *



Material: PVC black
Min. order: 25 m

34.620140 *



Material: PVC black
Min. order: 5 m

34.3011



Material: PVC black

34.62110 *



Material: PVC black
Min. order: 5 m

34.62039 *



Material: PVC black
Min. order: 5 m

34.62040



Material: PVC black

34.620420 *



Material: PVC black
Min. order: 5 m

34.62041



Material: PVC black

34.624 *



Material: PVC black
Min. order: 50 m

34.625 *



Material: PVC black
Min. order: 5 m

34.626 *



Material: PVC black
Min. order: 5 m

34.636



Material: PVC black

34.637 *



Material: PVC black
Min. order: 20 m

34.3020



Material: PVC black

34.7514 *



Material: PVC black
Min. order: 5 m

34.62610S *



Material: PVC black
Min. order: 5 m

* **Skaffevare** / Special order item

34.62713H *



Material: PVC white
Min. order: 5 m

34.62713S *



Material: PVC black
Min. order: 5 m

34.677



Material: PVC white

34.678 *



Material: PVC white
Min. order: 5 m

34.676S *



Material: PVC black for 34.624 and 34.7106
Min. order: 300 m

34.608



Material: PVC black
Current stock avaliable

34.608X



Material: PVC black

34.609X



Material: PVC black

34.606 *



Material: PVC black
Min. order: 500 m

34.607 *



Material: PVC black
Min. order: 100 m

34.606X *



Material: PVC black
Min. order: 500 m

34.607X *



Material: PVC black
Min. order: 500 m

45.206AL



Material: PVC gutter with adhesive
Length: 2 m

45.224



Material: White PVC gutter with adhesive
Length: 25 m

45.217C *



Material: Chrome PVC with adhesive
Length: 5 m

45.221C *



Material: Chrome PVC with adhesive
Length: 5 m

45.347C *



Material: Chrome PVC with adhesive
Length: 5 m

45.884C *



Material: Chrome PVC with adhesive
Length: 5 m

45.383C *



Material: Chrome PVC with adhesive
Length: 5 m

45.388C *



Material: Chrome PVC with adhesive
Length: 5 m

45.705C *



Material: Chrome PVC with adhesive
Length: 5 m

45.832



Material: PVC with adhesive
Length: 25 m

45.836



Material: PVC with adhesive
Length: 25 m

45.837



Material: PVC with adhesive
Length: 25 m
Hardness: SH 74 - 76
Density: 1,32

45.839 *



Material: PVC with adhesive
Length: 25 m
Min. order: 300 m

45.872



Material: PVC with adhesive
Length: 25 m

45.874



Material: PVC with adhesive
Length: 25 m

45.882



Material: PVC with adhesive
Length: 50 m

* **Skaffevare** / Special order item

45.886 / 45.886G



Material: Black PVC with adhesive
Length: 25 m
45.886G: Grey

45.894 *



Material: PVC with adhesive
Length: 25 m
Min. order: 300 m

45.980A *



Material: Chrome PVC with adhesive
Length: 25 m
Min. order: 500 m

45.980K *



Material: PVC with adhesive
Length: 340 mm
Min. order: 1.400 pcs.
Example fix lengths

45.980S *



Length: 25 m
Min. order: 500 m

45.102G



Length: 25 m

45.308C / 45.308C-50 *



Material: Chrome PVC
Length: 5 m
45.308C-50 (50 m)
Min. order: 300 m

45.309C / 45.309C-50 *



Material: Chrome PVC
Length: 5 m
45.309C-50 (50 m)
Min. order: 300 m

45.216C-50 *



Material: Chrome PVC
Length: 50 m
Min. order: 300 m

*

*

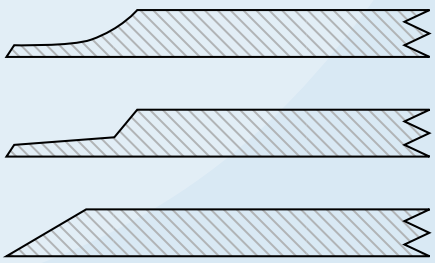

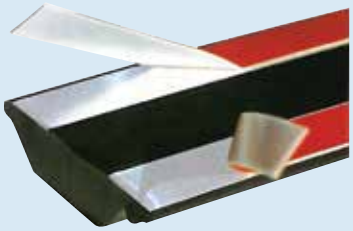

45.123 *



Material: PVC gutter with adhesive
Length: 25 m
Min. order: 300 m

45.393 *



Material: PVC gutter with adhesive
Length: 25 m
Min. order: 300 m

45.394 *



Material: PVC gutter with adhesive
Length: 25 m
Min. order: 300 m

45.901 *



Material: PVC gutter with adhesive
Length: 25 m
Min. order: 300 m

45.2031024 *



PVC universal wheel arch panel with adhesive. Set of 4 pcs.
Length: 1,5 m

45.20511046 *



PVC universal wheel arch panel with adhesive. Coil.
Color: Black
Length: 6 m

45.20511091 *



PVC universal wheel arch panel with adhesive. Set of 2 pcs.
Length: 1,5 m

45.2051445 *



PVC universal wheel arch panel with adhesive. Coil.
Length: 12,5 m

45.235N1057 *



PVC universal wheel arch panel with adhesive. Coil.
Color: Black
Length: 6 m

45.235N429 *



PVC universal wheel arch panel with adhesive. Coil.
Color: Black
Length: 12,5 m

45.235NG1057 *



PVC universal wheel arch panel with adhesive. Coil.
Color: Grey / black
Length: 6 m

45.235NG429 *



PVC universal wheel arch panel with adhesive. Coil.
Color: Grey / black
Length: 12,5 m

31.4281



Material: EPDM black
Hardness: SH 85
Length: 2,7 m

* **Skaffevare** / Special order item

39.171J / 39.171G



Material: Black
39.171G: Light grey

39.175J



Material: Black NR
Hardness: 78

39.175H *



Min. order: 2.000 pcs.

39.632J



Material: Black

39.167G



Grey rubber buffer

39.168G



Grey rubber buffer

39.169G



Grey rubber buffer

39.170G



Grey rubber buffer

39.174



Material: Black NR / SBR

39.177



Material: Black NR / SBR

39.178



Material: Black NR / SBR

39.179



Material: Black NR / SBR

39.632A



Material: Black NR / SBR

39.632B



Material: Black NR / SBR

39.632C



Material: Black NR / SBR

39.172



Material: Black NR / SBR

* **Skaffevare** / Special order item

Gummibuffer / Rubber buffer

39.173



Material: Black NR / SBR

39.626J



Material: Black NR
Hardness: SH 85

39.637



Vehicle bumper
Material: Black NR / SBR

39.625



Material: NR / SBR

39.624



Material: Black NR / SBR

39.623J



Rubber buffer, slightly conical
Material: NR

39.620J



Rubber buffer with washers
Material: Black NR
Hardness: SH 85

39.638



Vehicle bumper
Material: Black NR / SBR

39.181061



Material: NR/SBR

39.181052



Material: NR/SBR

39.627



Material: SBR black

39.181060



Material: NR/SBR

39.360



Material: Black NR / SBR

39.628



Material: NR/SBR

39.646



Material: Black NR / SBR
Weight: 1.800 g

39.629



Material: Black NR / SBR

39.634



Buffer with steel washers and steel casing, 3 holes for 16 mm bolt.
Material: EPDM black

39.630



Material: Black NR / SBR

39.634P



Material: Black NR / SBR

39.647 *



Material: Black NR / SBR

39.650 *



Material: Black NR / SBR

39.631X



Material: SBR black
Hardness: SH 75

39.651A



Material: NR / SBR
39.651: SBR + rayon

39.652



Material: Black NR / SBR

39.653



Material: Black NR / SBR

39.644



Material: SBR + rayon
39.644A: NR/SBR *

39.631A



Material: NR / SBR

39.648



Material: Black NR / SBR

39.649



Material: Black NR / SBR

39.642X



Material: NR / SBR
(Economy)
39.642 SBR + rayon *

39.643X



Material: NR / SBR
(Economy)

39.M24



M24 washer for rubber buffer

* **Skaffevare** / Special order item

Gummibuffer / Rubber buffer

39.636H



Buffer, vulcanized new rubber with vulcanized steel washer.

39.635X



Buffer, vulcanized new rubber with vulcanized steel washers.

39.635



Buffer, vulcanized new rubber with vulcanized steel washers.

39.636X



Buffer, vulcanized new rubber with vulcanized steel washers.

39.636



Buffer, vulcanized new rubber with vulcanized steel washers.

39.181061



Weight: 1.050 g

39.181052



Weight: 1.370 g

39.181060



Weight: 1.370 g

Anslagsbuffere / tipper pads *
Material: Steel / rubber

Art.	Size steel element (mm)	Size rubber element (mm)	Weight (kg)
39.658	150 x 40 x 5	100 x 40 x 25	0,34
39.656	152 x 88 x 6	100 x 86 x 22	0,75
39.657	355 x 75 x 3	290 x 74 x 27	1,35

Anslagsbuffere / tipper pads *
Material: Aluminium / rubber

Art.	Size aluminium element (mm)	Size rubber element (mm)	Weight (kg)
39.659	152 x 88 x 5	100 x 86 x 23	0,41
39.661	180 x 75 x 5	115 x 75 x 29	0,41
39.660	152 x 88 x 5	100 x 88 x 38	0,6
39.662	180 x 75 x 5	150 x 75 x 40	0,6
39.663	180 x 75 x 4	115 x 75 x 46	0,6
39.664	190 x 115 x 6	120 x 112 x 14 - 20	0,6
39.665	355 x 75 x 5	290 x 75 x 39	1,4

39.180



Material: SBR black
Hardness: SH 80
Rubber pad Ø120 for lift stabilizers. Internal Ø108 mm. Height 26 mm.

39.181 *

Material: SBR black
Hardness: SH 75
Rubber pad Ø120 fir lift stabilizers. Internal Ø108 mm.
Height 26 mm.

39.182 *

Material: SBR black
Hardness: SH 75
Rubber pad Ø145 for lift stabilizers. Internal Ø120 mm
Height 24 mm.

39.183

Material: TPE black
Hardness: SH 80
Rubber pad Ø145 for lift stabilizers. Internal height 26 mm.

39.188 *

Rubber pad for lift stabilizers
Material: Black SBR
Hardness: SH 75
Size: Ø 160 x H 28 mm
Internal Ø 135 mm

39.183A *

Rubber pad for lift stabilizers
Material: Black SBR
Hardness: SH 80
Size: Ø 100 x H 21 mm
Internal Ø 80 mm

39.183B *

Rubber pad for lift stabilizers
Material: Black SBR
Hardness: SH 80
Size: Ø 140 x H 25 mm
Internal Ø 103 mm

39.183C *

Rubber pad for lift stabilizers
Material: Black
Hardness: SH 80
Size: Ø 140 x H 25 mm
Internal Ø 74 / 60 mm

30.9906



Hardness: SH 80

52.CWC8



Chocks

39.184

Rubber pad for lift stabilizers
Material: SBR black
Hardness: SH 75
160 x 120 x 20 mm

39.186

Rubber pad for lift stabilizers
Material: SBR black
Hardness: SH 75
160 x 120 x 120 mm

39.187

Rubber pad for lift stabilizers
Material: SBR black
Hardness: SH 75
180 x 60 x 100 mm

39.185

Rubber pad for lift stabilizers
Material: SBR black
Hardness: SH 75
160 x 120 x 35 mm

* **Skaffevare** / Special order item

Gummibuffer / Rubber buffer

Art.	Image	Measure
30.13186-1		
30.13186-2		
30.13186-3		
30.13186-4		
30.13186-5 *		
30.13186-6 *		
30.13186-7 *		
30.13186-8 *		

Material: Grey PVC

39.645

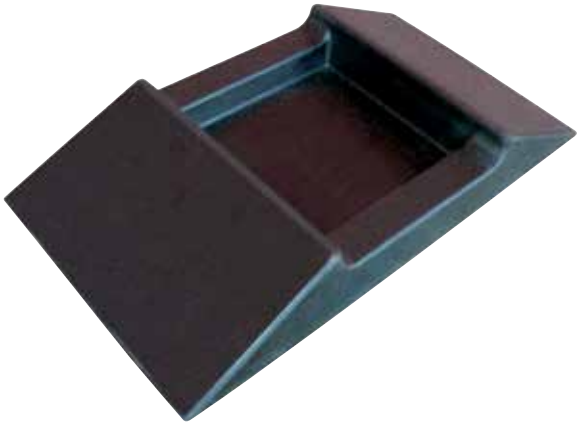

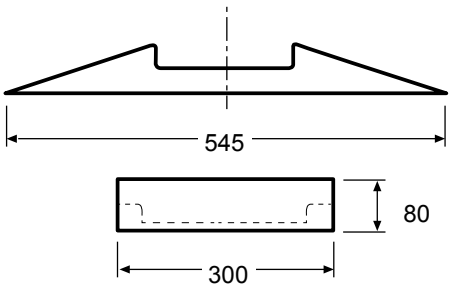

* **Skaffevare** / Special order item

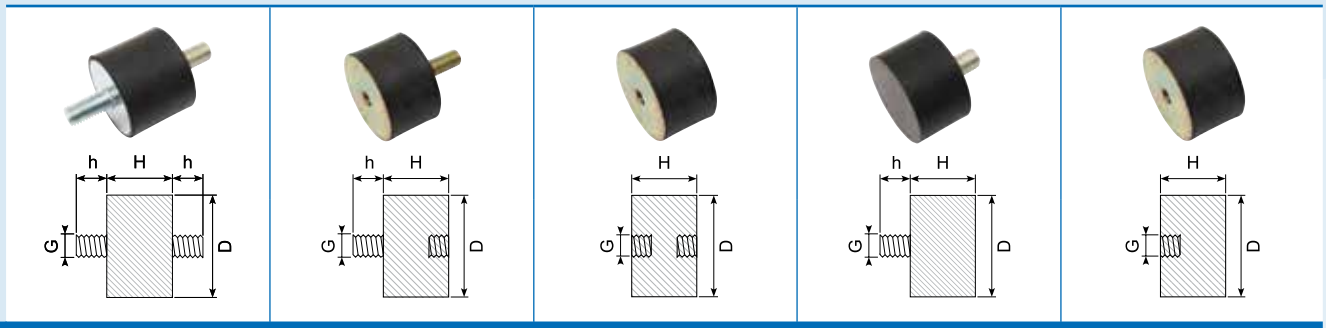

D	H	Type M (1)	Type B (2)	Type C (3)	Type D (4)	Type E (5)
6	7					
8	5					
8	8					
8	10					
9	12					
10	8					
10	10				39.D10/10	
10	15					
10	17					
10	18					
10	30					
11	11					
12	10					
13	26					
15	4					
15	5					
15	6					
15	7					
15	8					
15	9					
15	10				39.D15/10 (M5x15)	
					39.D15/10-M6 (M6x18)	
15	12					
15	13					
15	15				39.D15/15 (M5x15)	
					39.D15/15-M6 (M6x15)	
15	20					
15	25					
15	30					
16	18		39.B16/18			
18	10	39.M1810				
20	5					
20	8					
20	10	39.M20/10-M6 (M6x18)	39.B20/10-M6 (M6x18)	39.C20/10 (M4)		39.E20/10-M6 (M6)
		39.M20/10 (M8x18)	39.B20/10 (M8x18)			39.E20/10 (M8)
20	11					
20	12					
20	13					
20	15	39.M2015	39.B20/15 (M8x18)		39.D20/15E	
20	17					
20	20	39.M2020	39.B2020	39.C20/20	39.D20/20 (M5x15)	
		39.M2020-M8			39.D20/20-M6 (M6x18)	
20	23					
20	25					
20	30					
25	8					
25	10			39.C25/10 (M4)		39.E25/10-M6 (M6)
						39.E25/10 (M8)
25	12					
25	13		39.B2513			
25	14					

G	h
M6	6, 8, 10, 12, 15, 18, 20, 23, 28
M8	8, 10, 12, 15, 18, 20, 23, 25, 28, 33

G	h
M10	10, 12, 15, 18, 20, 23, 25, 28 ,33, 38, 43
M12	10, 12, 18, 20, 23, 25, 27, 33, 37, 42

Fåes i tre hårdheder: Shore 43, 55 og 68.
Også mulighed for rustfri gevind.
Available in three hardnesses: SH 43, 55 and 68.
Also option for stainless threads.

Vibrationsdæmpere / Vibration muffler











D	H	Type M (1)	Type B (2)	Type C (3)	Type D (4)	Type E (5)
25	15	39.M2515		39.C25/15		
25	17					
25	18					
25	19					
25	20	39.M2520				
		39.M2520-M6				
25	22					
25	25		39.B25/25 (M8x18)			
			39.B25/25-M6 (M6x18)	39.C25/25-M6		
25	27					
25	28					
25	30					
26	22					
30	8					
30	10	39.M30/10 (M8x23)			39.D30/10	
					39.D30/10-M6 (M6x18)	
30	12					
30	13					
30	15	39.M3015-M8x12			39.D30/15	39.E30/15-M6 (M6)
		39.M3015-M8x15			39.D30/15-M6 (M6x18)	39.E30/15 (M8)
30	17					
30	18					
30	20	39.M3020	39.B30/20	39.C30/20 (M8)	39.D30/20	39.E30/20-M6 (M6)
		39.M3020-55	39.B30/20X		39.D30/20-M6	39.E30/20 (M8)
30	22					
30	25					
30	30	39.M3030	39.B30/30	39.C30/30	39.D30/30	39.E30/30-M6 (M6)
		39.M3030-SS	39.B30/30-M6		39.D30/30-M6 (M6x18)	39.E30/30 (M8)
30	35					39.E30/35
30	40					
30	45					
40	10					
40	15				39.D40/15	39.E40/15-SH43
					39.D40/15-M6 (M6x18)	
40	20	39.M40/20 (M8x23)	39.B40/20 (M8x23)		39.D40/20 (M8x18)	39.E40/20-M6 (M6)
					39.D40/20-M6 (M6x18)	39.E40/20 (M8)
					39.D40/20-M10 (M10x20)	
					39.D40/20-A2	
40	25	39.4025		39.C40/25 (M8)	39.D40/25-A2	
40	27					
40	28					
40	30	39.M4030	39.B40/30 (M8x23)	39.C40/30	39.D40/30-A2	39.E40/30 (M8)
					39.D40/30	
					39.D40/30-M8 (M8x18)	
40	35		39.B40/35 (M8x23)		39.D40/35-A2	
					39.D40/35 (M10x20)	
40	38	39.M4038		39.C40/40 (M8)		
40	40	39.M40/40 (M10x28)		39.C40/40-M10 (M10)	39.D40/40-A2	
					39.D40/40 (M10x20)	
40	45				39.D40/45-A2	
40	60					

G	h
M6	6, 8, 10, 12, 15, 18, 20, 23, 28
M8	8, 10, 12, 15, 18, 20, 23, 25, 28, 33

G	h
M10	10, 12, 15, 18, 20, 23, 25, 28 ,33, 38, 43
M12	10, 12, 18, 20, 23, 25, 27, 33, 37, 42

Fåes i tre hårdheder: Shore 43, 55 og 68.
Også mulighed for rustfri gevind.
Available in three hardnesses: SH 43, 55 and 68.
Also option for stainless threads.

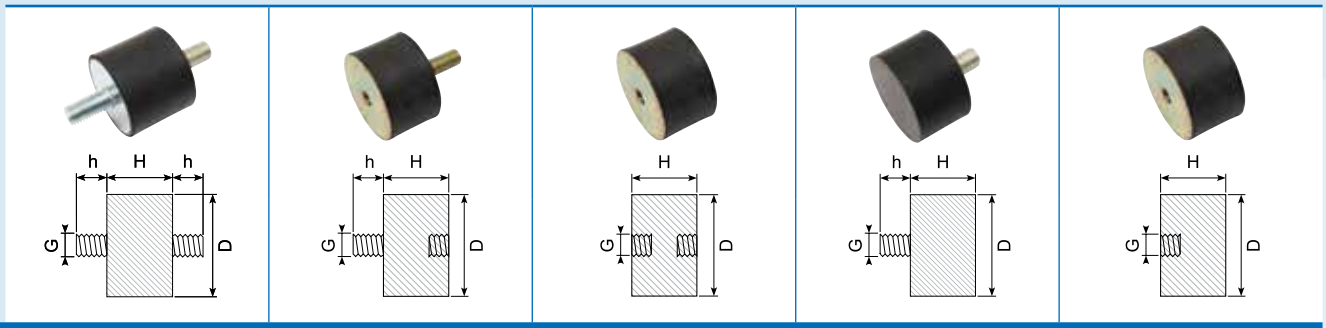

D	H	Type M (1)	Type B (2)	Type C (3)	Type D (4)	Type E (5)
50	7					
50	9					
50	12					
50	15					
50	17					
50	20			39.C50/20 (M10)	39.D50/20	39.E50/20 (M8)
					39.D50/20-M12 (M12x23)	39.E50/20-M10 (M10)
						39.E50/20-M12 (M12)
50	21		39.B50/21			
50	25	39.M5025		39.C50/25 (M10)	39.D50/25 (M10x20)	39.E50/25 (M10)
					39.D50/25-M12 (M12x23)	39.E50/25-M12 (M12)
50	27					
50	28					
50	30	39.M5030	39.B50/30	39.C50/30	39.D50/30	
				39.C50/30-M8	39.D50/30-M10 (M10x20)	
				39.C50/30-68		
50	35			39.C50/35		
50	37					
50	40	39.M5040		39.C50/40-M12		39.E50/40 (M10)
				39.C50/40		39.E50/40-M12 (M12)
50	42					
50	45	39.M5045		39.C50/45		
50	50	39.M5050	39.B50/50			
50	80		39.B50/50-M10 (M10x28)			
60	15					
60	16					
60	20					
60	25					
60	30		39.B60/30 (M12x25)	39.C60/30-M8 (M8)	39.D60/30 (M10x28)	39.E60/30 (M10)
				39.C60/30 (M10)	39.D60/30-M12 (M12x23)	
60	35	39.M6035				39.E60/30-M12 (M12)
60	40		39.B60/40	39.C60/40	39.D60/40 (M10x28)	39.E60/40 (M10)
				39.C60/40-M10 SH 43	39.D60/40.M12 (M12x23)	39.E60/40-M12 (M12)
				39.C60/40-M12 SH 43		
60	45					
60	50	39.M6050			39.D6050	
60	60					
65	35			39.C65/35	39.D65/35	
				39.C65/35.M10 (M10)		
70	20					
70	25					
70	30					
70	35					39.E70/35 (M12)
70	40				39.D70/40 (M10x28)	
					39.D70/40-M12 (M12x27)	
70	45					
70	50					39.E70/50 (M12)
70	53					
70	55					
70	60					
70	70				39.D70/70	

G	h
M6	6, 8, 10, 12, 15, 18, 20, 23, 28
M8	8, 10, 12, 15, 18, 20, 23, 25, 28, 33

G	h
M10	10, 12, 15, 18, 20, 23, 25, 28 ,33, 38, 43
M12	10, 12, 18, 20, 23, 25, 27, 33, 37, 42

Fåes i tre hårdheder: Shore 43, 55 og 68.
Også mulighed for rustfri gevind.
Available in three hardnesses: SH 43, 55 and 68.
Also option for stainless threads.

Vibrationsdæmpere / Vibration muffler

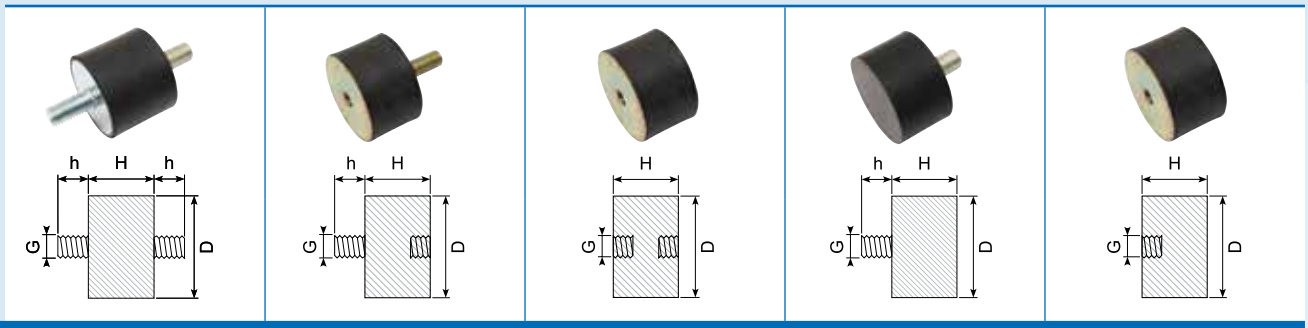

D	H	Type M (1)	Type B (2)	Type C (3)	Type D (4)	Type E (5)
75	20					
75	25					
75	30		39.B75/30 (M12x25)	39.C75/30 (M12)	39.D75/30	39.E75/30 (M10)
				39.C75/30-M10 (M10)		39.E75/30-M12 (M12)
75	35					
75	40	39.M7540	39.B75/40 (M12x25)			
75	45			39.C70/45-M10		
75	50	39.M7550	39.B75/50 (M12x25)		39.D75/50-M10 (M10x28)	39.E75/50 (M10)
						39.E75/50-M12 (M12)
75	55			39.C75/55		
				39.C75/55-43		
				39.C75/55-M10 (M10)		
75	60	39.M7560				
75	70					
75	100			39.C75/100		
				39.C75/100-M16		
80	17					
80	18					
80	30					
80	40					
80	50	39.M8050				39.E80/50 (M12)
						39.E80/50-M16 (M16)
80	55					
80	60					
80	65					
80	70					
80	75					
80	80					
90	60					
100	25					39.E100/25 (M16)
100	30		39.B100/30 (M16x46)		39.D100/30 (M16x41)	39.E100/30 (M16)
100	35					
100	40		39.B100/40 (M16x46)	39.C100/40		39.E100/40 (M16)
100	45					
100	50		39.B100/50 (M16x46)	39.C100/50 (M16)	39.D100/50 (M16x41)	39.E100/50 (M16)
100	55					
100	60					
100	65					
100	70					
100	75		39.B100/75 SH 43	39.C100/75 (M16)	39.D100/75 (M16x41)	39.E100/75 (M16)
100	80					
100	100					
150	40			39.C150/40		
150	50			39.C150/50	39.D150/50 (M16x41)	39.E150/50 (M16)
						39.E150/50-M20 (M20)
150	55					
150	60					
150	75			39.C150/75 (M16)		39.E150/75 (M16)
						39.E150/75-M20 (M20)
200	100			39.C200/100 (M20)	39.D200/100 (M20x41)	39.E200/100 (M20)

G	h
M6	6, 8, 10, 12, 15, 18, 20, 23, 28
M8	8, 10, 12, 15, 18, 20, 23, 25, 28, 33

G	h
M10	10, 12, 15, 18, 20, 23, 25, 28 ,33, 38, 43
M12	10, 12, 18, 20, 23, 25, 27, 33, 37, 42

Fåes i tre hårdheder: Shore 43, 55 og 68.
Også mulighed for rustfri gevind.
Available in three hardnesses: SH 43, 55 and 68.
Also option for stainless threads.





KP-D-no.	KP-E-no.	D/H	D	H	G	h
39.KP-D10/10	39.KP-E10/10	10/10	10	10	M5	12
39.KP-D15/22	39.KP-E15/22	15/22	15	22	M6	18
39.KP-D20/15	39.KP-E20/15	20/15	20	15	M6	10
39.AV2024	39.KP-E20/24	20/24	20	24	M6	18
39.KP-D25/16	39.KP-E25/16	25/16	25	16	M6	18
39.KD25/17		25/17	25	17	M6	8
39.KP-D25/20	39.KP-E25/20	25/20	25	20	M6	18
39.KP-D30/30	39.KP-E30/30	30/30	30	30	M8	20
39.KP-D30/36	39.KP-E30/36	30/36	30	36	M8	20
39.AV30		30/40	30	40	M8	23
	39.KP-E35/40	35/40	35	40	M8	23
39.KD50/18		50/18	50	18	M10	18
39.KD50/50	39.KP-E50/50	50/50	50	50	M10	28
39.AV50		50/55	50	55	M10	27
39.KP-D50/58		50/58	50	58	M10	28
39.KP-D50/61	39.KP-E50/61	50/61	50	61	M8	28
39.KP-D50/67	39.KP-E50/67	50/67	50	67	M8	33
39.AV5068	39.KP-E50/68	50/68	50	68	M10	38
39.KP-D60/40	39.KP-E60/40	60/40	60	40	M10	28
39.KP-D70/58	39.KP-E70/58	70/58	70	58	M12	32
39.KP-D70/60	39.KP-E70/60	70/60	70	60	M12	37
39.KP-D75/89	39.KP-E75/89	75/89	75	89	M12	37
39.AV9580	39.KP-E95/80	95/80	95	80	M16	41
39.KP-D115/136	39.KP-E115/136	115/136	115	136	M16	41
39.KP-D118/77	39.KP-E118/77	118/77	118	77	M16	41

39.103195



Material: NBR
Hardness: SH 55

Skaffevare / Special order item



Material: Black EPDM
Hardness: SH 70
Fenders for harbours, loading ramps w. m.

Art.	A	B	C	D	E	F	Kg/m
39.3872	40	25	28	5	10	20	0,57
39.3873 *	55	40	38	8	15	32	1,39
39.3875 *	60	50	40	10	20	42	1,75
39.4087 *	60	52	30	11	11	43	2
39.3876	80	65	50	12	25	39	3,2
39.3887 *	80	70	40	15	0	68	3,5
39.4333 *	80	70	54	15	16	59	4
39.2486 *	82	67	42	15	15	57	3,5
39.4156 *	109	117	50	42	50	95	10,5
39.3846 *	110	95	50	22	18	76	6,1
39.3874 *	110	95	70	15	30	80	5,79
39.4399 *	110	130	70	20	45	110	7,8
39.3010 *	120	110	70	14	35	95	7,39
39.3868 *	150	130	100	20	40	110	10,82
39.4178 *	150	160	105	50	60	130	16,3
39.3722 *	160	138	92	33	0	105	15,83
39.3240 *	170	130	110	15	45	110	10,5



Material: Black EPDM
Hardness: SH 70
Fenders for vans harbours, loading ramps etc.

Art.	B	H	L	Kg/m
39.674	40	22	20 m	0,715
39.678	60	50	10 m	2,1
39.678X *	50	60	20 m	2,1
39.680X	84	70	20 m	3,7
39.684X	110	95	10 m	7,076
39.684XS *				
39.685 *	120	120	3 m	11,204

Soft. SH 45. Min. order: 40 m

Material: White

Art.	B	H	L	Min. order
39.680H *				100 m
39.680H-1180	84	70	1.180 mm	

39.4380X



Material: NR / SBR
Length: 2 m

39.3803X



Material: NR / SBR
Length: 2 m

39.3904X



Material: NR / SBR
Length: 2 m

* **Skaffevare** / Special order item



Material: Black EPDM
Hardness: SH 70
Fenders for harbours, loading ramps w. m.

Art.	A	B	C	D	E	Kg/m
39.3581	30	25	11	7,5	11	0,67
39.36412 *	40	75	23	32	23	3,76
39.2776 *	51	45	20	10	20	2,08
39.3428 *	65	70	35	18	28	2,99
39.3029 *	80	80	40	25	35	5,54
39.3700 *	80	78	56	12	54	3,55
39.3925 *	80	80	40	23	40	5,59
39.4229 *	80	70	46	25	20	4,57
39.4110 *	95	100	38	30	45	5,4
39.3051 *	100	80	50	25	30	7,05
39.3802	100	80	80	12	56	3,68
39.3923 *	100	95	44	29	40	8,1
39.3952 *	100	95	60	20	50	6,99
39.4251 *	100	60	50	20	20	5,81
39.4403 *	100	95	60	28	42	6,27
39.4310 *	107	67	40	22	20	6,4
39.3726 *	110	110	50	30	25	12,14
39.3878 *	120	70	30	20	30	6,41
39.93 *	120	120	70	44	51	11,84
39.4381 *	125	100	65	33	37	10,87
39.69 *	130	150	50	50	50	21,05
39.4257 *	130	145	40	55	40	17,24
39.3813 *	140	125	85	35	55	14,75
39.3815 *	140	80	60	20	36	10,27
39.3381 *	150	150	85	30	85	18,81
39.4129 *	150	130	50	55	50	20
39.4224 *	150	150	92	29	92	14,7
39.4244 *	150	180	45	87	40	27,8
39.4380	150	150	80	40	75	18,22
39.3366 *	160	125	90	25	65	15,82
39.4311 *	160	175	68	79	68	17,1
39.57 *	200	165	40,5	80	40,5	31,44
39.3023 *	190	195	21	89	21	40,57
39.4012 *	190	195	55	89	55	37,7
39.3803 *	200	150	148	14	113	11,81
39.4249 *	200	220	75	82	75	42,39
39.4250 *	200	220	100	38	80	39,38
39.4269 *	200	220	75	82	75	36,85
39.3849 *	240	260	110	90	110	54,54
39.3879 *	250	290	120	60	110	48,96
39.56 *	250	200	136	50	100	39,84
39.4054 *	280	190	180	50	90	38,5
39.79 *	300	254	150	75	104	68,25
39.55 *	350	350	220	80	165	97,68

* **Skaffevare** / Special order item

D-fender

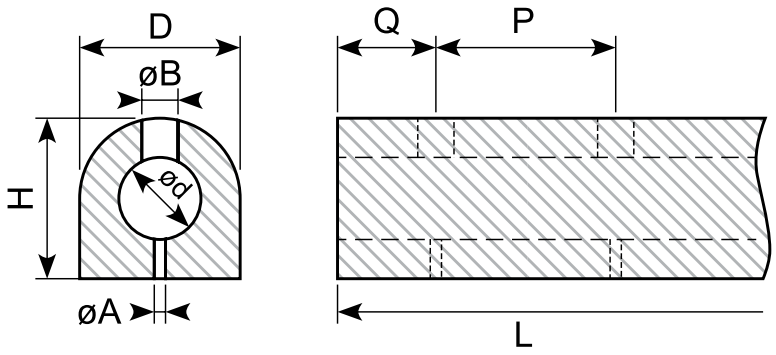

Art.	H	D	A	B	d	Q	P	L
39.200200 *	200	200	25	60	100	150	300	1.500
39.300300 *	300	300	29	65	150	150	300	1.500

D-fender

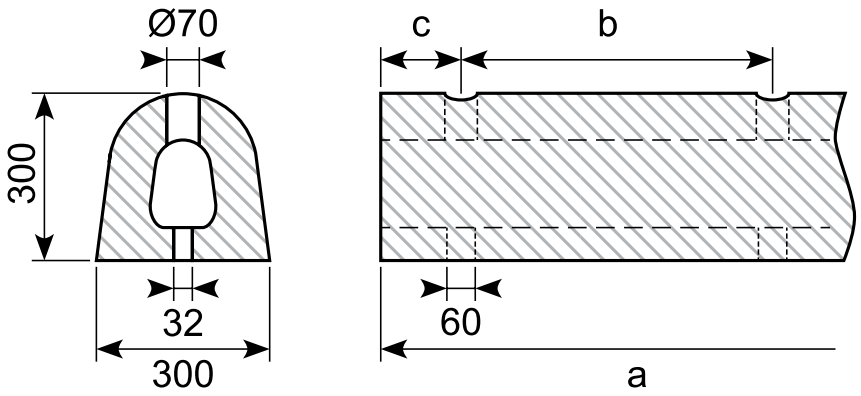

Art.	Size	a (mm)	b (mm)	c (mm)	Mounting holes	Weight
*	D300HX900L-2h	900	600	150	2	62
*	D300HX1000L-2h	1.000	600	250	2	69
*	D300HX1500L-3h	1.500	600	150	3	103
39.300300A *	D300HX1500L-5h	1.500	320	110	5	103
*	D300HX1500-5h-S	1.500	320	110	5	98
*	D300HX2000-4h	2.000	500	250	4	210

39.500500A *

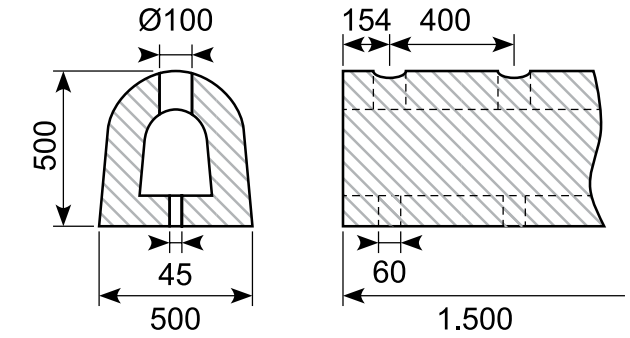

D-fender

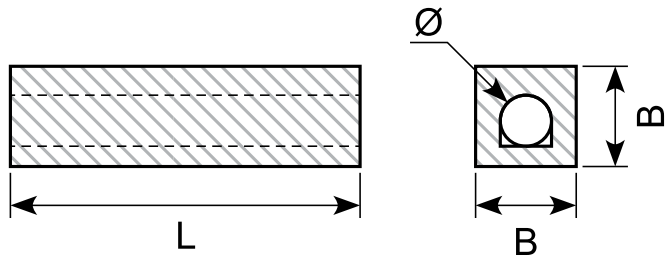

Art.	B (mm)	Ø (mm)
*	150	75
*	200	100
*	250	125
39.300300FK *	300	150
*	400	200
*	500	250

Længder fra 500 - 3.000 mm /
Lengths from 500 - 3.000 mm

* **Skaffevare** / Special order item

DD-fender

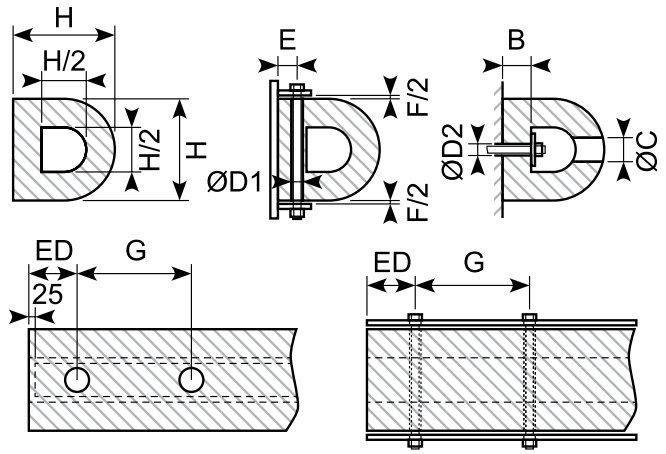

Art.	H (mm)	B (mm)	C (mm)	D1 (mm)	D2 (mm)	F (mm)	G (mm)	ED (mm)	Flat bar (mm)	Anchors	Weight (kg/m)
*	100 x 100	25	30	18	24	10	200-300	90-130	40 x 5	M12	8,3
*	150 x 150	37,5	40	24	32	12	250-350	110-150	60 x 8	M16	18
*	200 x 200	50	50	30	40	15	300-400	130-180	80 x 10	M20	32
*	250 x 250	62,5	60	36	48	20	350-450	140-200	90 x 12	M24	50
39.DD300300 *	300 x 300	75	60	36	48	25	350-450	140-200	110 x 12	M24	72
*	350 x 350	87,5	75	45	60	25	350-450	140-200	130 x 15	M30	103,6
*	380 x 380	95	75	45	60	30	350-450	140-200	140 x 15	M30	122,1
*	400 x 400	100	75	45	60	30	350-450	140-200	150 x 15	M30	128
*	500 x 500	125	90	54	72	40	400-500	160-230	180 x 20	M36	200

SD-fender

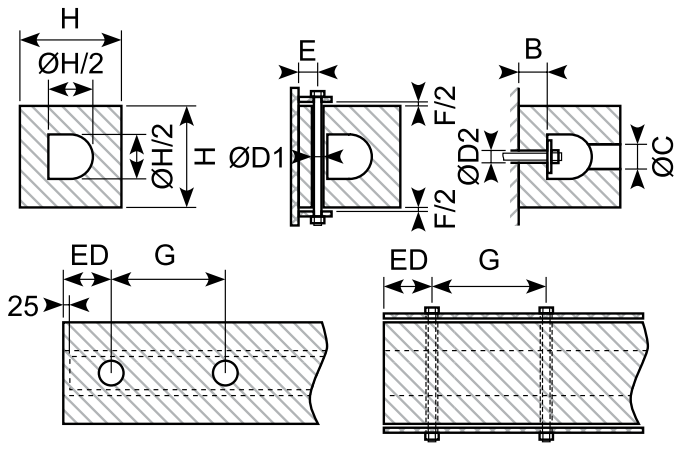

Art.	H (mm)	B (mm)	C (mm)	D1 (mm)	D2 (mm)	E (mm)	F (mm)	G (mm)	ED (mm)	Flat bar (mm)	Anchors	Weight (kg/m)
*	100 x 100	25	30	18	24	25	10	200-300	90-130	40 x 5	M12	9,5
*	150 x 150	37,5	40	24	32	30	12	250-350	110-150	50 x 8	M16	22,1
*	200 x 200	50	50	30	40	45	15	300-400	130-180	70 x 10	M20	38,7
39.SD300250 *	250 x 250	62,5	60	36	48	50	20	350-450	140-200	90 x 12	M24	59,3
39.SD300300 *	300 x 300	62,5	60	36	48	50	25	350-450	140-200	100 x 12	M24	73
*	350 x 350	75	75	45	60	60	25	350-450	140-200	100 x 15	M30	89,3
*	400 x 400	100	75	45	60	80	30	350-450	140-200	150 x 15	M30	148,5
*	500 x 500	125	90	54	72	90	40	400-500	160-230	180 x 20	M36	232,1

* **Skaffevare** / Special order item

DC-fender

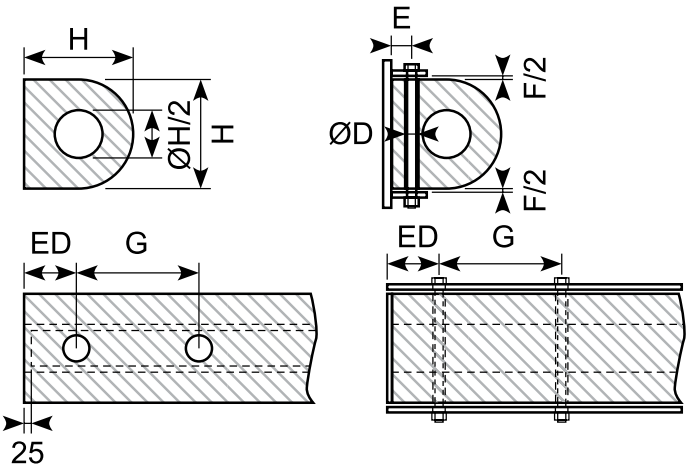

Art.	H (mm)	D (mm)	E (mm)	F (mm)	G (mm)	ED (mm)	Anchors	Weight (kg/m)
*	100 x 100	18	25	10	200-300	90-130	M12	9,9
*	150 x 150	24	30	12	250-350	110-150	M16	20
*	200 x 200	30	45	15	300-400	130-180	M20	37,4
*	250 x 250	36	50	20	350-450	140-200	M24	57,2
39.DC300300 *	300 x 300	36	60	25	350-450	140-200	M24	81,3
*	350 x 350	45	70	25	350-450	140-200	M30	109,5
*	400 x 400	45	80	30	350-450	140-200	M30	142
*	500 x 500	54	90	40	400-500	150-230	M36	208

SC-fender

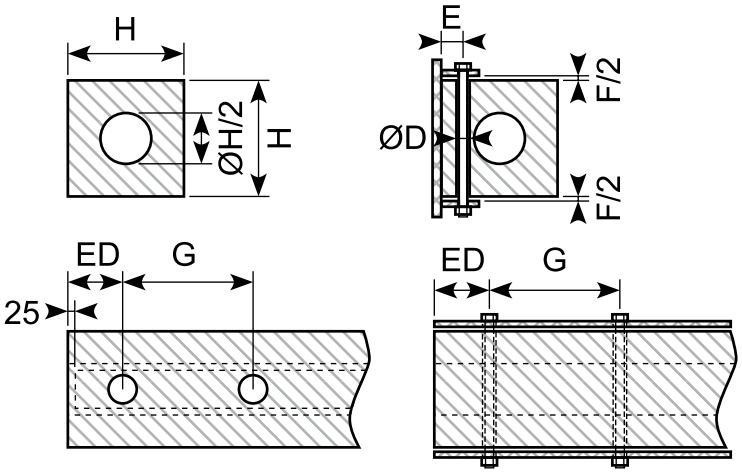

Art.	H (mm)	D (mm)	E (mm)	F (mm)	G (mm)	ED (mm)	Anchors	Weight (kg/m)
*	100 x 100	18	25	10	200-300	90-130	M12	11,1
*	150 x 150	24	30	12	250-350	110-150	M16	22,9
*	200 x 200	30	45	15	300-400	130-180	M20	42,6
*	250 x 250	36	50	20	350-450	140-200	M24	65,3
39.SC300300 *	300 x 300	36	60	25	350-450	140-200	M24	92,9
*	350 x 350	45	70	25	350-450	140-200	M30	117,6
*	400 x 400	45	80	30	350-450	140-200	M30	153,6
*	500 x 500	54	90	40	400-500	150-230	M36	240,1

* **Skaffevare** / Special order item

Keyhole fender *

Wing-type-fender *

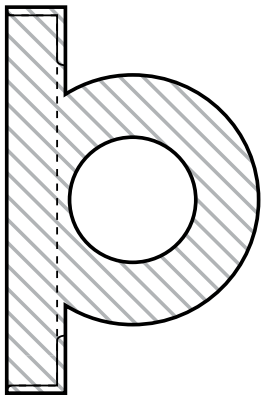

MC-fender *

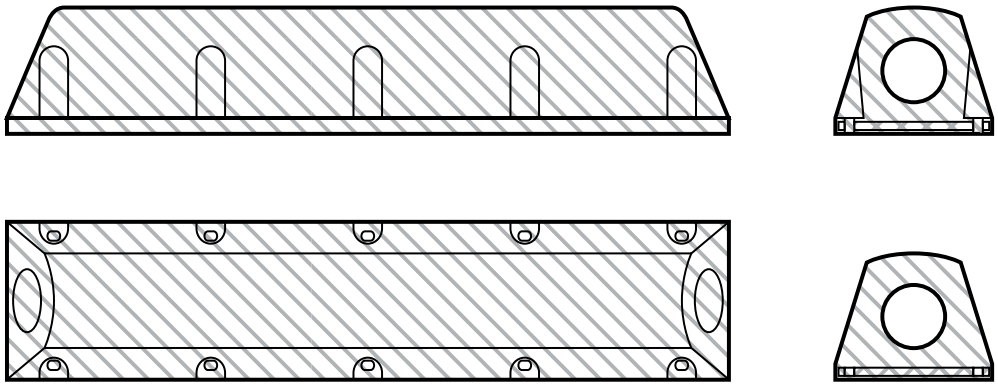

KF-A-fender

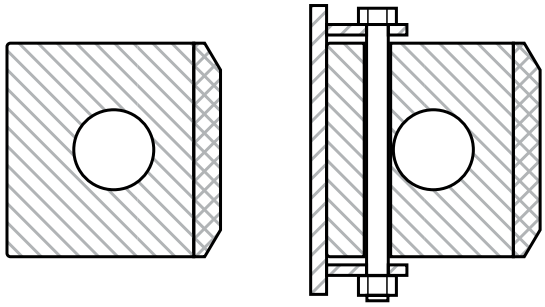

KF-B-fender *

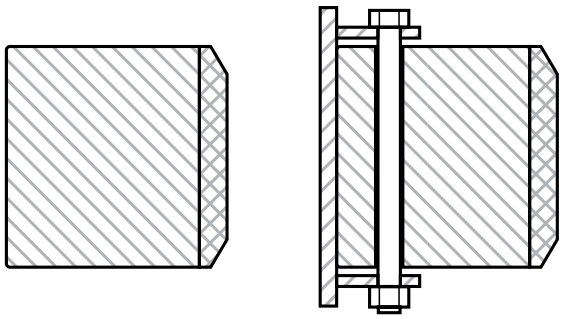

KF-C-fender *

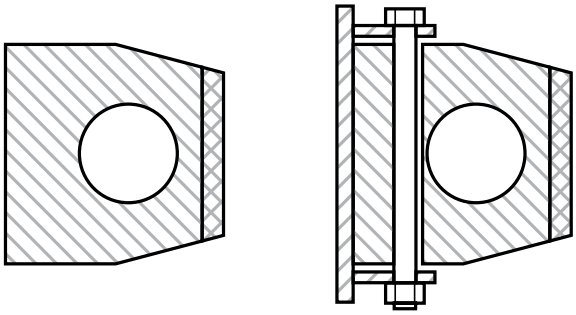

KF-D-fender *

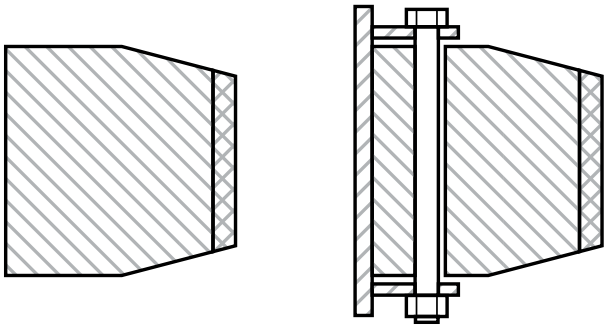

Børste- og flock-lister / Brush sections



Art.	Type	A mm	B mm	C mm	D mm	E mm	L m
57.400/1 *	A	27	10,3	5,3	11,4	5,2	1
57.400/2	A	27	10,3	5,3	11,4	5,2	2
57.400/3 *	A	27	10,3	5,3	11,4	5,2	3
57.401/1	B	31	13,5	6,7	10,8	6,5	1
57.401/2 *	B	31	13,5	6,7	10,8	6,5	2
57.401/3 *	B	31	13,5	6,7	10,8	6,5	3
57.402/1 *	C	34	15	8,4	10,6	7,7	1
57.402/2	C	34	15	8,4	10,6	7,7	2
57.402/3 *	C	34	15	8,4	10,6	7,7	3
57.403/1 *	D	51,8	23,8	10,8	17,2	10	1
57.403/2 *	D	51,8	23,8	10,8	17,2	10	2
57.403/3 *	D	51,8	23,8	10,8	17,2	10	3
57.404/1 *	E	71	41	11,5	18,5	10,3	1
57.404/2	E	71	41	11,5	18,5	10,3	2
57.404/3	E	71	41	11,5	18,5	10,3	3
57.405/1 *	GS	78,5	44,5	14,5	19,5	13,5	1
57.405/2 *	GS	78,5	44,5	14,5	19,5	13,5	2
57.405/3 *	GS	78,5	44,5	14,5	19,5	13,5	3
57.406/1 *	GM	98,3	64,3	14,5	19,5	13,5	1
57.406/2 *	GM	98,3	64,3	14,5	19,5	13,5	2
57.406/3	GM	98,3	64,3	14,5	19,5	13,5	3
57.407/1 *	GL	135,6	101,6	14,5	19,5	13,5	1
57.407/2 *	GL	135,6	101,6	14,5	19,5	13,5	2
57.407/3 *	GL	135,6	101,6	14,5	19,5	13,5	3

57.401/3BX Brushes for 57.401. 3 m lengths.



Art.	Type	A mm	B mm	C mm	D mm	L m
57.440/1 *	A	10,3	5,3	14	5,2	1
57.440/2 *	A	10,3	5,3	14	5,2	2
57.440/3 *	A	10,3	5,3	14	5,2	3
57.441/1 *	B	13,5	6,7	17,5	6,5	1
57.441/2 *	B	13,5	6,7	17,5	6,5	2
57.441/3 *	B	13,5	6,7	17,5	6,5	3
57.442/1 *	C	15	8,4	22	8,1	1
57.442/2	C	15	8,4	22	8,1	2
57.442/3 *	C	15	8,4	22	8,1	3
57.443/1 *	D	23,8	10,8	27	10	1
57.443/2 *	D	23,8	10,8	27	10	2
57.443/3 *	D	23,8	10,8	27	10	3
57.444/1 *	E	41	11,5	29	10,3	1
57.444/2 *	E	41	11,5	29	10,3	2
57.444/3 *	E	41	11,5	29	10,3	3
57.445/1 *	GS	44,5	14,5	35	13,5	1
57.445/2 *	GS	44,5	14,5	35	13,5	2
57.445/3 *	GS	44,5	14,5	35	13,5	3
57.446/1 *	GM	64,3	14,5	35	13,5	1
57.446/2	GM	64,3	14,5	35	13,5	2
57.446/3 *	GM	64,3	14,5	35	13,5	3
57.447/1 *	GL	101,6	14,5	35	13,5	1
57.447/2	GL	101,6	14,5	35	13,5	2
57.447/3 *	GL	101,6	14,5	35	13,5	3

* **Skaffevare** / Special order item

57.403/2.5J



Material: Aluminium with polypropylene brush
Length: 2,5 m

57.405/2J



Material: Aluminium with polypropylene brush
Length: 2 m

57.443/2JP





Material: Plastic with polypropylene brush
Length: 2 m

33.621



Rubber / fabric / brush
4 - 5 mm glass
Steel

33.623



Rubber / fabric / brush
4 - 6 mm glass
Steel

33.611



Self-adhesive list with brushes and waterproof center film

33.615



Self-adhesive list with brushes.

33.613



33.670



Flocked channel molding

33.671 *



Material: EPDM
Density: 1,28
Hardness: SH 70
Min. order: 2.000 m
Flock: 3,3 dtex

33.672 *



Material: EPDM
Density: 1,28
Hardness: SH 70
Min. order: 2.000 m
Flock: 3,3 dtex

33.673 *



Material: EPDM
Density: 1,28
Hardness: SH 70
Min. order: 2.000 m
Flock: 3,3 dtex

* **Skaffevare** / Special order item

Børste- og flock-lister / Brush sections

33.674 *



Material: EPDM
Density: 1,28
Hardness: SH 70
Min. order: 3.000 m
Flock: 3,3 dtex

33.675 *



Material: EPDM
Density: 1,28
Hardness: SH 70
Min. order: 3.000 m
Flock: 3,3 dtex

33.676 *



Material: EPDM
Density: 1,28
Hardness: SH 70
Min. order: 3.000 m
Flock: 3,3 dtex

30.13066 *



Material: EPDM
Density: 1,28
Hardness: SH 70
Min. order: 3.000 m
Flock: 3,3 dtex
Glass width: 5 mm

33.624 *



Material: EPDM
Density: 1,28
Hardness: SH 70
Min. order: 3.000 m
Flock: 3,3 dtex

33.625 *



Material: EPDM
Density: 1,28
Hardness: SH 70
Min. order: 3.000 m
Flock: 3,3 dtex

30.14803 *



Material: EPDM
Density: 1,28
Hardness: SH 70
Min. order: 3.000 m
Flock: 3,3 dtex

33.416



Edge trim: PVC with brush
Grip range: 1 - 2,5 mm
Hardness: SH 78
Insert: 25 x 0,48 mm steel
New brush

Lydabsorption / Sound absorption

Selvklæbende skum med Tedlarbelægning
Benyttes, alt afhængig af folieafdækning i førerkabiner, motorrum, kompressorer, generatorer, ventilatorer, turbiner, pumper og lignende.

Self-adhesive foam with Tedlar coat
Depending on the foil covers this is used in cabs, engine compartment, compressors, generators, fans, turbines, pumps or the like.

Art.	Farve / Color	Overflade / Surface	Dimension (mm)
48.603	Hvid / White	Plan 100% Plane 100%	20 x 1.200 x 1.500
48.604	Hvid / White	Plan 100% Plane 100%	30 x 1.200 x 1.500

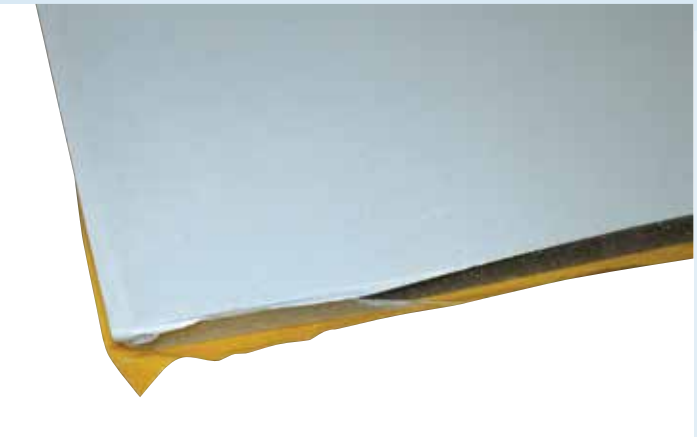

Selvklæbende skum med Bitumenindlæg
Self-adhesive foam with Bitumen inserts

Art.	Farve / Color	Overflade / Surface	Dimension (mm)
48.613K	Hvid / White	Plan 100% Plane 100%	33 x 600 x 1.000

Self-adhesive foam with rubber surface
Selvklæbende skum med gummioverflade

Art.	Farve / Color	Overflade / Surface	Dimension (mm)
48.626	Sort / Black	Plan 100% Plane 100%	2 / 10 x 1.200 x 1.500

Lydisolering / Soundproofing

Lydisoleringsmaterialer er typisk lavet af åbencellede, fleksible skummaterialer i tungere densiteter. Den forøgede densitet er opnået ved at anvende regenereret skum.

Anvendelsesområdet kan typisk være lydisolering af motorrum i lystbåde, vindmøllehuse, kompressorer og andre støjende maskiner, hvor det er muligt at adskille støjkilden fra det omliggende område.

Da der ofte skal etableres et kølende luftskifte i disse situationer, laver man en lydsluse beklædt med lydabsorptionsmaeriale.

Granulatkoldskum med enestående lyddæmpningsevne. Benyttes til beklædning af motorrum, maskinafskærmninger, ventilationskamre og støjkabiner. Grundet den lave densitet kan den også, med fordel, anvendes som absorbent.

Soundproofing materials are typically made of open-celled, flexible foam materials in heavier densities. The increased density is achieved by using regenerated foam.

The field of application can typically be soundproofing of the engine compartment in yachting, wind turbine housings, compressors and other noisy machines where it is possible to separate the noise source from the surrounding area.

Because it is often necessary to assure a cooling air circulation in these situations you make a sound lock covered with soundproofing material.

Granulate cold foam with unique soundproofing ability. This is used for coating of engine compartment, machine guards, ventilation chambers and noise cabins. Due to the low density it may also be used as absorbent with advantage.

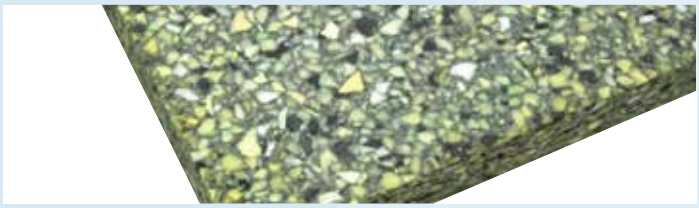

Art.	Overflade / Surface	Dimension (mm)
48.634	Ingen / None	20 x 500 x 1.000
48.635	Ingen / None	30 x 500 x 1.000
48.636	Ingen / None	40 x 500 x 1.000

Art.	Overflade / Surface	Dimension (mm)
48.634K	Klæb / Glue	20 x 500 x 1.000
48.635K	Klæb / Glue	30 x 500 x 1.000
48.636K	Klæb / Glue	40 x 500 x 1.000

Art.	Overflade / Surface	Dimension (mm)
48.634F	Folie / Foil	20 x 500 x 1.000
48.635F	Folie / Foil	30 x 500 x 1.000
48.636F	Folie / Foil	40 x 500 x 1.000
48.636FX	Folie / Foil	40 x 1.000 x 2.000

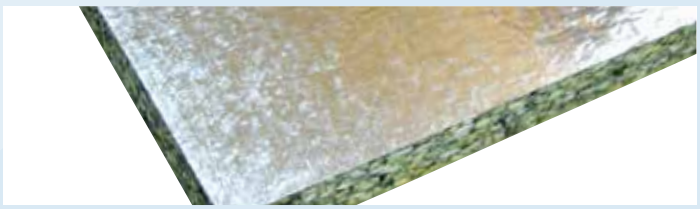

Art.	Overflade / Surface	Dimension (mm)
48.634KF	Folie og klæb / Foil and glue	20 x 500 x 1.000
48.635KF	Folie og klæb / Foil and glue	30 x 500 x 1.000
48.636KF	Folie og klæb / Foil and glue	40 x 500 x 1.000

Lydisolering / Soundproofing

Lydabsorption / Sound absorption

Lydabsorptionsmaterialer (PU) er typisk lavet af åbencellede, fleksible skummaterialer i lettere densiteter.

Anvendelsesområdet vil typisk være indvendig beklædning af førerkabiner, støjskærme, lydsluser, kanalvægge og ligende situationer, hvor det ikke er muligt at adskille støjkilden fra det omkringliggende område.

Soundproofing materials (PU) are typically made of open-celled, flexible foam materials in lighter densities.

The field of application will typically be interior sheathing of cabs, noise barriers, sound locks, canal walls and similar situations where it is not possible to separate the noise source from the surrounding area.

Selvklæbende skum uden folie

Anvendes til indvendig beklædning af motorrum, maskinafskærmninger, støjkabiner, el-styretavler, paneler, indlæg i emballage m.m.

Self-adhesive foam without foil

This is used for interior sheathing of engine compartment, machine guards, noise cabins, electrical control panels, panels and inserts in packaging with more.

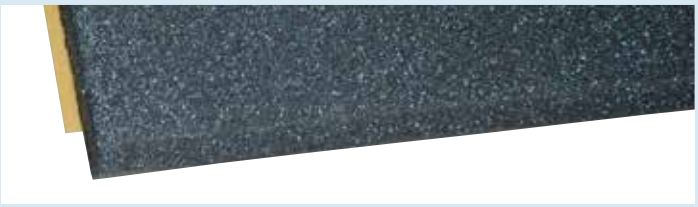

Art.	Overflade / Surface	Dimension (mm)
48.621	Plan / Plane	10 x 1.200 x 1.500
48.622	Plan / Plane	20 x 1.200 x 1.500
48.622X	Plan / Plane	30 x 1.200 x 1.500

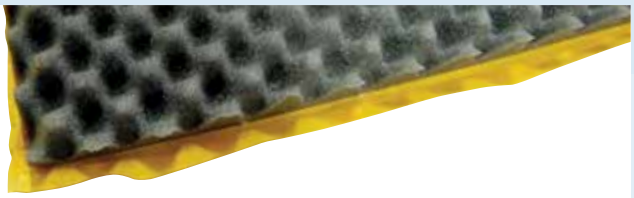

Art.	Overflade / Surface	Dimension (mm)
48.623	Æggebakke / Egg tray	30 / 15 x 1200 x 1500
48.624	Æggebakke / Egg tray	40 / 20 x 1200 x 1500
48.623X	Æggebakke / Egg tray	30 / 15 x 1.200 x 2.000

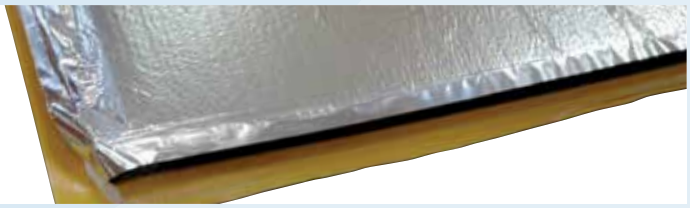

Art.	Color	Surface	Dimension (mm)
48.608	Alu.	Plane 100%	20 x 1.200 x 1.500
48.609	Alu.	Plane 100%	30 x 1.200 x 1.500

Selvklæbende skum med PVC-folie Benyttes, alt afhængig af folieafdækning, til beklædning i førerkabiner, motorrum, kompressorer, generatorer, ventilatorer, turbiner, pumper og lignende.

Self-adhesive foam with PVC foil Depending on the foil covers this is used for sheathing in cabs, engine compartment, compressors, generators, fans, turbines, pumps or the like.

Art.	Farve / Color	Overflade / Surface	Dimension (mm)
48.605X	Sort / Black	2% perforated	10 x 1.200 x 1.500
48.605	Sort / Black	2% perforated	20 x 1.200 x 1.500
48.605Y	Sort / Black	2% perforated	30 x 1.200 x 1.500

Art.	Farve / Color	Overflade / Surface	Dimension (mm)
48.451	Grå / Grey	2 % perf. / pap 2 % perf. / cardcoard	10 x 1.000 x 1.500
48.452	Grå / Grey	2 % perf. / pap 2 % perf. / cardcoard	20 x 1.000 x 1.500

Art.	Color	Surface	Dimension (mm)
48.605B *	Brown	2 % perforated	20 x 1.200 x 1.500

Min. order: 10 pcs.

* **Skaffevare** / Special order item

Soundproofing / Lyddæmpning

Lyddæmpningsmaterialer er typisk lavet af hårdt og tungt materiale.

Anvendelsesmulighederne kan typisk være dæmpning af store pladearealer, bundplader i biler/maskiner, dørsider og andre steder hvor der kan opstå resonans.

Soundproofing materials are typically made of hard and heavy material.

The field of application can typically be damping of large plate areas, bottom plates in cars / machinery, doors and other places where there may be resonance.

Bitumenplader er kunststofbasis

Bitumen plates are based on synthetic material

Art.	Surface	Pack	Dimension (mm)
48.544A	Adhesive	4 pk.	500 x 500 x 3
48.542	Adhesive	6 pk.	500 x 250

Art.	Surface	Pack	Thickness (mm)	Dimension (mm)
48.442	Adhesive	1 pc	1,7	500 x 1.050

Art.	Surface	Pack	Thickness (mm)	Dimension (mm)
48.612	Adhesive	1 pc	3	750 x 1.200

Varenr.	Thickness (mm)	Dimension (mm)
48.618	10	1.250 x 1.500

Tilbehør / Accessory

68.4250

Alutape til samling af motorisolering. 50 mm x 10 m.
Alu tape for the assembly of motor insulation. 50 mm x 10 m.

63.55030

Plastskive Ø50 mm til montering af motorisolering.
Plastic disc with 50 mm diameter for mounting of motor insulation.

Kinagummiplader / Rubber sheets from China

KINA GUMMIPLADER - COMMERCIAL QUALITY

Varerne er prisgunstige alternativer til Europa plader. Ikke en erstatning for europæiske kvaliteter.

Hele ruller leveres i plastfolie. Pladerne er et godt alternativ til hovedparten af de gængse opgaver. Anbefales ikke til højkvalitetspakninger med store krav til tolerancer og mekanisk styrke. Sammenlign evt. de tekniske beskrivelser. Pladerne har større tykkelsestolerancer end de europæiske. Mange andre kvaliteter kan skaffes i større mængder.

CHINA RUBBER SHEETS - COMMERCIAL QUALITY

Excellent alternatives to European sheets at very favourable prices. SHOULD NOT be understood as a substitute for European qualities. The rubber sheets are delivered on rolls wrapped in plastic. The sheets are good alternatives for most common tasks. Cannot be recommended for high-quality seals with high demands on tolerances and mechanical strength. In case of doubt please compare the technical descriptions. The sheets have higher tolerances on thickness than the European ones. Many other qualities are available if large quantities are required.

Gummimåtter / Rubber sheets

Sort prisgunstig gummiplade til almen brug, hvor der ikke stilles større krav til trækstyrke. Bruges til pakninger, mellemlæg m.m.

Black commercial rubber mat for normal use, where there are no specific demands on tensile strength. Useful for seals.

Art.	Thickness (mm)	Width (mm)	Length (mm)	Insertion
38.400-1.5	1,5	1.400	20.000	0
38.400-2	2	1.400	20.000	1
38.400-3	3	1.400	20.000	1
38.400-4	4	1.400	20.000	1
38.400-5	5	1.400	10.000	1
38.400-6/650	6	650	10.000	2
38.400-6	6	1.400	10.000	2
38.400-8	8	1.400	10.000	2
38.400-10	10	1.400	10.000	2
38.400-12	12	1.400	10.000	2
38.400-15	15	1.400	5.000	0
38.400-20	20	1.400	5.000	0
38.400-25	25	1.400	5.000	0

Data	
Gummi / Rubber	NR / SBR
Farve / Color	Black
Kvalitet / Quality	Commercial
Hårdhed / Hardness - Shore A	70
Densitet / Gravity - g/cm³	1,55
Forlængelse / Elongation - %	200
Arbejdstemperatur / Working temperature - °C	-20 +70
Trækstyrke / Tensile strength - N/mm²	4

Gummimåtter / Rubber sheets

Bus- og tog-gangmåtte, marble-mønster/farve. 2 meter bredde, fås i 25 meters ruller.

Bus and train walk-away mat, marble pattern/color. 2 metres wide, length 25 metres.

Art.	Thickness (mm)	Width (mm)	Length (mm)	Insertion
38.428	3	2.000	25.000	0

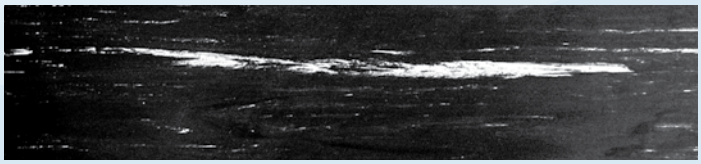

Data	
Mønster / Design	Marmor / Marble
Farve / Color	Black
Kvalitet / Quality	Commercial
Hårdhed / Hardness - Shore A	70
Densitet / Gravity - g/cm³	1,5
Forlængelse / Elongation - %	250
Arbejdstemperatur / Working temperature - °C	-40 +80
Trækstyrke / Tensile strength - N/mm²	3,5

Blød paragummi/naturgummi / Soft para rubber

Rød naturgummiplade. Meget blød, meget elastisk, stor friktion.

Red natural rubber sheet, very soft. Highly elastic, good friction.

Art.	Thickness (mm)	Width (mm)	Length (mm)	Insertion
38.401-2	2	1.400	10.000	0
38.401-3	3	1.400	10.000	0
38.401-4	4	1.400	10.000	0
38.401-5	5	1.400	10.000	0
38.401-6	6	1.400	10.000	0
38.401-10	10	1.400	10.000	0
38.401-15	15	14.000	5.000	0
38.401-20	20	14.000	5.000	0

Data	
Gummi / Rubber	Natur
Farve / Color	Rød / Red
Kvalitet / Quality	Commercial
Hårdhed / Hardness - Shore A	40
Densitet / Gravity - g/cm^3	1,25
Forlængelse / Elongation - %	550
Arbejdstemperatur / Working temperature - °C	-20 +90
Trækstyrke / Tensile strength - N/mm^2	18

EPDM Gummi Sort / Black

Sort EPDM gummi, meget god ozon- og vejrbestandighed.
God temperaturbestandighed.

Black EPDM rubber with high resistance to ozon and climate. Very resistant to cold and hot applications.

Art.	Thickness (mm)	Width (mm)	Length (mm)	Insertion
38.402-0,5	0,5	1.200	10.000	0
38.402-1X	1	1.400	20.000	0
38.402-2X	2	1.400	10.000	0
38.402-3X	3	1.400	10.000	0
38.402-4X	4	1.400	10.000	0
38.402-5X	5	1.400	10.000	0

Data	
Gummi / Rubber	EPDM
Farve / Color	Sort / Black
Kvalitet / Quality	Commercial
Hårdhed / Hardness - Shore A	70
Densitet / Gravity - g/cm^3	1,30
Forlængelse / Elongation - %	300
Arbejdstemperatur / Working temperature - °C	-40 +100
Trækstyrke / Tensile strength - N/mm^2	6 - 7

CR / Chloroprene Sort / Black

Sort CR gummiplade god vejr/vind- og ozonbestandighed, egnet hvor der ikke stilles krav til træk/rivstyrke. Betinget oliebestandig.

Black CR rubber plate, good climate resistance, used where there are no specific demands to tensile strength. Conditional oil resistance.

Art.	Thickness (mm)	Width (mm)	Length (mm)	Insertion
38.403-2	2	1.400	20.000	0
38.403-3	3	1.400	20.000	0
38.403-4	4	1.400	20.000	0
38.403-5	5	1.400	10.000	0
38.403-6	6	1.400	10.000	0
38.403-8	8	1.400	10.000	0

Data	
Gummi / Rubber	CR
Farve / Color	Sort / Black
Kvalitet / Quality	Commercial
Hårdhed / Hardness - Shore A	65
Densitet / Gravity - g/cm^3	1,55
Forlængelse / Elongation - %	280
Arbejdstemperatur / Working temperature - °C	-40 +90
Trækstyrke / Tensile strength - N/mm^2	3,5

Kinagummiplader / Rubber sheets from China

NBR / NITRIL - Sort / Black

Sort prisgunstig nitril med gode mekaniske egenskaber. Egnet til alle alfatiske og aromatiske olier, benzin.

Black commercial nitrile with good mechanical properties. Recommended for alfatic and aromatic oils, petrol.

Art.	Thickness (mm)	Width (mm)	Length (mm)	Insertion
38.304-1.5	1,5	1.400	20.000	0
38.404-2	2	1.400	20.000	0
38.404-3	3	1.400	20.000	0
38.404-4	4	1.400	20.000	0
38.404-5	5	1.400	10.000	0
38.404-6	6	1.400	10.000	0
38.404-8	8	1.400	10.000	0
38.404-10	10	1.400	10.000	0
38.404-12	12	1.400	5.000	0
38.404-15	15	1.400	5.000	0
38.404-20 *	20	1.400	5.000	0

Data	
Hårdhed / Hardness - Shore A	70
Densitet / Density - g/cm^3	1,49
Kvalitet / Quality	Commercial
Forlængelse / Elongation - %	330
Arbejdstemperatur / Working temperature - °C	-30 +70
Trækstyrke / Tensile strength - N/mm^2	10

Slid-gummi / Wearing rubber - Sort / Black

Slidgummi med høj træk/rivstyrke.
Egnet til alle stærkt slidende applikationer, grusgrave, sandblæsekabiner

Wearing/abrasion rubber with high tensile strength.
Recommended for wearing application, gravel pits, sandblasting.

Art.	Thickness (mm)	Width (mm)	Length (mm)	Insertion
38.405-6	6	1.400	10.000	0
38.405-8 *	8	1.400	10.000	0
38.405-10	10	1.400	10.000	0
38.405-10X *	10	2.000	10.000	0
38.405-15	15	1.400	10.000	0
38.405-20 *	20	1.400	5.000	0
38.405-40 *	40	1.200	7.000	0

Data	
Hårdhed / Hardness - Shore A	60
Densitet / Density - g/cm^3	1,30
Forlængelse / Elongation - %	400
Arbejdstemperatur / Working temperature - °C	-30 +70
Trækstyrke / Tensile strength - N/mm^2	15

* **Skaffevare** / Special order item

NR/SBR - Sort / Black - Grå / Grey

** = sort / black - 100% virgin quality SBR
Lugtfri / non-smelling

Finriflet gummimåtte, skridsikker måtte til kabiner, arbejdsborde, hylder, gangarealer, køretøjer, sportsaktiviteter, udstillinger.

Fine-ribbed rubber mat, non-slip coverings for cabins, working benches, shelves, corridors, vehicles, sporting facilities, exhibition floors.



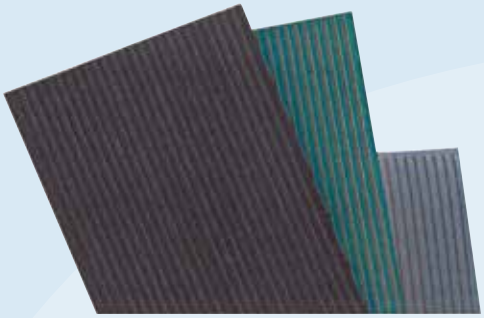

Art.	Thickness (mm)	Width (mm)	Length (mm)	Insertion	Color
38.407-3X **	3	1200	20000	0	Black
38.407-3 **	3	1400	20000	0	Black
38.407-3C	3	1400	20000	0	Black
38.407-3G	3	1400	20000	0	Grey
38.407-3XL	3,5	1.800	10.000	0	Black

Data	38.407-3C 38.407-3G	**
Hårdhed / Hardness - Shore A	70	70
Densitet / Density - g/cm³	1,6	1,6
Forlængelse / Elongation - %	280	280
Arbejdstemperatur / Working temperature - °C	-10 +70	-20 +70
Trækstyrke / Tensile strength - N/mm²	3,5	5

Busmåtte / Bus mats

NR / SBR = Natur / SBR

Mellemriflet måtte, egnet til gulv og vægbeklædning til busser, både, dyretransport, værksteder mm.

Medium-ribbed mat, recommended for floors and walls for buses, boats, animal transport, work shops.



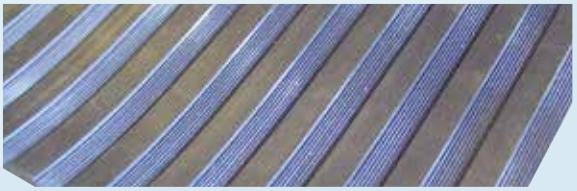

Art.	Thickness (mm)	Width (mm)	Length (mm)	Insertion
38.418	3	1.500	15.000	0
38.418N *	3	1.500	15.000	0

Data	38.418 NR / SBR	38.418N NBR
Hårdhed / Hardness - Shore A	70	70
Densitet / Density - g/cm³	1,6	1,45
Kvalitet / Quality	Commercial	Commercial
Forlængelse / Elongation - %	280	250
Arbejdstemperatur / Working temperature - °C	-10 +70	-10 +70
Trækstyrke / Tensile strength - N/mm²	3,5	6

Busmåtte / Bus mats - Commercial Quality

NR / SBR = Natur / SBR
** = Sort / Black - 100% virgin quality SBR
Lugtfri / Non smelling



Bredriflet måtte, egnet til gulv og vægbeklædning til busser, både, dyretransport, værksteder mm.

Wide-ribbed mat, recommended for floors and walls for buses, boats, animal transport, work shops.

Art.	Thickness (t) (mm)	Width (mm)	Length (mm)	Insertion
38.421C	5	1.400	10.000	0
38.420C	5	2.000	10.000	0
38.419 **	3,5	2.000	10.000	0
38.419X **	3,5	1.400	20.000	0
38.420 **	5	2.000	10.000	0
38.420 BOX ** (Wooden box)	5	2.000	50.000	0

Data	NR / SBR	SBR **
Hårdhed / Hardness - Shore A	70	70
Densitet / Density - g/cm³	1,6	1,6
Forlængelse / Elongation - %	280	280
Arbejdstemperatur / Working temperature - °C	-10 +70	-10 +70
Trækstyrke / Tensile strength - N/mm²	3,5	5

* **Skaffevare** / Special order item

Kinagummiplader / Rubber sheets from China

Diamantmåtte / Diamond mat

Skridsikker PVC-måtte

PVC mat non-skid

Art.	Thickness (mm)	Width (mm)	Length (mm)	Insertion
37.245P	3	1.200	10.000	0

Current stock avaliable

Data	
Hårdhed / Hardness - Shore A	80
Densitet / Density - g/cm³	1,6
Forlængelse / Elongation - %	280
Arbejdstemperatur / Working temperature - °C	-10 +70
Trækstyrke / Tensile strength - N/mm²	3,5

Knopmåtte / Studded Flooring

Knopmåtte, anbefales til trafikerede arealer, metro, lufthavne, supermarkeder, elevatorer, busser, toge, lastbiler, både m.m.

Studded flooring, recommended for high traffic areas such as metro, airports, supermarkets, lifts, buses, trains, trucks, boats.

Art.	Thickness (mm)	Width (mm)	Length (mm)	Insertion	Color
38.427-3C	3,5	1.200	10.000	0	Black
38.427-3GC	3,5	1.200	10.000	0	Grey

Data	Black	Grey
Hårdhed / Hardness - Shore A	65 - 70	65 - 70
Densitet / Density - g/cm³	1,5	1,6
Kvalitet SBR / Quality SBR	Commercial	Commercial
Forlængelse / Elongation - %	150	150
Arbejdstemperatur / Working temperature - °C	-20 +70	-20 +70
Brudstyrke / Tear resistance - N/mm²	3	3

Dørkmåtte / Checker mat

Dørkmåtte til industrigulve og maskinområder, varehuse, trafikerede områder, skridsikker overflade.

Studded flooring, recommended for high traffic areas such as metro, airports, supermarkets, lifts, buses, trains, trucks, boats.

Art.	Thickness (mm)	Width (mm)	Length (mm)	Insertion	Color
38.425-3	3	1.400	10.000	0	**
38.425-3C	3	1.400	10.000	0	C
38.425-5	5	1.400	10.000	0	**
38.425-5C	5	1.400	10.000	0	C
38.425N-3	3	1.400	10.000	0	NBR
38.425N-5	5	1.400	10.000	0	NBR
38.426-3	3	2.000	10.000	0	**
38.426-3C	3	2.000	10.000	0	C
38.426-5	5	2.000	10.000	0	**
38.426-5C	5	2.000	10.000	0	C
38.426-8C	8	2.000	10.000	0	C

Data	NR / SBR	NR / NBR Virgin **	NBR
Hårdhed / Hardness - Shore A	70	70	70
Densitet / Density - g/cm³	1,6	1,6	1,45
Forlængelse / Elongation - %	350	350	250
Arbejdstemperatur / Working temperature - °C	-10 +70	-10 +70	-10 +70
Trækstyrke / Tensile strength - N/mm²	3,5	5	6

NR/SBR = Natur / SBR
NBR = Oliebestandig / oil resistant
** = 100% Virgin quality lugtfri / non smelling / geruchsfrei
C = commercial quality

Viton-gummi

Art.	Thickness (mm)	Width (mm)	Length (mm)	Insertion
38.429-2 *	2	1.200	10.000	0

Min. order: 12 m²

Data	
Hårdhed / Hardness - Shore A	70
Densitet / Density - g/cm³	-
Forlængelse / Elongation - %	250
Arbejdstemperatur / Working temperature - °C	-
Trækstyrke / Tensile strength - N/mm²	7

* **Skaffevare** / Special order item

Rampemåtte / Rear Board Metting

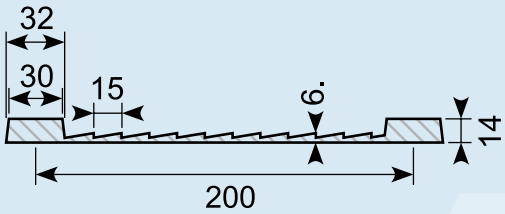

SBR - Sort / Black - Commercial

Art.	Thickness (mm)	Width (mm)	Length (mm)
37.250X	6/14	1.750	1.550

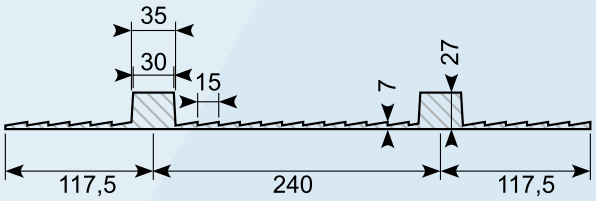

SBR - Sort / Black - Commercial

Art.	Thickness (mm)	Width (mm)	Length (mm)
37.251X		2.400	1.200

Data	37.250X	37.251
Hårdhed / Hardness - Shore A	SBR 70	SBR 65
Densitet / Gravity - g/cm^3	1,5	1,55
Forlængelse / Elongation - %	250	200
Arbejdstemperatur / Working temperature - °C	-40 +80	-20 +75
Trækstyrke / Tensile strength - N/mm^2	4	4,5

Gummimåtter / Rubber mats

Ergo Solid

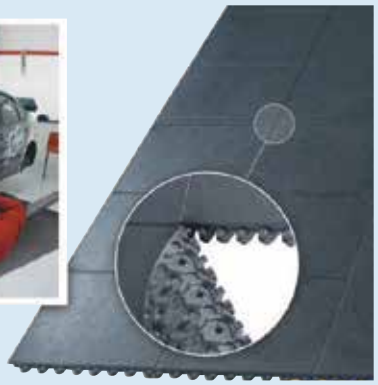



Ergo Solid - tegn på ergonomisk indsigt

Ergo Solid er en nitrilgummimåtte med fantastiske gode aflastnings-egenskaber og slidstyrke. Pladerne kan sammensættes fleksibelt uden anvendelse af samlingsstykker. Velegnet til arbejdspladser i industrien med enten tørt eller fedtet miljø.

- Tåler kontakt med varmt værktøj
- Oliebestandig
- Ryg og ben aflastes effektivt, hvilket resulterer i høj produktivitet og lavere sygefravær
- Affasede kanter minimerer risikoen for at snuble - findes ligeledes i gul for markering af arbejdsområde m.v.

Ergo Solid - shows ergonomical knowledge

Ergo Solid is a wear-resistant nitril rubber mat with excellent strain relief. The sheets may be joined together without the use of fittings. Suitable for workplaces in the industrial field - for dry or greasy environments.

- Tolerates contact with hot tools
- Oil resistant
- Bag and legs are effectively relieved resulting in a high productivity and less absence due to sickness.
- Chamfered edges keep the risk of stumbling to a minimum
- Available in yellow to mark the work area etc.

Art.	Name	Color	Size (m)	Height (mm)	Weight (kg)
38.9726230	Ergo Solid	Sort	0,91 x 0,91	19	8,2
38.9730030*	Skrå kant - male	Sort	0,08 x 0,91		1
38.9750030	Koppling	Sort	0,03 x 0,23		0,1
38.9730030S*	Skrå kant - female				

* Ved kant rundt om hele måtten. Bruges 2 han + 2 hun skråkanter. Grundmåtten har udvendige tappe på 2 sider.
* At the edge around the entire mat. Use 2 male + 2 female edges. The basic mat has exterior pins on 2 sides.

Ergo Bubble

Art.	Name	Color	Size (m)	Weight (kg)
38.8100110	Ergo Bubble	Grafit	0,65 x 0,95	3,2
38.8100310	Ergo Bubble *	Grafit	0,65 x 1,8	4
38.8103110	Ergo Bubble *	Grafit	0,95 x 1,2	4



Kan skaffes i oliebestandig NBR /
Obtained in oil resistant NBR
0,65 x 1,4 m
0,95 x 1,5 m
0,95 x 1,8 m

Boblemåtte

Ergo Bubble er en traditionel boblemåtte fremstillet af skum-polyuretan. Materialet har unikke elastiske egenskaber som sammen med bulerne i overfladen får benmusklerne til at arbejde og giver en god aflastning - samtidig med at den har meget høj slidstyrke. Måtten findes i flere standardstørrelser men kan derudover fremstilles efter dine specialmål. Samtlige Ergo Bubble har affasede kanter for at minimere snublerisikoen.

Er velegnet i alle tørre miljøer.

Bubble mat

Ergo Bubble is a traditional bubble mat made from foam-polyurethane. The material has unique elastic properties which, together with the bubbles in the surface, make the leg muscles work and provide excellent strain relief - at the same time the mat is extremely hard-wearing.

Available in several standard sizes - or custom-designed according to your special dimensions. All Ergo Bubble have chamfered edges to reduce the risk of stumbling to a minimum.

Suitable for use in all dry environments.

Ergo Durk

Art.		Name	Color	Size (m)	Weight (kg)
38.5017530	**	Ergo Durk	Sort	1,4 x 1	6,6
38.5017530	**	Ergo Durk	Sort	1,4 x 10	66

* **Måtten har en gummioverside og en underside af EPDM**.

* The mat has a rubber top side and a bottom side of EPDM.

En klassiker til mange arbejdspladser

Ergo Durk er en klassisk arbejdspladsmåtte med dørkmønstret overside i nitrilgummi. Bagsiden er af EPDM-cellegummi med lukkede celler.

Kombinationen af disse miljøvenlige materialer giver en både slidstærk og behagelig måtte at stå på. Desuden yders der 5 års komplet slitage-garanti.

Fås i standardmåtte fra rulle eller i specialmål efter tegning, alt med af-fasede kanter.

Ergo Durk ESD beskytter også følsomt elektronik imod statisk elektricitet. Måtten er godkendt i henhold til SP 2472.

A Classic for Many Workplaces

Ergo Durk is a classic workplace mat with a surface patterned like the deck of a ship and the upper side made of nitrile rubber. The back side is made of EPDM cellular rubber with closed cells.

The combination of these environmentally compatible materials provides a both hard-wearing and pleasant mat. Furthermore, there is a five-year guarantee against wear.

Available as a standard mat in a roll or in sheets specially made according to drawing - all with chamfered edges.

Ergo Durk ESD also protects sensitive electronics against static electricity. The mat has been approved acc. to SP 2472.

Ergo Dome

Ergo Dome, god måtte til gunstig pris

Ergo Dome er en slidstærk måtte i naturgummi (SBR).

Den buleformede overflade stimulerer blodcirkulationen hvilket mindsker belastnings-skader i ben og ryg.

Ergo dome, good mat at low prices.

Ergo dome is a durable mat of natural rubber (SBR).

The bulge-shaped surface stimulates blood circulation, which reduces stress injuries in the lags and back.

Art.	Name	Color	Size (m)	Weight (kg)
38.410200	Ergo Dome	Sort	0,6 x 0,9	3,2
38.410201	Ergo Dome	Sort	0,9 x 1,2	4
38.410203	Ergo Dome Puzzle midterstykke	Sort	0,9 x 1,2	4
38.410202	Ergo Dome Puzzle, endestykke	Sort	0,9 x 1,2	4

Puzzle er med **sorte** kanter, og det er muligt at samle 2 endestykker til f.eks. 2,4 m

Puzzle is with black borders, and it is possible to assemble two end pieces, for example 2.4 m.

Kan skaffes i oliebestandig NBR /
Obtained in oil resistant NBR
0,6 x 0,9 m
0,9 x 1,2 m





* **Skaffevare** / Special order item

Gummimåtter / Rubber mats

Ergo Ring

Kan skaffes i / Obtained in
0,4 x 0,6 og 0,6 x 0,8

Skridsikker i vådt og tørt

Ergo Ring bortdræner effektivt væde og spildmateriale, hvilket sikrer en skridsikker overflade at stå på. Den åbne ringkonstruktion giver desuden en god aflastning.

- Kan samles, hvilket giver mulighed for store sammenhængende, skridsikre overflader
- Dræner effektivt, ideel ved bearbejdningsmaskiner eller i våde lokaler
- God som grov dørmåtte i entreer
- Naturgummi med den rette hårdhed giver skridsikkerhed både i tørt og vådt miljø

Non-skid in wet and dry environment

Ergo Ring effectively drains off wet and waste material, which ensures a non-skid surface. The open annular construction provides an excellent strain relief.

- May be joined together to large coherent non-skid surfaces
- Drains effectively, ideal for machine tools or in wet premises
- Applicable as a coarse entrance door mat
- Natural rubber with the correct hardness provides skid resistance in both wet and dry environments.

Art.	Name	Color	Size (m)	Height (mm)	Weight (kg)
38.9117630	Ergo Ring	Sort	0,8 x 1,2	23	11
38.9117631	Ergo Ring	Sort	1 x 1,5	23	21
38.9110030	Samlestykke	Sort			

Ergo Ease

Art.	Name	Color	Size (m)	Height (mm)	Weight (kg)
38.9716230	Ergo Ease	Sort	0,91 x 0,91	14	8,2 kg

Kan skaffes i terracottarød / Obtained in terracotta red

Ergo Ease - kongen af aflastning

Ergo Ease er en nitrilgummimåtte med ekstremt gode aflastningsegenskaber og slidstyrke. Pladerne kan sammensættes fleksibelt uden anvendelse af samlingsstykker.

Velegnede til arbejdspladser i industrien med enten tørt eller fedtet miljø.

- Tåler kontakt med varmt værktøj
- Oliebestandig
- Ryg og ben aflastes effektivt, hvilket resulterer i høj produktivitet og lavere sygefravær
- Affasede kanter minimerer risikoen for at snuble - findes ligeledes i gul for markering af arbejdsområde m.v.

Ergo Ease - first-quality strain relief

Ergo Ease is a wear-resistant nitril rubber mat with excellent strain relief. The sheets may be joined together without the use of fittings. Suitable for workplaces in the industrial field in a dry or greasy environment.

Tolerates contact with hot tools

Oil resistant

Back and legs are effectively relieved resulting in a high productivity and less absence due to sickness.

Chamfered edges keep the risk of stumbling to a minimum. Available in yellow to mark the work area etc.

Ergo Classic

Art.	Name	Color	Size (m)	Weight (kg)
38.5501110	Ergo Classic	Grå	0,61 x 18,3	36 kg
38.5501210	Ergo Classic	Grå	0,91 x 18,3	50 kg
	Ergo Classic	Grå	1,22 x 18,3	

Skridsikker i vådt og tørt

Ergo Ring bortdræner effektivt væde og spildmateriale, hvilket sikrer en skridsikker overflade at stå på. Den åbne ringkonstruktion giver desuden en god aflastning.

- Kan samles, hvilket giver mulighed for store sammenhængende, skridsikre overflader
- Dræner effektivt, ideel ved bearbejdningsmaskiner eller i våde lokaler
- God som grov dørmåtte i entreer
- Naturgummi med den rette hårdhed giver skridsikkerhed både i tørt og vådt miljø

Non-skid in wet and dry environment

Ergo Ring effectively drains off wet and waste material, which ensures a non-skid surface. The open annular construction provides an excellent strain relief.

- May be joined together to large coherent non-skid surfaces
- Drains effectively, ideal for machine tools or in wet premises
- Applicable as a coarse entrance door mat
- Natural rubber with the correct hardness provides skid resistance in both wet and dry environments.

Fingertip

Art.	Name	Color	Size (m)
38.345522	Fingertip	Sort	0,8 x 1

Fingertip gummimåtte med skrå kant.

Fingertip rubber mat with beveled edge.

Smudsmåtter diamond blue / mat diamond blue

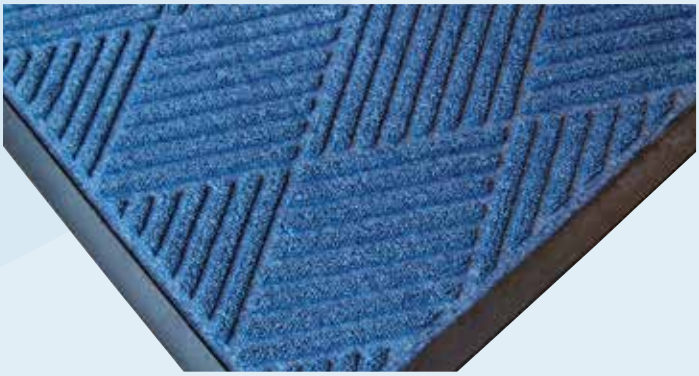

Art.	Color	Size (m)
38.623750	Blue	0,9 x 1,5
38.623752	Blue	0,6 x 0,9
38.623764	Blue	1,2 x 1,8

Dørmåtte blå, polypropylen med gummiskråkant.
Kan spules med højtryksrenser.

Blue mat, polypropylene with rubber beveled edge.
Can be flushed with high-pressure cleaner.

Kan skaffes i grå / Obtained in grey

Gummimåtter / Rubber mats

Vibrationsmatte / Vibration mat

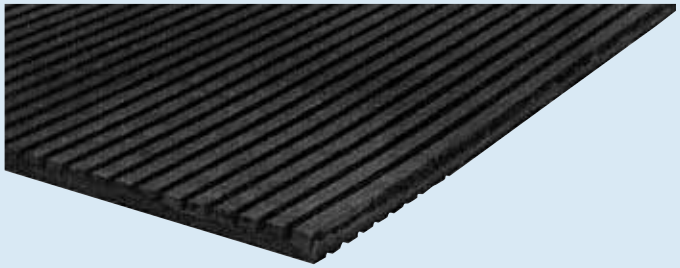

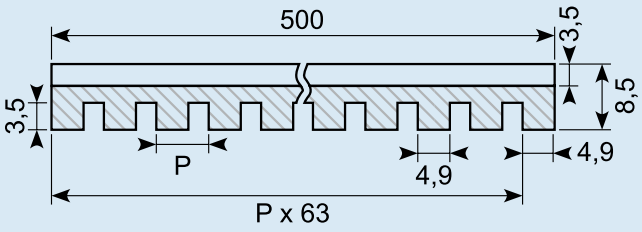

NR/SB

Art.	Thickness (mm)	Width (mm)	Length (mm)	Insertion
37.400	8,5	500	500	0



Sort, kommerciel gummiplade.
Anvendes mellem maskiner og gulv for at minimere og optage vibrationer.
Riller på begge sider.
Bæreevne 5 kg/cm²

Black commercial rubber plate.
To be used between machines and floor in order to minimize and absorb vibrations. Grooves on both sides.
Carrying capacity of 5 kg/cm².

Komåtte / Cow mat (NR / SBR)

Art.	Width (mm)	Length (mm)	Thickness (mm)	Shore	Density
38.440-6	2.000	30.000	6	65	1,45
38.440-8	2.000	30.000	8	65	1,45
38.440-8X	1.250	10.000	8	65	1,45
38.440-6A	1.750	21.000	6	65	1,45
38.440-8A	1.750	21.000	8	65	1,45

Komåtte / Cow mat (NR / SBR)

Art.	Thickness (mm)	Width (mm)	Length (mm)
37.260	10	2.000	20.000
37.261 *	10	2.000	4.870
37.262 *	10	2.000	6.522

37.280

Grisemåtte 1.810 x 1.210 x 30 mm.
Cirkler / hul bund uden indlæg.
Pigs mat 1.810 x 1.210 x 30 mm.
Circles / hollow bottom without insert.

37.263

Komåtte 2.200 x 10.000 x 16 mm. Overflade cirkler u/indlæg. Bund ribbet i længderetning.
Cow mat 2.200 x 10.000 x 16 mm. Surface circles without insert. The bottom ribbed in longitudinal direction.

37.270

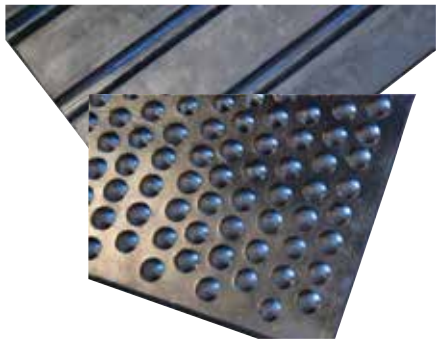

Komåtte 1.830 x 1.220 x 17 mm.
Knopper / ribbet bund uden indlæg.
Cow mat 1.830 x 1.220 x 17 mm. Studs / ribbed bottom without insert.

Trailermåtte / Trailer mat

Data	
Gummi / Rubber	NR / SBR
Hårdhed / Hardness - Shore A	65
Densitet / Density - g/cm³	1,4
Arbejdstemperatur / Working temperature - °C	-25 +70
Trækstyrke / Tensile strength - N/mm²	12

Art.	Thickness (mm)	Width (mm)	Length (mm)
38.422-1350	6	1.350	21.000
38.422-1650	6	1.650	21.000
38.422-1750 *	6	1.750	21.000
38.423-1650	8	1.650	21.000
38.423-1750 *	8	1.750	21.000
38.424-1800 *	8	1.800	21.000

* **Skaffevare** / Special order item

Klar PVC / Transparent PVC

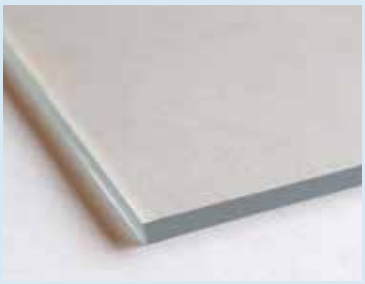

Art.	Thickness (mm)	Width (mm)	Length (mm)
38.449-750 *	3	750	20.000
38.449-1200	3	1.200	20.000
38.450-760 *	4	760	13.000
38.451-1600	5	1.600	20.000
38.452-1200 *	7	1.200	10.000

Polyurethanplader / Polyurethane plates

Art.	Thickness (mm)	Width (mm)	Length (mm)	Stock
38.430-5/70	5	2.000	1.000	X
38.430-5/80	5	2.000	1.000	X
38.430-8/70	8	2.000	1.000	X
38.430-8/90	8	2.000	1.000	X
38.430-10/70	10	2.000	1.000	X
38.430-10/90	10	2.000	1.000	X

Data			
Hårdhed / Hardness - Shore A	70	80	90
Forlængelse / Elongation	500	450	400
Arbejdstemperatur / Working temperature - °C	-50 +100	-50 +100	-50 +100
Tear strength - KN/m	50	30	36
Trækstyrke / Tensile strength - N/mm²	25	30	35

37.221/1G



Material: Grey
Size: 1.000 x 10.000 x 3 mm

38.14124 *

Anti slip plade. Gummigranulat.
Anti slip plate. Rubber granules.
8 x 100 x 200 mm
Min. order: 300

38.14572 *

Anti slip plade. Gummigranulat.
Anti slip plate. Rubber granules.
8 x 500 x 5000 mm
Min. order: 5 m

38.9971010 *



Græsmåtte. Grå
Grass mat. Grey
900 mm x 16 m

38.9971020 *

Græsmåtte. Grøn
Grass mat. Green
900 mm x 16 m

* **Skaffevare** / Special order item

Gummimåtter / Rubber mats

Bus mats EU Semperit
Material: NR / NBR / NR-SBR

Art.	Width (mm)	Thickness (mm)	Quality	Color	Insert
38.121N *	1.400	1	NBR	Black	0
38.121NX *	1.400	1	NBR	Black	0
38.1215N	1.400	1,5	NBR	Black	0
38.122N *	1.400	2	NBR	Black	0
38.123N *	1.400	3	NBR	Black	0
38.124N *	1.400	4	NBR	Black	0
38.125N *	1.400	5	NBR	Black	0
38.125S *	1.400	5	NBR	Black	0
38.126N *	1.400	6	NBR	Black	0
38.128N	1.400	8	NBR	Black	0
38.128NH	1.400	8	NBR	White	0
38.128S *	1.400	8	NBR	Black	0
38.130N *	1.400	10	NBR	Black	0
38.132N *	1.400	12	NBR	Black	0
38.135N *	1.400	15	NBR	Black	0
38.139N *	1.400	20	NBR	Black	0
38.1215	1.400	1,5	NR / SBR	Black	1
38.1215NH *	1.400	1,5	NR / SBR	White	1
38.122	1.400	2	NR / SBR	Black	1
38.122A *	1.400	2	NR / SBR	Black	2
38.123 *	1.400	3	NR / SBR	Black	1
38.123X *	1.400	3	NR / SBR	Black	Smooth
38.124	1.400	4	NR / SBR	Black	1
38.125 *	1.400	5	NR / SBR	Black	1
38.126 *	1.400	6	NR / SBR	Black	2
38.128 *	1.400	8	NR / SBR	Black	2
38.128SX *	1.400	8	NBR / SBR	Black	Smooth
38.130	1.400	10	NR / SBR	Black	2
38.132 *	1.400	12	NR / SBR	Black	2
38.135 *	1.400	15	NR / SBR	Black	0
38.136 *	1.400	20	NR / SBR	Black	0
38.137 *	1.400	25	NR / SBR	Black	0
38.138 *	1.400	30	NR / SBR	Black	0
38.139 *	1.400	30	NR / SBR	Black	0
38.140 *	1.400	50	NR / SNR	Black	0
38.122EPDM	1.400	2	EPDM	Black	0
38.123EPDM	1.400	3	EPDM	Black	0

Rubber cork
Material: NR / NBR / NR-SBR

Art.	Size (mm)	Thickness (mm)	Quality
38.201.5	1.000 x 1.000	1,5	1.235
38.202	1.000 x 1.000	2	1.235
38.203	1.000 x 1.000	3	1.235
38.204	1.000 x 1.000	4	1.235
38.205	1.000 x 1.000	5	1.235
38.205R *	1.060 x 13.000	5	1.235

Min. order: 4 rl.

* **Skaffevare** / Special order item

50.241NR

T-strap
Material: NR
Length: 150 mm

50.245NR

T-ladder
Material: NR
Length: 160 mm

50.245H

T-ladder
Material: White EPDM
Length: 160 mm

50.242NR

T-strap
Material: NR
Length: 250 mm

50.246NR

T-ladder
Material: NR
Length: 260 mm

50.265-10

Combi strap
Material: NR
Length: 275 x 25 mm
(10 pcs. package)

50.246-10

T-ladder
Material: NR
Length: 280 x 30 mm
(10 pcs. package)

50.265

Combi strap
Material: EPDM
Length: 280 mm

50.266

Combi strap
Material: EPDM
Length: 360 mm

50.247-10

Combi strap
Material: NR
Length: 365 x 25 mm
(10 pcs. package)

50.247NR

Combi strap
Materia: NR
Length: 380 mm

50.275

POP ladder
Material: EPDM
Length: 200 mm

50.244NR

Strap
Material: NR
Length: 260 mm

50.271



Strap
Material: EPDM
Length: 270 mm

50.276

POP ladder
Material: EPDM
Length: 275 mm

50.264-10

Strap
Material: NR
Length: 285 x 30 mm
(10 pcs. package)

Gummistropper / Rubber straps

50.264

Strap
Material: NR
Length: 290 mm

50.261

Strap
Material: EPDM
Length: 200 mm, Ø 8 mm

50.263

Strap
Material: EPDM
Length: 200 mm, Ø 7 mm

50.263K

Strap with hook
Material: NR
Length: 200 mm

50.243NR



Strap
Material: NR
Length: 260 mm

50.267NR



Strap
Material: NR
Length: 400 mm

50.267



Strap
Material: EPDM
Length: 400 mm

50.269

Ring
Material: EPDM
Length: Ø 106 mm / 86 mm

50.13621

Strap with hook and eye
Length: 20 x 490 mm

50.280

Strap with hook and eye
Length: Strop 480 mm
Total 610 mm

50.250

Ladder strap
Material: SBR
Length: 10 m

Luggage strap

Art.	Measure (mm)
79.051	600
79.051A	700
79.052	900
79.053	1.250
79.054	1.750
79.055	3.000

39.BUMPER

Type A. Sort og gul.
1.000 mm lang.
Selvklæbende.

Type A. Black and yellow.
1.000 mm long.
Adhesive.



39.BUMPERB

Type B. Sort og gul.
1.000 mm lang.
Selvklæbende.

Type B. Black and yellow.
1.000 mm long.
Adhesive.



39.BUMPERC

Type C. Sort og gul.
1.000 mm lang.
Selvklæbende.

Type C. Black and yellow.
1.000 mm long.
Adhesive.



39.BUMPERD

Type D. Sort og gul.
1.000 mm lang.
Selvklæbende.

Type D. Black and yellow.
1.000 mm long.
Adhesive.



39.BUMPERE

Type E. Sort og gul.
1.000 mm lang.
Selvklæbende.

Type E. Black and yellow.
1.000 mm long.
Adhesive.



Centraflex

Centraflex. Vandtæt stanghængsel med polyester-kerne og PVC-flanger. Tillader 180 gr. åbning. Stor styrke og høj elasticitet. Sort finish. Længde: 2000 mm.

Weather-proof continuous hinge with polyester-core and synthetic flanges. 165° opening, 28 mm face. High strength and excellent flexibility. Black finish. Length: 2000 mm.

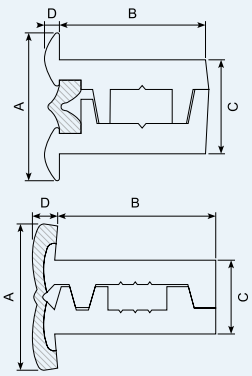

Art.	A mm	B mm	C mm	D mm	L mm
20.6020	28	23	16	4	2.000
20.6025	28	23	16	4	2.500
20.6030	28	23	16	4	3.000

Art.	A mm	B mm	C mm	D mm	L mm
20.6120	30	34	16	4,5	2.000
20.6125	30	34	16	4,5	2.500
20.6130	30	34	16	4,5	3.000

Poliall

Poliall stanghængsel, vandtæt. Med PU kerne og aluminiumsflanger. Tillader 180 gr. åbning. Forboret med 5 mm huller i flange.

Poliall rod hinge, waterproof. With PU core and aluminum flanges. Allows 180 degree opening. Pre drilled with 5 mm holes in flange.



Art.	B mm	L mm
54.261700JC-5	29	2.054
54.261700JX-5	29	2.200
54.261700JD-5	29	2.240
54.261700J-5	29	2.400
54.261720J-5	29	2.700
54.261740J-5	29	3.000
54.261760J-5	29	3.200
54.261780J-5	29	4.000

20.13002

Co-extruderet PVC-hængsel. 1.678 mm med Ø 5,3 mm forborede huller. Kun til lette opgaver.

Co-extruded PVC hinge. 1678 mm, ø 5.3 mm holes pre-drilled holes. Only for light tasks.



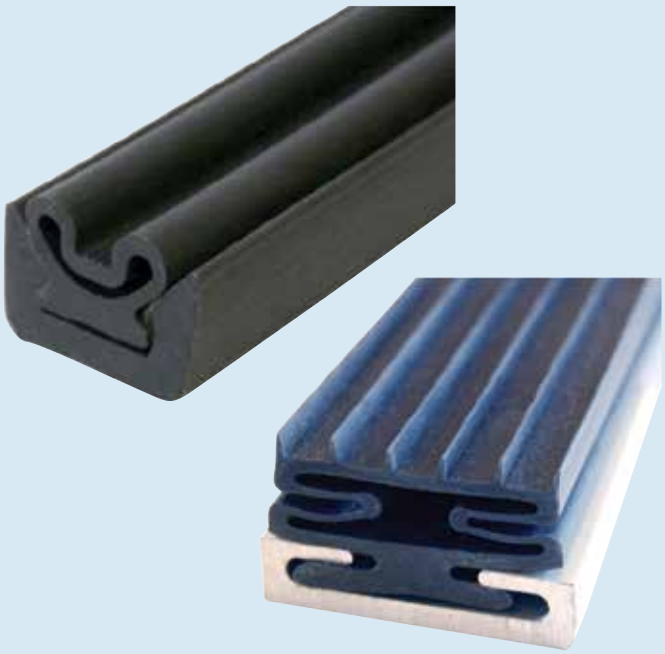

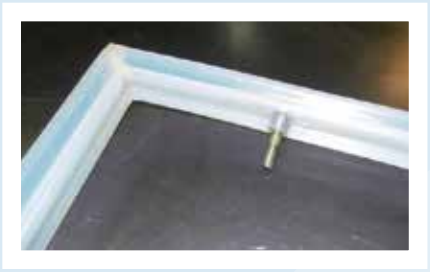

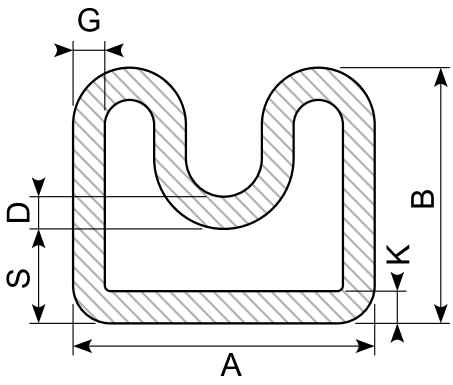

Art.	A	B	D	G	K	S	Hardness SH A
30.0192-2819 *	16	14	1,8	1,8	1,8	4,9	65
30.0192-3161 *	18	15,5	2	2	2	6	60
30.0192-3375 *	18	15,5	2	2	2	2	60
30.0192-3877 *	24	20	2,5	2,5	2,5	5	60
30.0192-4588 *	18,5	17	2	2	2	9	60
30.0192-4633 *	26	20	3	3	3	8,2	60
30.0192-4634 *	35	32	5	5	5	17,6	60
30.0192-4733 *	18,7	18/ 16,6	2	2	2	7,9	60
30.0192-4756 *	16	17	1,5	1,5	1,5	10	60
30.0192-4926 *	27	20	4	4	4	10	60
30.0192-4947 *	22	16	3	3	3	6	60
30.0192-10322 *	30	15	3	3	3	3,7	60
30.0192-10680 *	25,3	20	2,7	2,7	2,7	7,3	60
30.0192-10927 *	26,5	20	3	3	3	9	60
30.0192-10963 *	17	14	2	2	2	5	60
30.0192-11007 *	26	20	3	3	3	8,5	60
30.0192-11016 *	46	34	3	3	5	9	60
30.0192-11484 *	35	34	3	3	3	17	60
30.0192-11800 *	10	10	1,5	2	2	5	60
30.0192-12418 *	45	34	3	3	5	9	60
30.0192-12642 *	21	15	2	2	2	8	60

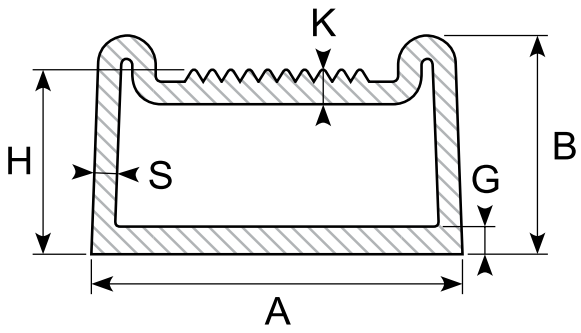

Art.	A	B	G	H	K	S	Hardness SH A
30.0192-2076 *	16	10	2	10	2,5	1	50
30.0192-2969 *	17	9,5	1,2	8	1,5	1	76
30.0192-3214 *	16	9,5	1,2	8	1,5	1	76
30.0192-3414 *	8,6	8,3	1,2	7,5	1,4	1,2	60
30.0192-3415 *	12	8,5	1,2	7,7	1,4	1,2	60
30.0192-3739 *	17	8,5	1,5	7	2	1	76
30.0192-4792 *	16	7,5	1,2	7	1,5	1	60
30.0192-4906 *	12	8	1,2	6,3	1,5	1,2	60
30.0192-10966 *	30	30,3	4	33,5	9,9	4	60
30.0192-11527 *	17	8,5	1,2	7	1,5	1	60

* **Skaffevare** / Special order item

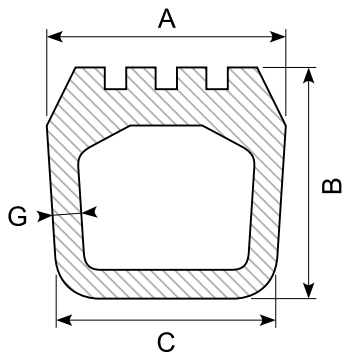

Art.	A	B	C	G	Hardness SH A
30.0192-0374 *	16	20	15	2,5	50
30.0192-0460 *	17	18	17	3,5	50
30.0192-0431 *	34	35	35	5	60
30.0192-0459 *	17	18	15	2,5	50
30.0192-1345 *	16	18	16	2,5	50
30.0192-1494 *	14	11	14	2/2,25	60
30.0192-1744 *	35	33	35	5,5	55
30.0192-1768 *	27	19	27	3,5	50
30.0192-1881 *	36	26,9	36	5	55
30.0192-1949 *	17,5	20	17,5	3	45
30.0192-2029 *	14	14	15,5	2,5	50
30.0192-2067 *	16,5	16	15	2	55
30.0192-2364 *	35	32	35	5	60
30.0192-2408 *	16,5	13	16,5	2,5	55
30.0192-2845 *	14	11	13	2	60
30.0192-3365 *	14	10	14	2	60
30.0192-3497 *	27,5	25	27,5	3	60
30.0192-3551 *	33,5	32	35	5	60
30.0192-3588 *	16	14	16	2	60
30.0192-3616 *	15,5	18	15,5	2	60
30.0192-3693 *	53	41,5	53	5	60
30.0192-3845 *	35	32	35	4	60
30.0192-3900 *	35	32	35	5	60
30.0192-4626 *	34	25	34	5	60
30.0192-4690 *	35	32	35	4,5	60
30.0192-4973 *	15,2	13,6	16,2	2	55
30.0192-10142 *	16	12	16	2,5	60
30.0192-10318 *	35	31	35	4,5	65
30.0192-10358 *	21	24	21	3	60
30.0192-10389 *	16	12	16	2	60
30.0192-10519 *	16	12	16	2	60
30.0192-10947 *	35	32	35	3,3	55
30.0192-11093 *	13,6	10	13,6	2	55
30.0192-11137 *	14	14	14	3	60
30.0192-11278 *	17	9	17	2	55
30.0192-11342 *	32,5	32	35	5	60
30.0192-11385 *	33,5	30	35	5	60
30.0192-11550 *	34	35	35	5	70
30.0192-11937 *	22	20	22	3	60
30.0192-11991 *	33,7	32	33,7	5	60
30.0192-12300 *	35	31,5	35	5	60
30.0192-12398 *	35	35	35	4,3	60
30.0192-12442 *	14	10	14	1,7	50
30.0192-12465 *	35	33	35	4	60

* **Skaffevare** / Special order item

Ventil eksempel / Valve example

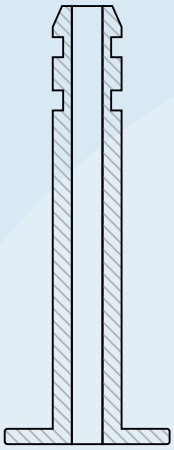

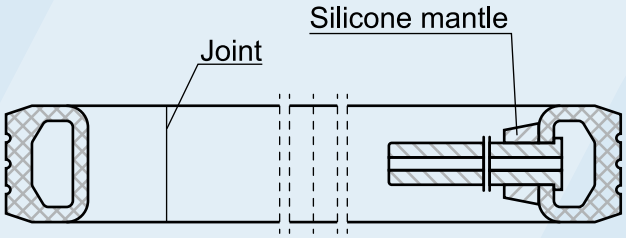

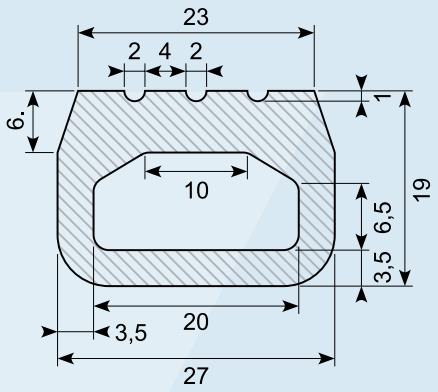

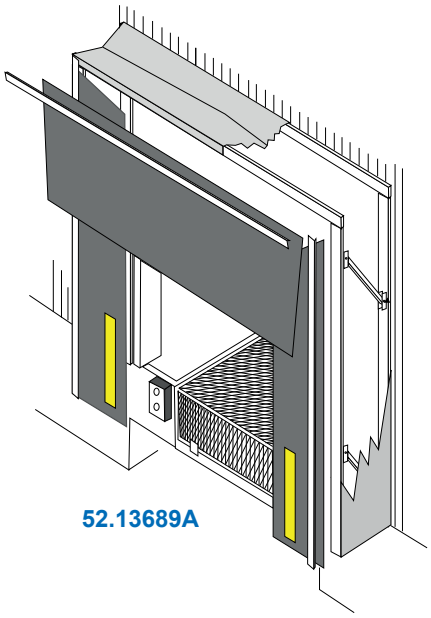

52.13689A

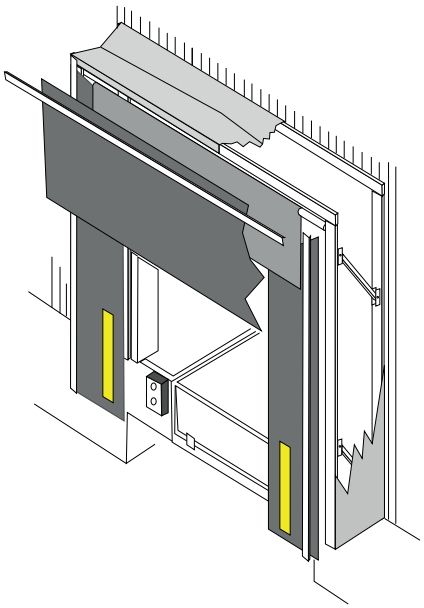

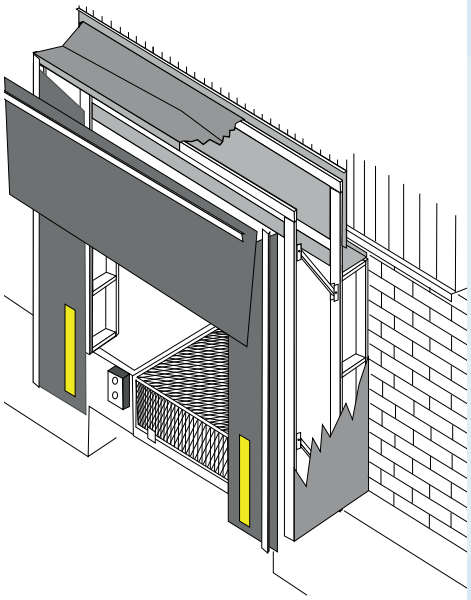

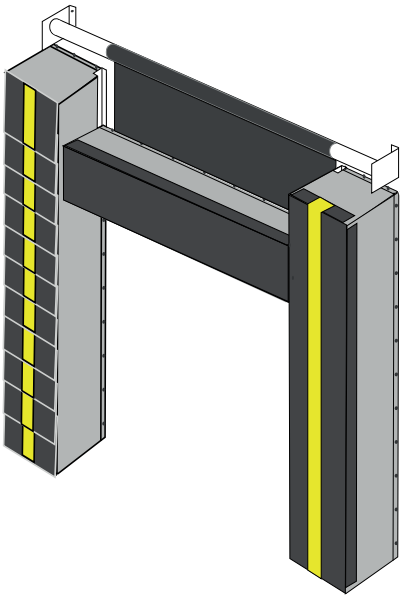

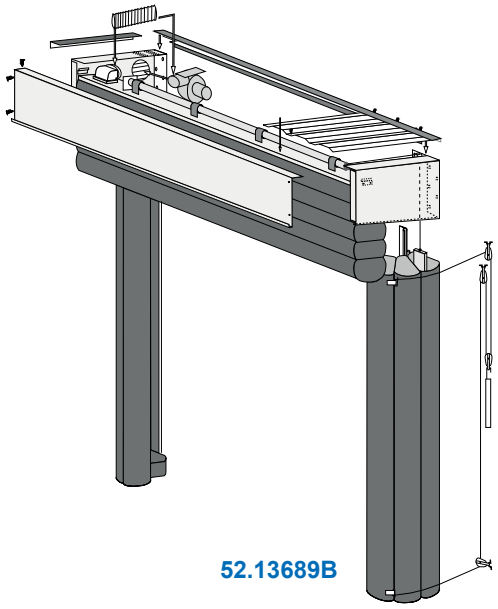

52.13689B

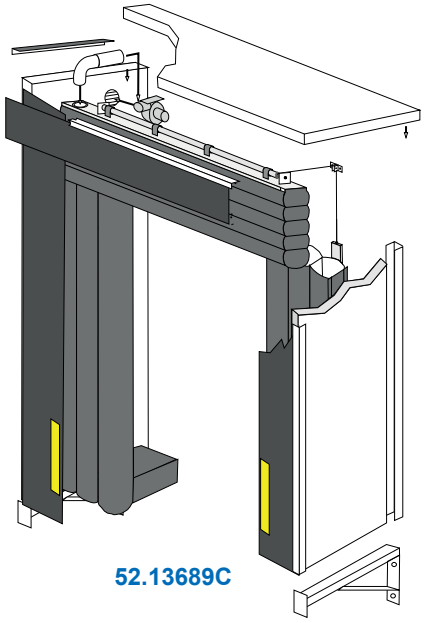

52.13689C

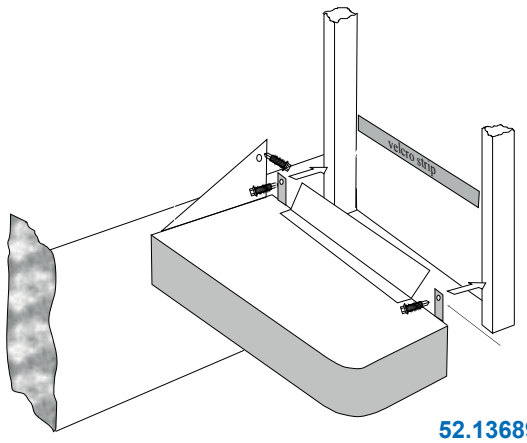

52.13689-5

39.1501 *

Front plate
440 x 250 x 62 mm
Weight: 16 kg
For buffer 39.642X

39.1502 *

Front plate
415 x 215 x 62 mm
Weight: 14 kg
For buffer 39.643X

39.1503 *

Back plate for welding
450 x 250 x 15 mm
Weight: 15 kg

39.1504 *

Back plate galvanized
450 x 250 x 15 mm
Weight: 15 kg

39.1505 *

Packer
450 x 250 x 10 mm
Weight: 1,3 kg
Rubber spacer

39.1506 *

Packer
450 x 250 x 15 mm
Weight: 2,3 kg
Rubber spacer
Holes as an option

39.1507 *

Packer
450 x 250 x 20 mm
Weight: 2,8 kg
Rubber spacer
Holes as an option

39.1508 *

Packer
450 x 250 x 50 mm
Weight: 5,5 kg
Rubber spacer

39.1509 *

Dock bumper accessory
450 x 250 x 100 mm
Weight: 10 kg
Buffer for PE plate

39.1510 *

Front plate. Hardwearing PE
410 x 210 x 35 mm
Weight: 2,5 kg

39.1511 *

Dock bumper accessory
250 x 150 x 150 mm
Weight: 8,1 kg
For mount of buffer 150 mm over ramp level

39.1512 *

Dock bumper accessory
250 x 250 x 150 mm
Weight: 12 kg
For mount of buffer 150 mm over ramp level

39.1513 *

Front plate
440 x 440 x 62 mm
Weight: 13,5 kg

39.1514 *

Packer
450 x 450 x 15 mm
Weight: 2,3 kg
Rubber spacer for 39.651A

39.1515 *

Dock bumper accessory
1.470 x 540 (max.) x 100 mm (min.)
Weight: 12 kg
Toe protection

* **Skaffevare** / Special order item

39.1616 *

Packer
750 x 250 x 15 mm
Weight: 3,6 kg
Rubber spacer

39.1617 *

Packer
750 x 250 x 20 mm
Weight: 10,5 kg
Rubber spacer

39.1618 *

Packer
750 x 250 x 50 mm
Weight: 10,5 kg
Rubber spacer

39.1819 *

Front plate
732 x 250 x 62 mm
Weight: 26 kg
For buffer 39.649

39.1620 *

Back plate for welding
750 x 250 x 15 mm
Weight: 24 kg

39.1621 *

Back plate. Galvanized
750 x 250 x 15 mm
Weight: 24 kg

39.1622

Back plate for 450 mm buffer
720 x 250 x 66 mm
Weight: 32 kg
Spring loaded. Follows the truck when loading.

39.1623 *

Back plate for 750 mm buffer
965 x 250 x 66 mm
Weight: 47 kg
Spring loaded. Follows the truck when loading.

39.1624 *

Dock bumper accessory
750 x 250 x 100 mm
Weight: 17 kg
Buffer for PE plate

39.1625 *

Front plate. Hardwearing PE.
710 x 210 x 35 mm
Weight: 4,5 kg

39.654 *

Dock bumper L
750 x 400 x 100 mm
Weight: 36 kg

39.655 *

Dock bumper L
750 x 400 x 100 mm
Weight: 36 kg

39.1626 *

Front plate. Galvanized
750 x 400 x 100 mm
Weight: 36 kg

39.1627 *

Front plate. Galvanized
750 x 400 x 100 mm
Weight: 36 kg

39.1628 *

Back plate. Galvanized
750 x 400 x 100 mm
Weight: 34 kg

39.1629 *

Back plate. Galvanized
750 x 400 x 100 mm
Weight: 34 kg

* **Skaffevare** / Special order item

39.1630 *

Front plate. Hardwearing rubber
448 x 248 x 50 mm
Weight: 7 kg

39.1631 *

Front plate. Hardwearing PE
450 x 250 x 50 mm
Weight: 5 kg

39.1632 *

Back plate. Galvanized
450 x 250 x 60 mm
Weight: 11 kg
Remember rubber spacer

39.1633 *

Back plate. Galvanized
470 x 270 x 120 mm
Weight: 21 kg
Remember rubber spacer

39.1634 *

Front plate. Hardwearing rubber
750 x 250 x 50 mm
Weight: 12 kg
Alternative to 39.1635

39.1635 *

Front plate. Hardwearing PE
750 x 250 x 50 mm
Weight: 8 kg

39.1636 *

Back plate. Galvanized
770 x 270 x 80 mm
Weight: 26 kg
Remember rubber spacer

39.1637 *

Back plate. Galvanized
770 x 270 x 120 mm
Weight: 34 kg
Remember rubber spacer

39.1638 *

Trailer plate
1.000 x 1.000 x 2,5 mm
Weight: 26,5 kg
To protect the concrete in front of loading ramp

39.1639 *

Trailer plate PE
1.000 x 1.000 x 20 mm
Weight: 18,5 kg

39.1640 *



Wheel guide
Ø165 mm, 5 mm, 300 mm depth.
Mounting plate: 250 x 250 x 10 mm.
Weight: 8,5 kg

39.1641 *



Wheel guide
Ø165 mm, 5 mm, 2.085 x 250 x 365 mm.
Color: Yellow RAL 1028
Weight: 90 kg

39.1642 *

Wheel guide
Ø165 mm, 5 mm, 2.070 x 600 x 365 mm. Yellow RAL 1028.
Weight: 90 kg
Con be ordered in hot-dipped.

39.1643 *

Wheel guide
2.070 x 250 x 200 mm
Color: Yellow RAL 1028
Weight: 78 kg

39.1644 *

Wheel guide. Hot dipped.
Ø165 mm, 5 mm, 3.000 x 600 x 365 mm

* **Skaffevare** / Special order item

S10.3301

Dolphin knife

S10.3303



10 pcs. blades for S10.3301

S10.3311

Utility knife

S10.3313

10 pcs. blades for S10.3311

S10.3312

Utility knife

S10.3314

10 pcs. blades for S10.3312

83.842

Profile cutter

84.930

Tool set for inserting filler sections in glazing sections. Eyelet Ø 9,5 mm.

84.931

Tool for filler sections

84.932T

Tool for glazing sections with wooden handle

84.934X

7 mm eyelet for 84.931

84.934



9,5 mm eyelet for 84.931

84.935



10,5 mm eyelet for 84.931

84.840084

Cold cut knife

84.961

Cold cut knife blade for 84.840084.
19 mm.
84.961A: 25 mm
84.961B: 35 mm

87.705l

Terokal 2444, 340 g
Excellent contact adhesive, based on CR, for rubber/rubber - and rubber/metal bonding.

87.727

Terokal 914, 680 g
Transparent contact adhesive, based on NBR. Very good for PVC.

87.082020

Cyanoacrylate adhesive
20 g

87.770/10

Loctite 770(7239), 10 g
Primer which improves the adhesion on materials which are difficult to glue e.g. thermoplastic rubber types. Is to be used together with Loctite 401 / 406 / 431 / 454 or 4850

87.1034

Sicomet 50, 3 g
Excellent for EPDM

87.1035

Sicomet 8300, 20 g
Excellent for sponge rubber

87.1739

Terodicht Elastik, 310 ml
IK sealant, based on synthetic rubber - black

87.1738

Terodicht schwartz, 310 ml
IK sealant, based on buthyl rubber - grey

87.2000

Dual component adhesive.
Total weight: 1 kg

87.52759

Terostat 2759, 310 ml.
Easy to dab off. IK sealant, based on buthyl rubber. Grey.
87.52759X: 570 ml

87.51989

Terostat 930, sort 310 ml.
87.51999F: 570 ml

87.723

Spray glue. Loctite 3923.

30.shore20-90

Shore samples with logo.
Silicone rubber.

30.shoreA

Shore A hårdhedsmåler
Shore A hardness tester

30.shoreD

Shore D hårdhedsmåler
Shore D hardness tester

Dimensional tolerances for moulded, extruded and calendered solid rubber products.
(GB/T 3672-92) ISO3302-1998

Rubber thickness (mm)	E1 ± (mm)	E2 ± (mm)	E3 ± (mm)
0 - 1,5	0,15	0,25	0,4
1,5 - 2,5	0,2	0,35	0,5
2,5 - 4	0,25	0,4	0,65
4 - 6,3	0,35	0,5	0,8
6,3 - 10	0,4	0,65	1
10 - 16	0,5	0,8	1,3
16 - 25	0,65	1	1,6
25 - 40	0,8	1,3	2
40 - 63	1	1,6	2,5
63 - 100	1,3	2	3,2

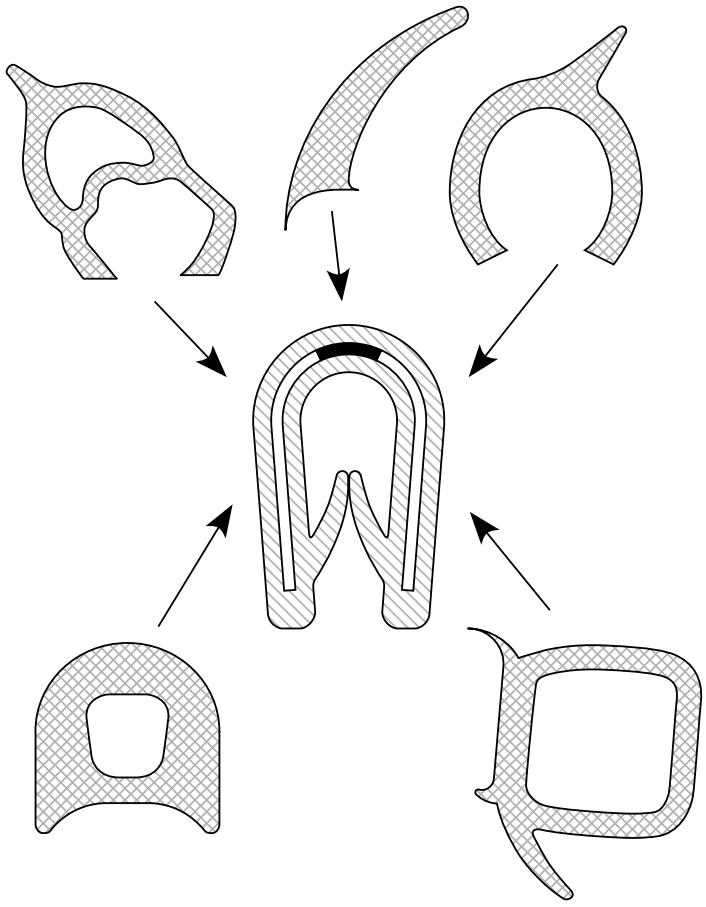

Edge trims

Configure your own edge trim or choose from the 2.000 different we have in stock.

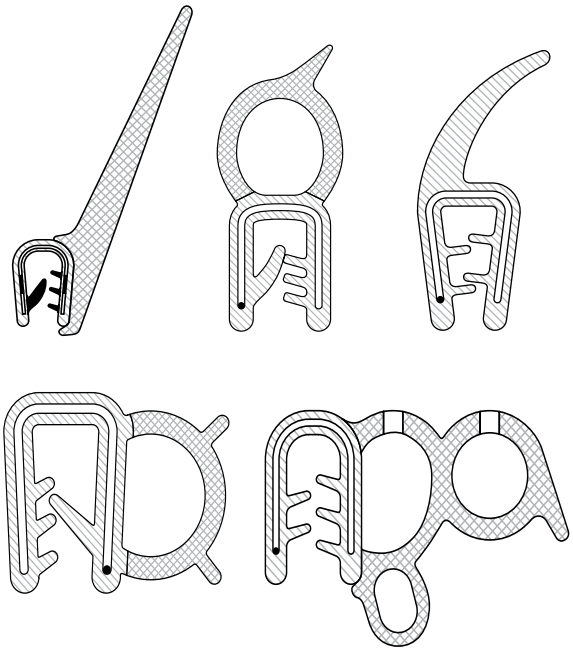

Varenummerindex / product number index

Vare Art.	Side Page
20.13002	98
20.6020	98
20.6025	98
20.6030	98
20.6120	98
20.6125	98
20.6130	98
30.0192-0374	100
30.0192-0431	100
30.0192-0459	100
30.0192-0460	100
30.0192-10142	100
30.0192-10318	100
30.0192-10322	99
30.0192-10358	100
30.0192-10389	100
30.0192-10519	100
30.0192-10680	99
30.0192-10927	99
30.0192-10947	100
30.0192-10963	99
30.0192-10966	99
30.0192-11007	99
30.0192-11016	99
30.0192-11093	100
30.0192-11137	100
30.0192-11278	100
30.0192-11342	100
30.0192-11385	100
30.0192-11484	99
30.0192-11527	99
30.0192-11550	100
30.0192-11800	99
30.0192-11937	100
30.0192-11991	100
30.0192-12300	100
30.0192-12398	100
30.0192-12418	99
30.0192-12442	100
30.0192-12465	100
30.0192-12642	99
30.0192-1345	100
30.0192-1494	100
30.0192-1744	100
30.0192-1768	100
30.0192-1881	100
30.0192-1949	100
30.0192-2029	100
30.0192-2067	100
30.0192-2076	99
30.0192-2364	100
30.0192-2408	100
30.0192-2819	99
30.0192-2845	100
30.0192-2969	99
30.0192-3161	99
30.0192-3214	99
30.0192-3365	100
30.0192-3375	99
30.0192-3414	99
30.0192-3415	99
30.0192-3497	100
30.0192-3551	100
30.0192-3588	100
30.0192-3616	100
30.0192-3693	100
30.0192-3739	99
30.0192-3845	100
30.0192-3877	99
30.0192-3900	100
30.0192-4588	99
30.0192-4626	100
30.0192-4633	99
30.0192-4634	99
30.0192-4690	100
30.0192-4733	99
30.0192-4756	99
30.0192-4792	99
30.0192-4906	99
30.0192-4926	99
30.0192-4947	99
30.0192-4973	100
30.10036	28
30.101.25	18
30.101.5	18
30.101	18
30.102	18
30.102E	18
30.103.5CR	18
30.103.5NBR	18
30.103CR	18
30.103E	18
30.103NBR	18
30.103SIH	18
30.104.5CR	18
30.104.5E	18
30.104.5NBR	18
30.10461-2	27
30.10485	27
30.104CR	18
30.104E	18
30.104NBR	18
30.104SIH	18
30.105.3CR	18
30.105.3NBR	18
30.105.7CR	18
30.105.7NBR	18
30.105CR	18
30.105E	18
30.105NBR	18
30.106.5CR	18
30.106.5NBR	18
30.106CR	18
30.106E	18
30.106NBR	18
30.106SIH	18
30.107.5CR	18
30.107.5NBR	18
30.10777-1	35
30.107CR	18
30.107E	18
30.107NBR	18
30.108.4CR	18
30.108.4NBR	18
30.108CR	18
30.108E	18
30.108NBR	18
30.108SIH	18
30.109.5CR	18
30.109.5NBR	18
30.109CR	18
30.109E	18
30.109NBR	18
30.110CR	18
30.110E	18
30.110NBR	18
30.111CR	18
30.111NBR	18
30.112CR	18
30.112E	18
30.112NBR	18
30.113CR	18
30.113E	18
30.113NBR	18
30.11459	34
30.114CR	18
30.114E	18
30.114NBR	18
30.115CR	18
30.115E	18
30.116CR	18
30.116E	18
30.116NBR	18
30.11774	35
30.117E	18
30.118CR	18
30.118E	18
30.118NBR	18
30.11905	26
30.11911	36
30.119E	18
30.120CR	18
30.120E	18
30.120NBR	18
30.121E	18
30.122CR	18
30.122E	18
30.122NBR	18
30.124E	18
30.12553-2	24
30.125CR	18
30.125E	18
30.125NBR	18
30.12759	19
30.12896	35
30.12932-1	35
30.12932-2	26
30.12932-3	19
30.12932-4	19
30.12957-1	20
30.12957-2	20
30.12957-3	21
30.13049-1	27
30.13049-2	27
30.13049-4	27
30.13049-5	27
30.13062	26
30.13066	78
30.13086	33
30.130CR	18
30.130NBR	18
30.13144	49
30.13186-1	64
30.13186-2	64
30.13186-3	64
30.13186-4	64
30.13186-5	64
30.13186-6	64
30.13186-7	64
30.13186-8	64
30.13242	28
30.132CR	18
30.132NBR	18
30.13315	49
30.13421	23
30.13447-8	25
30.13503	28
30.13535	35
30.135E	18
30.136/45	38
30.136	38
30.136NBR	38
30.13796	27
30.13841	23
30.1386	34
30.138NBR	38
30.138S	38
30.140	38
30.14053	23
30.14098-2	21
30.140CR	18
30.140NBR	18
30.141	25
30.14130	24
30.14163-1	25
30.14163	25
30.14227	36
30.142S	25
30.14356	36
30.144	25
30.14507-1	34
30.14507-2	34
30.14507-3	36
30.145	25
30.145W	25
30.14803	78
30.148S	38
30.16239	28
30.16688	26
30.16977	27
30.174S	38
30.176	38
30.180	39
30.182	38
30.190	24
30.21101205	36
30.2151	21
30.2151S	21
30.216S	19
30.218S	19
30.220L	19
30.22381	38
30.23464	19
30.2438	25
30.2449	35
30.2455	35
30.2566	21
30.257S	22
30.258	22
30.262S	19
30.2653	22
30.29168	19
30.29300-129	26
30.29300-130	26
30.2984-1	36
30.2984-2	36
30.2984-3	36
30.2984-5	36
30.2984-6	36
30.313	23
30.314S	23
30.315S	23
30.315SB	23
30.324S	21
30.324SB	21
30.325X	21
30.331	20
30.333	20
30.340	25
30.4437	25
30.4469	27
30.50967	23
30.5179	25
30.5550M	22
30.5560	22
30.5596	27
30.5881	21
30.5981	22
30.600	19
30.601	19
30.602	19
30.6487	39
30.6622	34
30.6622N	34
30.6648	21
30.6724	34
30.6759	22
30.6944	22
30.7106	23
30.7249	26
30.7266	26
30.7300/4	22
30.7300/4Y	22
30.7300	22
30.7367	19
30.7408X	38
30.7411	26
30.7507	27
30.7508	35
30.7509	35
30.7519	36
30.7519NBR	36
30.7559	23
30.7613	23
30.762	26
30.7645	23
30.7648	23
30.7649-12	21
30.7649-8	21
30.7649	21
30.7650	21
30.7651	23
30.7652	20
30.7663	25
30.7696	19
30.7770	22
30.7780/4	22
30.7811	26
30.7845	27
30.7853X	20
30.7932	20
30.7933	20
30.7935	20
30.798	25
30.7987	35
30.8199	22
30.8199W	22
30.8270	24
30.8331	25
30.8439	40
30.8469	20
30.8538	39
30.8538B	39
30.9215	28
30.9387-1	28
30.9387-2	27
30.9437-100	29
30.9437-125	29
30.9437-160	29
30.9437-200	29
30.9437-250	29
30.9437-315	29
30.9437-400	29
30.9437-500	29
30.9519	35
30.9548	33
30.9691-2	19
30.9691-3	21
30.9691-5	19
30.9826-1	28
30.9826-2	28
30.9884S	49
30.9884X	37
30.9885	37
30.9906	63
30.9996-10	20
30.9996-4	28
30.9996-5	28
30.9996-6	28
30.A018615	19
30.A02005	19
30.A02505	19
30.A03006	19
30.A03305	19
30.A03310	19
30.A05005	19
30.A05010	19
30.A05808	19
30.A06705	19
30.A06710	19
30.A07505	19
30.A10005	19
30.A10010	19
30.OT0136	35
30.OT101	38
30.OT1024	19
30.OT1024B	19
30.OT1057	38
30.OT1081	39
30.OT1092	27
30.OT1387	24
30.OT2036	38
30.OT3271	39
30.OT3272	24
30.OT3334	39
30.OT3354	23
30.OT3394	33
30.OT3440	35
30.shore20-90	106
30.shoreA	106
30.shoreD	106
30.SM251	39
30.WI660	19
30.WI747	19
31.018S	33
31.018X	33
31.021S	33
31.022S	33
31.025S	33
31.035S	37
31.036SI-LTC	37
31.036SI	37
31.037	37
31.037SI	37
31.038SI	37
31.041S	33
31.042S	33
31.043S	34
31.047	33
31.048	36
31.050	36
31.060S	33
31.061S	34
31.063	33
31.064	34
31.065S	34
31.066	34
31.068S	34
31.070S	35
31.071S	35
31.072	26
31.074S	35
31.112S	42
31.116S	42
31.145S	42
31.148	42
31.155	42
31.216GS	34
31.216ST	34
31.365	42
31.369	24
31.4281	58
31.6701	42
31.6702	42
31.6703	42
31.702	27
31.OT2179	39
32.009S	43
32.010	43
32.016S	40
32.034S	40
32.036S	40
32.036X	40
32.044S	40
32.046S	40
32.047	40
32.057	41
32.064S	41
32.066	41
32.075	41
32.095S	41
32.1024S	40
32.1025S	40
32.1025SK	40
32.1037S	41
32.1045S	41
32.1045SK	40
32.1301	43
32.1640	41
32.165	41
32.2024CR	40
32.2024M	40
32.2045M	40
32.255S	41
32.300X	43
32.301	43
32.301X	43
32.309X	43
32.409	43
32.409X	43
32.512	41
32.514S	41
32.516S	41
32.523S	41
32.527	41
32.7125	42

Vare / Art.	Side / Page
32.7195S	42
32.754S	41
32.795S	42
32.8516	24
32.8517	24
32.8518	24
32.8518W	24
32.8519	24
32.8520	24
32.866	42
32.924	40
32.924K	43
33.000	13
33.003	2
33.019	11
33.020	10
33.021	5
33.022	10
33.024	9
33.025	7
33.026	13
33.094X	3
33.1153A	3
33.1153GA	3
33.1154	4
33.1155	4
33.1156	4
33.12116	10
33.200POM	16
33.201POM	16
33.202POM	16
33.203POM	16
33.210POM	16
33.211POM	16
33.212POM	16
33.213POM	17
33.214POM	17
33.215POM	17
33.216POM	16
33.217POM	16
33.218POM	16
33.220POM	17
33.221POM	17
33.306	2
33.307A	2
33.308A	2
33.308POM	16
33.309XM	2
33.310SS-316	2
33.310SS	2
33.310X	2
33.311	14
33.312	14
33.319	9
33.319F	9
33.320	11
33.321	9
33.323	9
33.324CR	9
33.326	11
33.328	10
33.331	11
33.332B	10
33.332X	10
33.333	10
33.335	10
33.336	9
33.338	9
33.338F	9
33.339X	10
33.340	10
33.352	6
33.353	5
33.353NBR	5
33.353S	5
33.353X	6
33.354	4
33.355B	7
33.357X	6
33.358B	5
33.358C	5
33.358X	5
33.359X	6
33.360	6
33.360F	6
33.360NBR	6
33.360R	7
33.360X	6
33.361	6
33.361B	6
33.362	7
33.362A	6
33.362B	6
33.362C	7
33.362D	7
33.362E	7
33.362F	7
33.362FX	6
33.365X	6
33.367	7
33.368	4
33.369	5
33.370NBR	5
33.371A	5
33.371E	5
33.371F	5
33.371FX	5
33.371X	5
33.372X	8
33.374	7
33.375	7
33.376	6
33.377	6
33.378	7
33.379	7
33.380	7
33.381	8
33.382	12
33.383	13
33.384	13
33.385	13
33.395A	8
33.395F	8
33.395X	8
33.396	8
33.398	8
33.401G	2
33.403	8
33.403F	8
33.404	8
33.405	8
33.407X	8
33.408X	7
33.409	2
33.409F	2
33.409POM	16
33.410X	2
33.410XG	2
33.411	3
33.411A	3
33.415	3
33.416	78
33.417TPE	17
33.418SS	2
33.418X	3
33.419	3
33.419A	3
33.419A	3
33.420F	3
33.420FX	3
33.420X	2
33.422	2
33.423	3
33.424	17
33.424TPE	17
33.425G	3
33.426	4
33.426A	4
33.426G	4
33.426GA	4
33.426X	4
33.426XA	4
33.427X	3
33.428	4
33.428G	4
33.429	14
33.431A	14
33.432	2
33.433	4
33.434	3
33.436	13
33.438	2
33.439A	13
33.442	13
33.443	13
33.443X	13
33.444A	8
33.444X	9
33.447	11
33.449	9
33.450NBR	9
33.451E	10
33.452R	9
33.452X	11
33.453X	10
33.454X	10
33.455	11
33.456	10
33.456F	11
33.457	9
33.457S-4	10
33.457S-6	9
33.457ST	9
33.458A	11
33.458X	11
33.459B	12
33.459C	12
33.459P	12
33.459X	12
33.460-2	12
33.460-2C	12
33.460-2F	12
33.460-4	12
33.460-6	12
33.460-6A	12
33.462	13
33.462R	13
33.463	7
33.464	11
33.465B	11
33.465C	11
33.465X	11
33.466	13
33.467	13
33.468B	4
33.468F	4
33.468X	4
33.469X	5
33.470	10
33.471	12
33.472	12
33.473	13
33.474	13
33.475	12
33.478	11
33.479	11
33.480	8
33.481	5
33.482	12
33.483	12
33.506	8
33.510	14
33.511	14
33.512	14
33.513	14
33.514	14
33.515	14
33.516	14
33.517	14
33.518	14
33.519	14
33.520	14
33.521	14
33.522	15
33.523	15
33.524	15
33.525	15
33.526	15
33.527	15
33.528	15
33.529	15
33.530	15
33.531	15
33.532	15
33.611	77
33.613	77
33.615	77
33.621	77
33.623	77
33.624	78
33.625	78
33.670	77
33.671	77
33.672	77
33.673	77
33.674	78
33.675	78
33.676	78
33.9779	8
34.018	33
34.018X	33
34.031	33
34.031X	33
34.035	34
34.117/6	36
34.14334X	33
34.3011	54
34.3020	54
34.3032	53
34.3546	26
34.601	53
34.601G	53
34.602	53
34.602G	53
34.603	53
34.603G	53
34.604	53
34.606	55
34.606X	55
34.607	55
34.607X	55
34.608	55
34.608X	55
34.609X	55
34.613	53
34.614	53
34.620010	53
34.620040	53
34.620140	54
34.620210	53
34.62039	54
34.62040	54
34.62041	54
34.620420	54
34.62105	53
34.62110	54
34.624	54
34.625	54
34.62610S	54
34.626	54
34.62713H	55
34.62713S	55
34.636	54
34.637	54
34.641	53
34.643	53
34.644	53
34.676S	55
34.677	55
34.678	55
34.7102-50	53
34.7196	53
34.7199	54
34.7514	54
34.7528-2	26
34.7528-2H	26
35.0806	45
35.0806K	45
35.0808K	45
35.10020K	45
35.1003	45
35.1003K	45
35.1004	45
35.1004K	45
35.1005	45
35.1005K	45
35.1007	45
35.1007K	45
35.1008	45
35.1008K	45
35.1010	45
35.1010K	45
35.1203	45
35.1203K	45
35.1204K	45
35.1204KL	45
35.1206K	45
35.1208K	45
35.1209	45
35.1209K	45
35.1212	45
35.1212K	45
35.1503	45
35.1503K	45
35.1504K	45
35.1505K	45
35.1506K	45
35.1507	45
35.1507K	45
35.1510	45
35.1510K	45
35.1512	45
35.1512K	45
35.1515	45
35.1515K	45
35.1605	45
35.1605K	45
35.1608	45
35.1608K	45
35.1708K	45
35.1803K	45
35.18053	45
35.18053K	45
35.1809K	45
35.1904K	45
35.2003	45
35.2003K	45
35.2005	45
35.20055	45
35.20055K	45
35.2005K	45
35.2010	45
35.2010K	45
35.2010KL	45
35.2012	45
35.2012K	45
35.2015	45
35.2015K	45
35.2018	45
35.2020	45
35.2020K	45
35.2207K	45
35.2502	45
35.2505	45
35.2505K	45
35.2506	45
35.2506K	45
35.2508K	45
35.2510	45
35.2510K	45
35.2515	45
35.2515K	45
35.2520	45
35.2520K	45
35.2525	45
35.2525K	45
35.2806K	45
35.3003K	45
35.3005	45
35.3005K	45
35.3006K	45
35.3007	45
35.3007K	45
35.3010	45
35.3010K	45
35.3012	45
35.3012K	45
35.3015	45
35.3015K	45
35.3020	45
35.3020K	45
35.3025	45
35.3025K	45
35.3030	45
35.3030K	45
35.3505	45
35.3505K	45
35.3510	45
35.3510K	45
35.3535	45
35.3535K	45
35.4003K	45
35.4005	45
35.4005K	45
35.4010	45
35.4010K	45
35.4012K	45
35.4020	45
35.4020K	45
35.4030	45
35.4030K	45
35.4035	45
35.4035K	45
35.4040	45
35.4040K	45
35.4505	45
35.4505K	45
35.5005	45
35.5006	45
35.5006K	45
35.5010	45
35.5010E	45
35.5010K	45
35.5020K	45
35.6002K	45
35.6010	45
35.6040	45
35.8020K	45
36.0505	46
36.0806	46
36.1003	46
36.1003SIH	46
36.1005	46
36.1005G	46
36.1005X	47
36.1006SIH	46
36.1007	46
36.1007X	47
36.1008	46
36.1010	46
36.1010CR	47
36.1010E	46
36.1010SIH	46
36.1010X	47
36.102.5	44
36.102	44
36.1025E	44
36.102E	44
36.103	44
36.1035E	44
36.103CR	44
36.103E	44
36.104	44
36.1045E	44
36.104CR	44
36.105CR	44

Varenummerindex / product number index

Vare Art.	Side Page
36.105E	44
36.106	44
36.106CR	44
36.106E	44
36.106EG	44
36.106ESP	44
36.107CR	44
36.107E	44
36.108	44
36.108CR	44
36.108E	44
36.108EG	44
36.109E	44
36.110	44
36.110CR	44
36.110E	44
36.111E	44
36.112	44
36.112CR	44
36.112E	44
36.112EG	44
36.115	44
36.115CR	44
36.117E	44
36.118CR	44
36.119CR	44
36.120	44
36.1205	46
36.1206	46
36.120CR	44
36.120E	44
36.1210	46
36.1210E	46
36.1210X	47
36.1212SIH	46
36.1212X	47
36.122CR	44
36.122E	44
36.12511X	47
36.125	44
36.125E	44
36.130	44
36.130EX	44
36.135E	44
36.14044	49
36.1406X	47
36.1503	46
36.1503E	46
36.1505E	46
36.1505SIH	46
36.1505X	47
36.1507X	47
36.1510	46
36.1510E	46
36.1512	46
36.1512E	46
36.1512SIH	46
36.1515	46
36.1604	46
36.1605	46
36.1610SIH	46
36.1612E	46
36.1612X	47
36.1616SIH	46
36.1808G	46
36.1812SIH	46
36.1815EG	46
36.1816	46
36.197	45
36.198	45
36.198A	45
36.198CR	45
36.198S	45
36.199	45
36.2002	46
36.2003	46
36.2003SIH	46
36.200	45
36.2005	46
36.2005SIH	46
36.2005X	47
36.2008X	47
36.2010	46
36.2010CR	47
36.2010E	46
36.2010SIH	46
36.2010SIHK	46
36.2010SIS	46
36.2010X	47
36.2015	46
36.2015SIH	46
36.2020	46
36.2020CR	47
36.2020SIH	46
36.202	45
36.208	45
36.2318X	47
36.2503	46
36.2505	46
36.2505X	47
36.2507X	47
36.2508X	47
36.2510	46
36.2510E	46
36.2510SIH	46
36.2512X	47
36.2515	46
36.2515SIH	46
36.2520	46
36.2520E	46
36.2520SIH	46
36.2520SIS	46
36.2525	46
36.2525E	46
36.2525SIH	46
36.3003	46
36.3005	46
36.3005X	47
36.3010	46
36.3010E	46
36.3010SIH	46
36.3015	46
36.3015CR	47
36.3015X	47
36.3020	46
36.3020SIH	46
36.3020X	47
36.3025E	46
36.3030	46
36.3314	45
36.3315	49
36.3351	49
36.3354	49
36.34155105	44
36.3416068	44
36.341840	44
36.342026	44
36.342030	44
36.342226	44
36.342232	44
36.342433	44
36.342529	44
36.342840	44
36.344511	44
36.3504	49
36.3515X	47
36.3516	46
36.3520E	46
36.3520X	47
36.3704	49
36.3813	49
36.3881	49
36.3897	49
36.4010	46
36.4010E	46
36.4010X	47
36.4012	46
36.4012SIH	46
36.4015	46
36.4015E	46
36.4020CR	47
36.4020E	46
36.4020X	47
36.4025	46
36.4025E	46
36.4030E	46
36.5005CR	47
36.5005SIH	46
36.5010	46
36.5010X	47
36.5020	46
36.5020E	46
36.5025	46
36.5030	46
36.6020NBR	47
36.6030	46
36.6030E	46
36.60403	52
36.60404	52
36.60405	52
36.60503	52
36.60505	52
36.60605	52
36.60802	52
36.60802CR	52
36.60803	52
36.60804	52
36.60804CR	52
36.60805	52
36.60808	52
36.60808CR	52
36.61001	52
36.61002	52
36.61003	52
36.61003CR	52
36.61004	52
36.61005	52
36.61008	52
36.61010	52
36.61010CR	52
36.61203	52
36.61204	52
36.61205	52
36.61310	52
36.61502	52
36.61503	52
36.61505	52
36.61506	52
36.61508	52
36.61510	52
36.61512	52
36.61518	52
36.61530	52
36.61603	52
36.61609CR	52
36.61710	52
36.61808	52
36.62002	52
36.62003	52
36.62004	52
36.62004CR	52
36.62005	52
36.62008	52
36.62010	52
36.62305	52
36.62502	52
36.62506	52
36.62510	52
36.62525	52
36.63005	52
36.63005CR-5952	52
36.63010	52
36.63012	52
36.63030CR	52
36.63204CR	52
36.64003	52
36.64005	52
36.64005CR	52
36.64010	52
36.64015	52
36.65003	52
36.65005CR-5952	52
36.65005CR	52
36.65007CR	52
36.65010	52
36.6600.4X	52
36.66004	52
36.67502	52
36.68005CR-5952	52
36.68005CR	52
36.7003	44
36.7004.5X	44
36.7004	44
36.7005	44
36.7005X	44
36.7006	44
36.7006X	44
36.7007X	44
36.7008.5X	44
36.7008	44
36.7008X	44
36.7009	44
36.7009X	44
36.7010.5X	44
36.7010	44
36.7010X	44
36.7011.5X	44
36.7011X	44
36.7012	44
36.7012X	44
36.7013X	47
36.7014X	44
36.7015	44
36.7018X	44
36.7028X	44
36.7050	44
36.7064X	44
36.720802	51
36.720803	51
36.720804	51
36.720903	51
36.720904	51
36.721004	51
36.721005	51
36.721006	51
36.721202	51
36.721203	51
36.7213564	51
36.721503	51
36.721504	51
36.721508	51
36.721508B	51
36.722004	51
36.730810	50
36.730906	50
36.730906H	50
36.730907	50
36.730907G	50
36.730955	50
36.730955G	50
36.730955H	50
36.731210	50
36.731210H	50
36.731412D	50
36.732115	50
36.80955S	50
36.90810	50
36.9086S	50
36.9088S	50
36.92117	50
36.B380	49
36.K608	48
36.K613	48
36.K616	48
36.K671	48
36.K675	48
36.K676	48
36.K677	48
36.K678	48
36.K679	48
36.K680	48
36.K681	48
36.K683	48
36.K695	48
36.K697	48
36.K698	48
36.K852	48
36.K853	49
37.221/1G	93
37.245P	86
37.250X	87
37.251X	87
37.260	92
37.261	92
37.262	92
37.263	92
37.270	92
37.280	92
37.400	92
38.1215	94
38.1215N	94
38.1215NH	94
38.121N	94
38.121NX	94
38.122	94
38.122A	94
38.122EPDM	94
38.122N	94
38.123	94
38.123EPDM	94
38.123N	94
38.123X	94
38.124	94
38.124N	94
38.125	94
38.125N	94
38.125S	94
38.126	94
38.126N	94
38.128	94
38.128N	94
38.128NH	94
38.128S	94
38.128SX	94
38.130	94
38.130N	94
38.132	94
38.132N	94
38.135	94
38.135N	94
38.136	94
38.137	94
38.138	94
38.139	94
38.139N	94
38.140	94
38.14124	93
38.14572	93
38.152EPDM	47
38.153EPDM	47
38.154EPDM	47
38.155EPDM	47
38.156EPDM	47
38.158EPDM	47
38.160E/K	52
38.160EPDM	47
38.162EPDM	47
38.165EPDM	47
38.170E/K	52
38.170EPDM	47
38.175E/K	52
38.175EPDM	47
38.180NR	47
38.188	52
38.189	52
38.190	52
38.191	52
38.201.5	94
38.202	94
38.203	94
38.204	94
38.205	94
38.205R	94
38.304-1.5	84
38.345522	91
38.400-1.5	82
38.400-10	82
38.400-12	82
38.400-15	82
38.400-20	82
38.400-25	82
38.400-2	82
38.400-3	82
38.400-4	82
38.400-5	82
38.400-6/650	82
38.400-6	82
38.400-8	82
38.401-10	83
38.401-15	83
38.401-20	83
38.401-2	83
38.401-3	83
38.401-4	83
38.401-5	83
38.401-6	83
38.402-0,5	83
38.402-1X	83
38.402-2X	83
38.402-3X	83
38.402-4X	83
38.402-5X	83
38.403-2	83
38.403-3	83
38.403-4	83
38.403-5	83
38.403-6	83
38.403-8	83
38.404-10	84
38.404-12	84
38.404-15	84
38.404-20	84
38.404-2	84
38.404-3	84
38.404-4	84
38.404-5	84
38.404-6	84
38.404-8	84
38.405-10	84
38.405-10X	84
38.405-15	84
38.405-20	84
38.405-40	84
38.405-6	84
38.405-8	84
38.407-3	85
38.407-3C	85
38.407-3G	85
38.407-3X	85
38.407-3XL	85
38.410200	89
38.410201	89
38.410202	89
38.410203	89
38.418	85
38.418N	85
38.420 BOX	85
38.422-1350	92
38.422-1650	92
38.422-1750	92
38.423-1650	92
38.423-1750	92
38.424-1800	92
38.425-3	86
38.425-3C	86
38.425-5	86
38.425-5C	86
38.425N-3	86
38.425N-5	86
38.426-3	86
38.426-3C	86
38.426-5	86
38.426-5C	86
38.426-8C	86
38.427-3C	86
38.427-3GC	86

Vare / Art.	Side / Page
38.428	82
38.429-2	86
38.430-10/70	93
38.430-10/90	93
38.430-5/70	93
38.430-5/80	93
38.430-8/70	93
38.430-8/90	93
38.440-6	92
38.440-6A	92
38.440-8	92
38.440-8A	92
38.440-8X	92
38.449-1200	93
38.449-750	93
38.450-760	93
38.451-1600	93
38.452-1200	93
38.5017530	89
38.5017530	89
38.5501110	91
38.5501210	91
38.623750	91
38.623752	91
38.623764	91
38.8100110	88
38.8100310	88
38.8103110	88
38.9110030	90
38.9117630	90
38.9117631	90
38.9716230	90
38.9726230	88
38.9730030	88
38.9730030S	88
38.9750030	88
38.9971010	93
38.9971020	93
39.103195	69
39.1208P	20
39.1501	102
39.1502	102
39.1503	102
39.1504	102
39.1506	102
39.1507	102
39.1508	102
39.1509	102
39.1510	102
39.1511	102
39.1512	102
39.1513	102
39.1514	102
39.1515	102
39.1616	103
39.1617	103
39.1618	103
39.1620	103
39.1621	103
39.1622	103
39.1623	103
39.1624	103
39.1625	103
39.1626	103
39.1627	103
39.1628	103
39.1630	104
39.1631	104
39.1632	104
39.1633	104
39.1634	104
39.1635	104
39.1636	104
39.1637	104
39.1638	104
39.1639	104
39.1640	104
39.1641	104
39.1642	104
39.1643	104
39.1644	104
39.167G	59
39.168G	59
39.169G	59
39.170G	59
39.171G	59
39.171J	59
39.172	59
39.173	60
39.174	59
39.175H	59
39.175J	59
39.177	59
39.178	59
39.179	59
39.180	63
39.181052	60
39.181052	62
39.181060	60
39.181060	62
39.181061	60
39.181061	62
39.181	63
39.1819	103
39.182	63
39.183	63
39.183A	63
39.183B	63
39.183C	63
39.184	63
39.185	63
39.186	63
39.187	63
39.188	63
39.200200	72
39.2486	70
39.2776	71
39.300300	72
39.300300A	72
39.300300FK	72
39.3010	70
39.3023	71
39.3029	71
39.3051	71
39.3240	70
39.3366	71
39.3381	71
39.3428	71
39.3581	71
39.360	60
39.36412	71
39.3700	71
39.3722	70
39.3726	71
39.3802	71
39.3803	71
39.3803X	70
39.3813	71
39.3815	71
39.3846	70
39.3849	71
39.3868	70
39.3872	70
39.3873	70
39.3874	70
39.3875	70
39.3876	70
39.3878	71
39.3879	71
39.3887	70
39.3904X	70
39.3923	71
39.3925	71
39.3952	71
39.4012	71
39.4025	66
39.4054	71
39.4087	70
39.4110	71
39.4129	71
39.4156	70
39.4178	70
39.4224	71
39.4229	71
39.4244	71
39.4249	71
39.4250	71
39.4251	71
39.4257	71
39.4269	71
39.4310	71
39.4311	71
39.4333	70
39.4380	71
39.4380X	70
39.4381	71
39.4399	70
39.4403	71
39.500500A	72
39.55	71
39.56	71
39.57	71
39.620J	60
39.623J	60
39.624	60
39.625	60
39.626J	60
39.627	60
39.628	60
39.629	60
39.630	61
39.631A	61
39.631X	61
39.632A	59
39.632B	59
39.632C	59
39.632J	59
39.634	61
39.634P	61
39.635	62
39.635X	62
39.636	62
39.636H	62
39.636X	62
39.637	60
39.638	60
39.642X	61
39.643X	61
39.644	61
39.645	64
39.646	60
39.647	61
39.648	61
39.649	61
39.650	61
39.651A	61
39.652	61
39.653	61
39.654	103
39.655	103
39.656	62
39.657	62
39.658	62
39.659	62
39.660	62
39.661	62
39.662	62
39.663	62
39.664	62
39.665	62
39.674	70
39.678	70
39.678X	70
39.680H-1180	70
39.680H	70
39.680X	70
39.684X	70
39.684XS	70
39.685	70
39.69	71
39.79	71
39.93	71
39.AV2024	69
39.AV30	69
39.AV5068	69
39.AV50	69
39.AV9580	69
39.B100/30	68
39.B100/40	68
39.B100/50	68
39.B100/75	68
39.B16/18	65
39.B20/10-M6	65
39.B20/10	65
39.B20/15	65
39.B2020	65
39.B25/25-M6	66
39.B25/25	66
39.B2513	65
39.B30/20	66
39.B30/20X	66
39.B30/30-M6	66
39.B30/30	66
39.B40/20	66
39.B40/30	66
39.B40/35	66
39.B50/21	67
39.B50/30	67
39.B50/50-M10	67
39.B50/50	67
39.B60/30	67
39.B60/40	67
39.B75/30	68
39.B75/40	68
39.B75/50	68
39.BUMPER	97
39.BUMPERB	97
39.BUMPERC	97
39.BUMPERD	97
39.BUMPERE	97
39.C100/40	68
39.C100/50	68
39.C100/75	68
39.C150/40	68
39.C150/50	68
39.C150/75	68
39.C20/10	65
39.C20/20	65
39.C200/100	68
39.C25/10	65
39.C25/15	66
39.C25/25-M6	66
39.C30/20	66
39.C30/30	66
39.C40/25	66
39.C40/30	66
39.C40/40-M10	66
39.C40/40	66
39.C50/20	67
39.C50/25	67
39.C50/30-68	67
39.C50/30-M8	67
39.C50/30	67
39.C50/35	67
39.C50/40-M12	67
39.C50/40	67
39.C50/45	67
39.C60/30-M8	67
39.C60/30	67
39.C60/40-M10	67
39.C60/40-M12	67
39.C60/40	67
39.C65/35.M10	67
39.C65/35	67
39.C70/45-M10	68
39.C75/100-M16	68
39.C75/100	68
39.C75/30-M10	68
39.C75/30	68
39.C75/55-43	68
39.C75/55-M10	68
39.C75/55	68
39.D10/10	65
39.D100/30	68
39.D100/50	68
39.D100/75	68
39.D15/10-M6	65
39.D15/10	65
39.D15/15-M6	65
39.D15/15	65
39.D150/50	68
39.D20/15E	65
39.D20/20-M6	65
39.D20/20	65
39.D200/100	68
39.D30/10-M6	66
39.D30/10	66
39.D30/15-M6	66
39.D30/15	66
39.D30/20-M6	66
39.D30/20	66
39.D30/30-M6	66
39.D30/30	66
39.D40/15-M6	66
39.D40/15	66
39.D40/20-A2	66
39.D40/20-M10	66
39.D40/20-M6	66
39.D40/20	66
39.D40/25-A2	66
39.D40/30-A2	66
39.D40/30-M8	66
39.D40/30	66
39.D40/35-A2	66
39.D40/35	66
39.D40/40-A2	66
39.D40/40	66
39.D40/45-A2	66
39.D50/20-M12	67
39.D50/20	67
39.D50/25-M12	67
39.D50/25	67
39.D50/30-M10	67
39.D50/30	67
39.D60/30-M12	67
39.D60/30	67
39.D60/40.M12	67
39.D60/40	67
39.D6050	67
39.D65/35	67
39.D70/40-M12	67
39.D70/40	67
39.D70/70	67
39.D75/30	68
39.D75/50-M10	68
39.DC300300	74
39.DD300300	73
39.E100/25	68
39.E100/30	68
39.E100/40	68
39.E100/50	68
39.E100/75	68
39.E150/50-M20	68
39.E150/50	68
39.E150/75-M20	68
39.E150/75	68
39.E20/10-M6	65
39.E20/10	65
39.E200/100	68
39.E25/10-M6	65
39.E25/10	65
39.E30/15-M6	66
39.E30/15	66
39.E30/20-M6	66
39.E30/20	66
39.E30/30-M6	66
39.E30/30	66
39.E30/35	66
39.E40/15-SH43	66
39.E40/20-M6	66
39.E40/20	66
39.E40/30	66
39.E50/20-M10	67
39.E50/20-M12	67
39.E50/20	67
39.E50/25-M12	67
39.E50/25	67
39.E50/40-M12	67
39.E50/40	67
39.E60/30-M12	67
39.E60/30	67
39.E60/40-M12	67
39.E60/40	67
39.E70/35	67
39.E70/50	67
39.E75/30-M12	68
39.E75/30	68
39.E75/50-M12	68
39.E75/50	68
39.E80/50-M16	68
39.E80/50	68
39.KD25/17	69
39.KD50/18	69
39.KD50/50	69
39.KP-D10/10	69
39.KP-D115/136	69
39.KP-D118/77	69
39.KP-D15/22	69
39.KP-D20/15	69
39.KP-D25/16	69
39.KP-D25/20	69
39.KP-D30/30	69
39.KP-D30/36	69
39.KP-D50/58	69
39.KP-D50/61	69
39.KP-D50/67	69
39.KP-D60/40	69
39.KP-D70/58	69
39.KP-D70/60	69
39.KP-D75/89	69
39.KP-E10/10	69
39.KP-E115/136	69
39.KP-E118/77	69
39.KP-E15/22	69
39.KP-E20/15	69
39.KP-E20/24	69
39.KP-E25/16	69
39.KP-E25/20	69
39.KP-E30/30	69
39.KP-E30/36	69
39.KP-E35/40	69
39.KP-E50/50	69
39.KP-E50/61	69
39.KP-E50/67	69
39.KP-E50/68	69
39.KP-E60/40	69
39.KP-E70/58	69
39.KP-E70/60	69
39.KP-E75/89	69
39.KP-E95/80	69
39.M1810	65
39.M20/10-M6	65
39.M20/10	65
39.M2015	65
39.M2020-M8	65
39.M2020	65
39.M24	61
39.M2515	66
39.M2520-M6	66
39.M2520	66
39.M30/10	66
39.M3015-M8x12	66
39.M3015-M8x15	66
39.M3020-55	66
39.M3020	66
39.M3030-SS	66
39.M3030	66
39.M40/20	66
39.M40/40	66
39.M4030	66
39.M4038	66
39.M5025	67
39.M5030	67
39.M5040	67
39.M5045	67
39.M5050	67

Varenummerindex / product number index

Vare Art.	Side Page
39.M6035	67
39.M6050	67
39.M7540	68
39.M7550	68
39.M7560	68
39.M8050	68
39.SC300300	74
39.SD300250	73
39.SD300300	73
41.13459	28
41.13459X	28
41.333S	20
41.670	28
41.674A	20
41.675A	20
41.678	20
45.102G	57
45.123	58
45.2031024	58
45.20511046	58
45.20511091	58
45.2051445	58
45.205S	29
45.205SX	29
45.206AL	56
45.208	29
45.209BX	29
45.210B	29
45.210BX	29
45.210C	29
45.210CX	29
45.216C-50	57
45.217C	56
45.221C	56
45.224	56
45.235N1057	58
45.235N429	58
45.235NG1057	58
45.235NG429	58
45.308C-50	57
45.308C	57
45.309C-50	57
45.309C	57
45.347C	56
45.383C	56
45.388C	56
45.393	58
45.394	58
45.705C	56
45.832	56
45.836	56
45.837	56
45.839	56
45.872	56
45.874	56
45.882	56
45.884C	56
45.886	57
45.886G	57
45.894	57
45.901	58
45.980A	57
45.980K	57
45.980S	57
48.442	81
48.451	80
48.452	80
48.542	81
48.544A	81
48.603	79
48.604	79
48.605	80
48.605B	80
48.605X	80
48.605Y	80
48.608	80
48.609	80
48.612	81
48.613K	79
48.618	81
48.621	80
48.622	80
48.622X	80
48.623	80
48.623X	80
48.624	80
48.626	79
48.634	79
48.634F	79
48.634K	79
48.634KF	79
48.635	79
48.635F	79
48.635K	79
48.635KF	79
48.636	79
48.636F	79
48.636FX	79
48.636K	79
48.636KF	79
50.083000GG	32
50.083000SS	32
50.083013	30
50.083015GG	30
50.083015GGX	30
50.083030	30
50.083032GG	30
50.083033	30
50.083033X	30
50.083040	30
50.083040G	30
50.083040GG	30
50.083040GS	30
50.083045G	30
50.083045X	30
50.083050	30
50.083050G	30
50.083050GG	30
50.083052G	31
50.083055G	31
50.083059	31
50.083060	31
50.083060G	31
50.083061	31
50.083065	31
50.083065G	31
50.083070B	31
50.083070G	31
50.083080G	31
50.083080GG	31
50.083081	31
50.083088	31
50.083089	31
50.083090	32
50.083095	32
50.083095B	32
50.083095G	32
50.13621	96
50.241NR	95
50.242NR	95
50.243NR	96
50.244NR	95
50.245H	95
50.245NR	95
50.246-10	95
50.246NR	95
50.247-10	95
50.247NR	95
50.250	96
50.260-10	18
50.260-4	18
50.260-5	18
50.260-6	18
50.260-8	18
50.261	96
50.263	96
50.263K	96
50.264-10	95
50.264	96
50.265-10	95
50.265	95
50.266	95
50.267	96
50.267NR	96
50.269	96
50.271	95
50.275	95
50.276	95
50.280	96
52.13689-5	101
52.13689A	101
52.13689B	101
52.13689C	101
52.269	38
52.269X	38
52.CWC8	63
52.PP106	27
54.261700J-5	98
54.261700JC-5	98
54.261700JD-5	98
54.261700JX-5	98
54.261720J-5	98
54.261740J-5	98
54.261760J-5	98
54.261780J-5	98
54.710290	25
54.710720	30
54.710770	31
54.710780	32
57.400/1	76
57.400/2	76
57.400/3	76
57.401/1	76
57.401/2	76
57.401/3	76
57.402/1	76
57.402/2	76
57.402/3	76
57.403/1	76
57.403/2.5J	77
57.403/2	76
57.403/3	76
57.404/1	76
57.404/2	76
57.404/3	76
57.405/1	76
57.405/2	76
57.405/2J	77
57.405/3	76
57.406/1	76
57.406/2	76
57.406/3	76
57.407/1	76
57.407/2	76
57.407/3	76
57.440/1	76
57.440/2	76
57.440/3	76
57.441/1	76
57.441/2	76
57.441/3	76
57.442/1	76
57.442/2	76
57.442/3	76
57.443/1	76
57.443/2	76
57.443/2JP	77
57.443/3	76
57.444/1	76
57.444/2	76
57.444/3	76
57.445/1	76
57.445/2	76
57.445/3	76
57.446/1	76
57.446/2	76
57.446/3	76
57.447/1	76
57.447/2	76
57.447/3	76
63.55030	81
68.4250	81
79.051	96
79.051A	96
79.052	96
79.053	96
79.054	96
79.055	96
83.842	105
84.840084	105
84.930	105
84.931	105
84.932T	105
84.934	105
84.934X	105
84.935	105
84.961	105
87.082020	106
87.1034	106
87.1035	106
87.1738	106
87.1739	106
87.2000	106
87.51989	106
87.52759	106
87.705I	106
87.723	106
87.727	106
87.770/10	106
D-fender	72
D-fender	72
D-fender	72
DC-fender	74
DD-fender	73
Keyhole fender	75
KF-A-fender	75
KF-B-fender	75
KF-C-fender	75
KF-D-fender	75
MC-fender	75
S10.3301	105
S10.3303	105
S10.3311	105
S10.3312	105
S10.3313	105
S10.3314	105
SC-fender	74
SD-fender	73
Wing-type-fender	75

Kemisk betegnelse Chemical Nomenclature	Natur-kautsjuk Naturel Rubber	Styrolbutadien-Kausjuk Styrol Butadien Rubber (Buna)	Nitril kausjuk (Perbunan) Nitril Rubber (Perbunan)	Chlororen kausjuk (Neopren) Chloroprene Rubber (Neoprene)	Ethylen propylen kausjuk (APTK) Ethylene Propylene Dien Rubber
Navnefortegnelse i.h.t. ASTM D 1418 Abbreviation as per ASTM D 1418	NR	SBR	NBR	CR	EPDM
Hårdhedsområde (Shore A)(±5) Hardness Range (Shore A)(±5)	40 - 90	45 - 90	45 - 90	40 - 90	40 - 90
Trækstyrke N/mm^2 Tensile Strength N/mm^2	4 - 15	4 - 15	4 - 14	5 - 15	6 - 13
Tilbagestødselasticitet ved 20°C Recoil Elasticity at 20°C	Udmærket Excellent	God Good	Tilfredsstillende Satisfactory	God Good	God Good
Slidstyrke Abrasion Resistance	Meget god Very good	Meget god Very good	God Good	God Good	God Good
(1) Kemisk bestandighed (1) Chemical Resistance	God Good	God Good	Tilfredsstillende Satisfactory	God Good	Meget god Very good
(1) Oliebestandighed (1) Oil Resistance	Ringe Low	Ringe Low	Udmærket Excellent	God Good	Ringe Low
(1) Bestandighed overfor benzin (1) Petrol Resistance	Ingen None	Ringe Low	God Good	Ringe Low	Ringe Low
(1) Bestandighed overfor opløsningsmidler (1) Solvent Resistance	Ringe Low	Ringe Low	God Good	God Good	(3) Tilfredsstillende (3) Satisfactory
(4) Temperaturbestandighed °C (4) Temperature Stability in °C	-40 til +80° -40 to +80°	-30 til +80° -30 to +80°	-30 til +100° -30 to +100°	-25 til +100° -25 to +100°	-40 til +100° -40 to +100°
Ozonbestandighed Ozone Resistance	Tilfredsstillende Satisfactory	Tilfredsstillende Satisfactory	Tilfredsstillende Satisfactory	Meget god Very good	Udmærket Excellent
Vejrbestandighed General Climate Resistance	God Good	God Good	God Good	Meget god Very good	Udmærket Excellent
Gasuigennemtrængelighed Gas Impermeability	Tilfredsstillende Satisfactory	Tilfredsstillende Satisfactory	God Good	God Good	Tilfredsstillende Satisfactory
(2) Modstand mod blivende deformering (2) Resistance to permanent set	Meget god Very good	God Good	God Good	God Good	God Good
Bindekraft til metal Adhesion to metal	Udmærket Excellent	Meget god Very good	Tilfredsstillende Satisfactory	God Good	Tilfredsstillende Satisfactory
Bindekraft til tekstiler Adhesion to textile	Udmærket Excellent	God Good	Tilfredsstillende Satisfactory	Udmærket Excellent	Tilfredsstillende Satisfactory

(1) = På grund af mange mulige kemikalier, opløsningsmidler, arbejdstemperaturer og arbejdstider kan de oplyste værdier, i enkelte tilfælde, udvise forandringer. Især kan en elastomeretype, som normalt udviser ringe bestandighed, udvise en meget god resistens overfor bestemte medier.

(2) = Ved relative lave h.h.v. høje te,peraturer reduceres modstanden normalt.

(3) = God udvidelsesbestandighed overfor forskellige blødgørere.

(4) = Det drejer sig om grænseværdier, som kan svinge alt efter sammensætningen af blandingen. Vedvarende indsætning i grænseområderne ændrer de fysiskeværdier. Til ekstreme påvirkninger kræves særlige elastomere-blandinger.

(1) = In view of the multitude of chemicals, solvents, application temperatures and times the value quoted may vary in some cases. For example one type of elastomer which normally has only low resistance properties could show very good resistance to certain media.

(2) = At relatively high or low temperatures, resistance generally drops.

(3) = Good expansion resistance to various ester based plasticizers.

(4) = These are borderline values which, depending on composition of the mixture, can vary.
If used permanntly in such borderline areas, this can lead to a change in the physical values. For such extreme applications it is advisable to use special elastomer mixtures.

DEVELOPMENT

LOGISTICS

SUPPORT

SINDBY
A BIBUS GROUP COMPANY

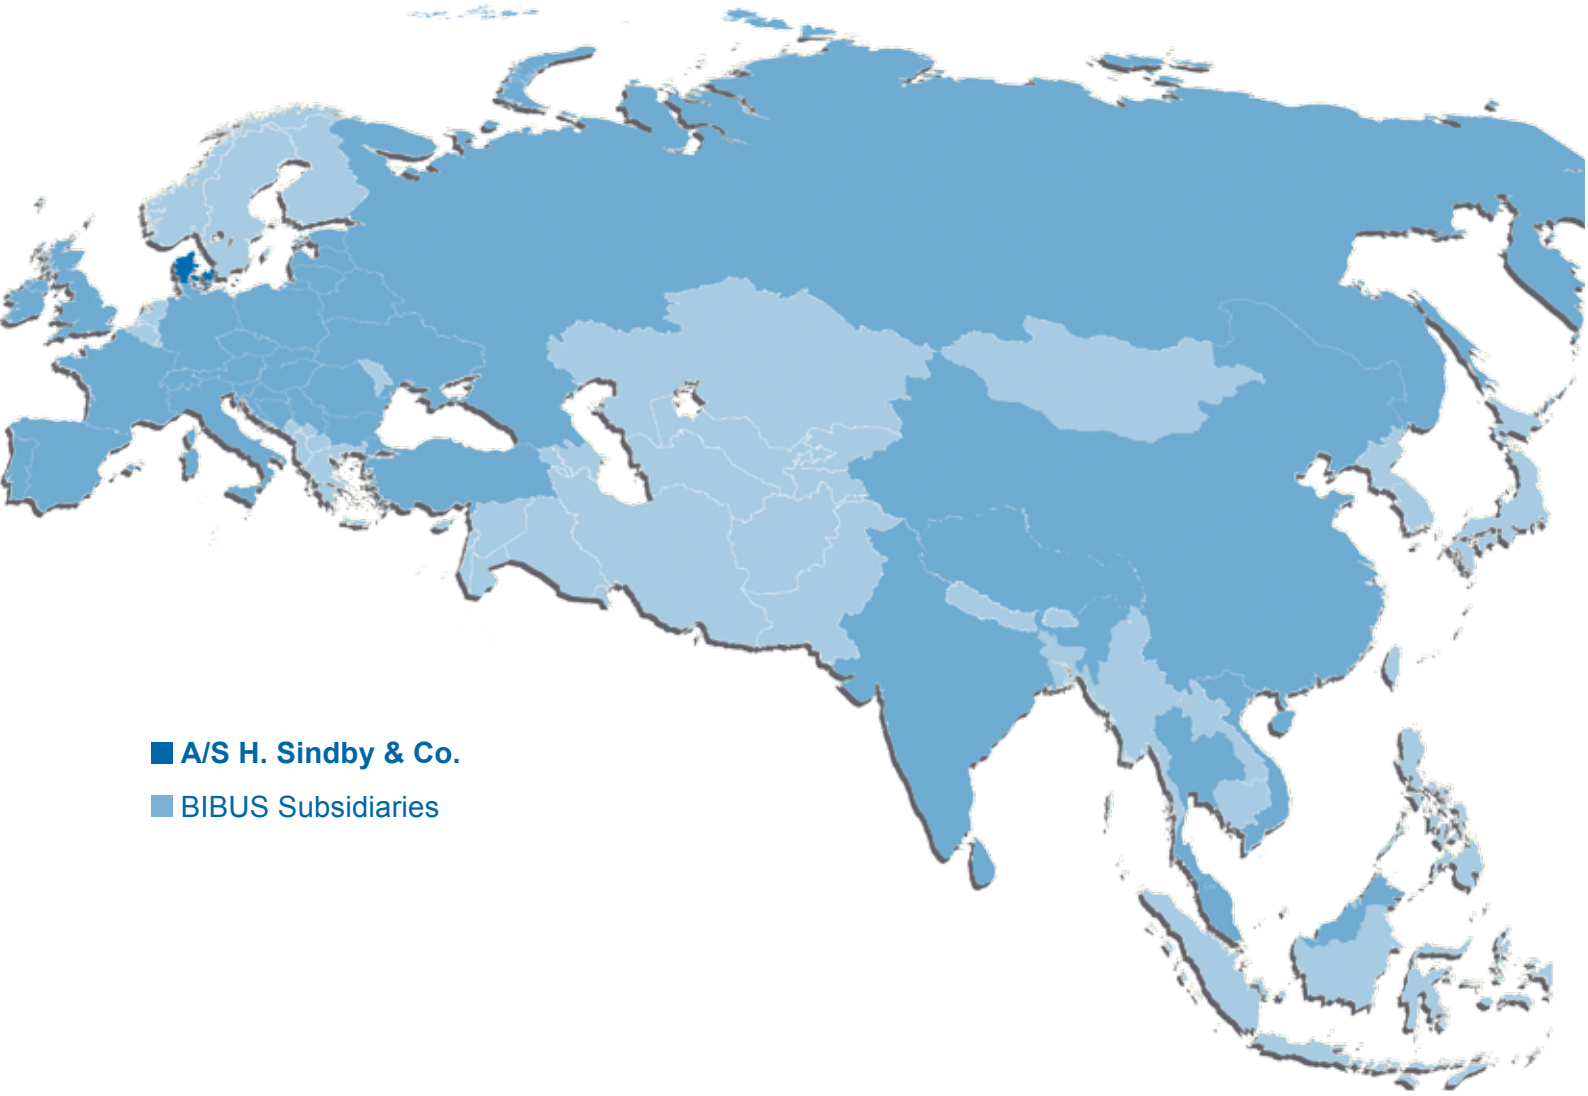

■ **A/S H. Sindby & Co.**

■ BIBUS Subsidiaries

A/S H. Sindby & Co.
Edisonvej 11
DK-7100 Vejle

Tel. +45 75 88 21 22
Fax +45 75 88 21 21

sindby@sindby.dk

www.prinfovejle.dk
00129-4-K201703